


Tantalum, MnO₂ Tantalum, High Temperature, T499, 2.2 uF, 10%, 10 V, 3216, SMD, MnO₂, Molded, Hi-Temp, 175C, Auto, AEC-Q200, N/A, 8 Ohms, Height Max = 1.8mm

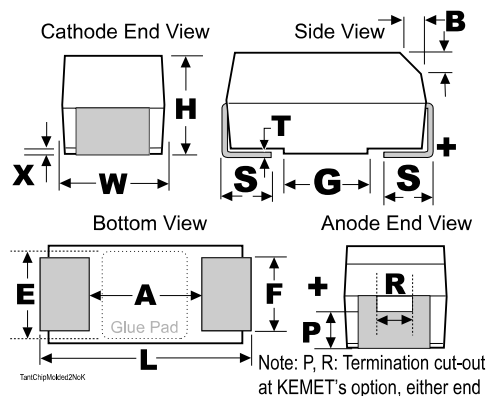

General Information

Dielectric:	MnO ₂ Tantalum
Style:	SMD Chip
Series:	T499
Description:	SMD, MnO ₂ , Molded, Hi-Temp, 175C, Auto, AEC-Q200
Features:	Automotive, 175C
RoHS:	Yes
Termination:	Tin
Approvals:	AEC-Q200
AEC-Q200:	Yes

Dimensions

Footprint	3216
L	3.2mm +/-0.2mm
W	1.6mm +/-0.2mm
H	1.6mm +/-0.2mm
T	0.13mm REF
S	0.8mm +/-0.3mm
F	1.2mm +/-0.1mm
A	1.2mm MIN
B	0.4mm +/-0.15mm
E	1.3mm REF
G	1.1mm REF
P	0.4mm REF
R	0.4mm REF
X	0.1mm +/-0.1mm

Specifications

Capacitance:	2.2 uF
Capacitance Tolerance:	10%
Voltage DC:	10 VDC (85C), 7.78 VDC (125C), 3.3 VDC (175C)
Temperature Range:	-55/+175C
Dissipation Factor:	6% 120Hz 20C
Failure Rate:	N/A
Resistance:	8000 mOhms (100kHz)
Current:	97 mAmps (100kHz 25C), 87.3 mAmps (85C), 19.4 mAmps (175C)
Leakage Current:	0.5 uAmps (5min 20C)

Packaging Specifications

Weight:	58.6 mg
Packaging:	T&R, 178mm
Packaging Quantity:	2000