
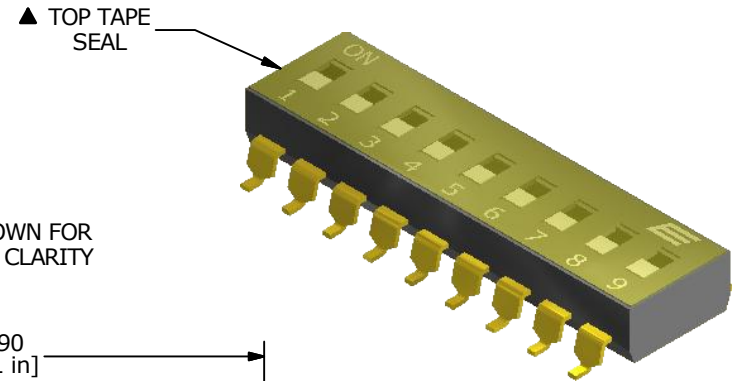
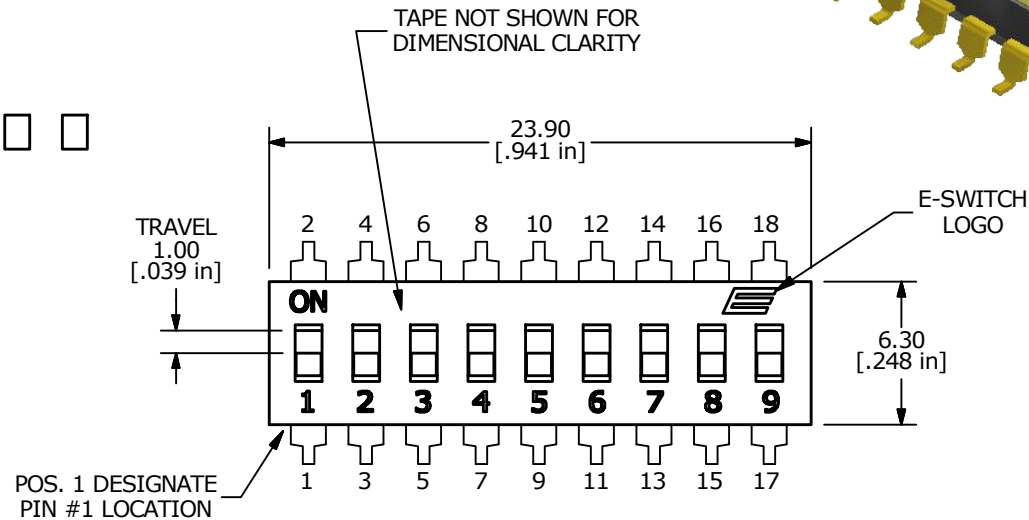
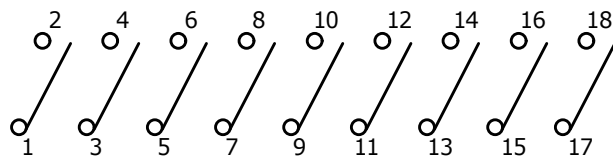


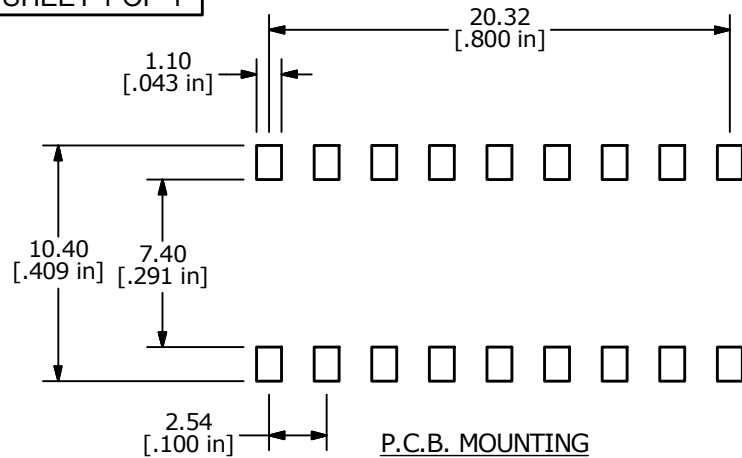


## NOTES:

1. ALL DIMENSIONS IN MM [INCH].
2. GENERAL TOLERANCE: X.X =  $\pm 0.4$   
X.XX =  $\pm 0.25$
3. TERM. NUMBERS FOR REFERENCE ONLY.
4. CONTACT RATINGS: 25mA @24VDC. (SWITCH)  
100mA @50VDC. (CARRY)

## ▲ 5. CONTACT MATERIAL:

CONTACTS: (MOVABLE) COPPER W/GOLD PLATE  
 TERMINALS: BRASS W/GOLD PLATE

6. INSULATION RESISTANCE; 100 M $\Omega$  MIN. @500VDC
7. CONTACT RESISTANCE; 50 m $\Omega$  MAX INITIAL
8. OPERATING TEMP: -20°C TO +85°C
9. STORAGE TEMP: -40°C to +85°C
10. ELECTRICAL LIFE: 2000 CYCLES.
- ▲ 11. PACKAGE: TUBE (22 PER TUBE) WITH ALL POLES IN THE "OFF" POSITION
12. ▲ DENOTES CRITICAL PARAMETER.
13. DIELECTRIC STRENGTH: 500VAC MIN FOR 1 MINUTE
- ▲ 14. OPERATING FORCE: 1000 GRAMS MAX.
15. 2011/65/EU(ROHS) COMPLIANT.

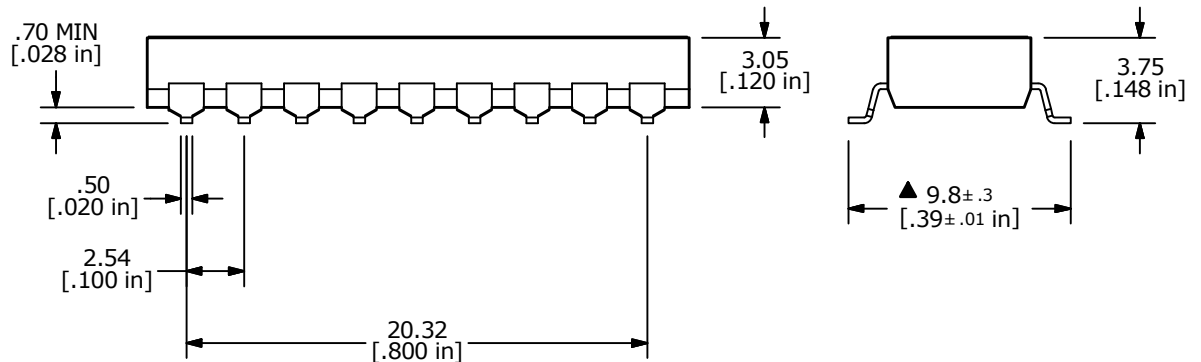

|     |        |                         |         |    |
|-----|--------|-------------------------|---------|----|
| A   | 23210  | RELEASED FOR PRODUCTION | 2/13/18 | MW |
| REV | PCR NO | DESCRIPTION             | DATE    | BY |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY  
 TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE KAE09TGGT

|              |                   |          |                |          |
|--------------|-------------------|----------|----------------|----------|
| SCALE<br>2:1 | DATE<br>2/12/2018 | DR<br>MW | DWG<br>N801114 | REV<br>A |
|--------------|-------------------|----------|----------------|----------|