
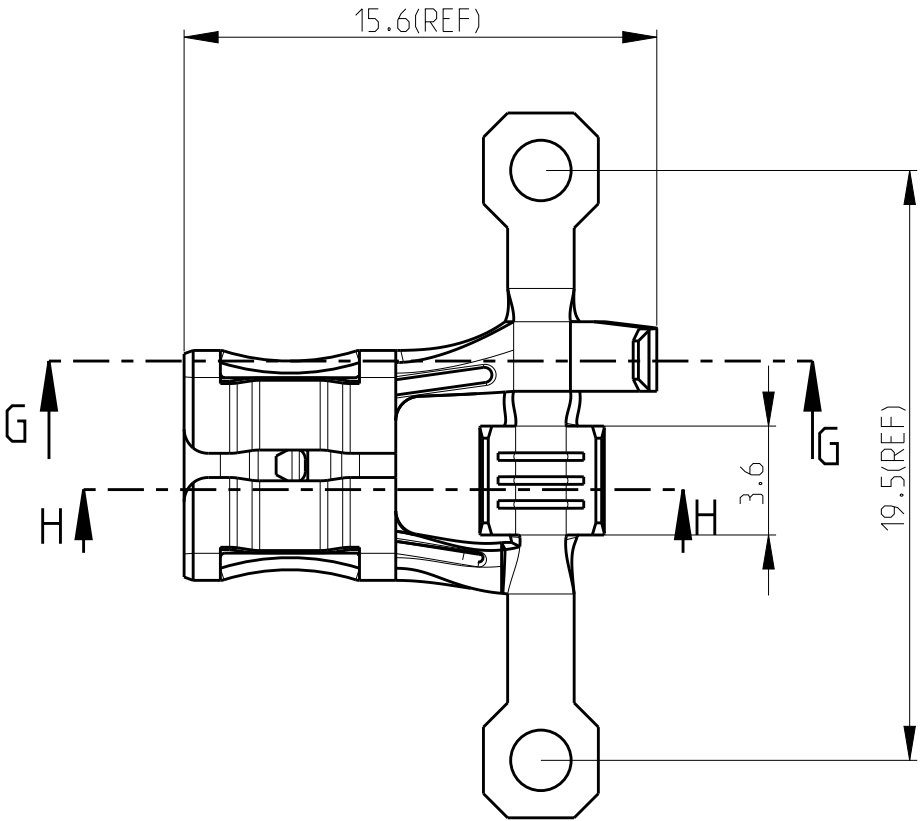






2

1

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
—	—		A	RELEASE PER ECR-14-018864	24DEC2014	DL	TD
			A1	RELEASE PER ECR-15-004911	31MAR2015	DL	TD
			A2	RELEASE PER ECR-15-013713	21SEP2015	DL	TD

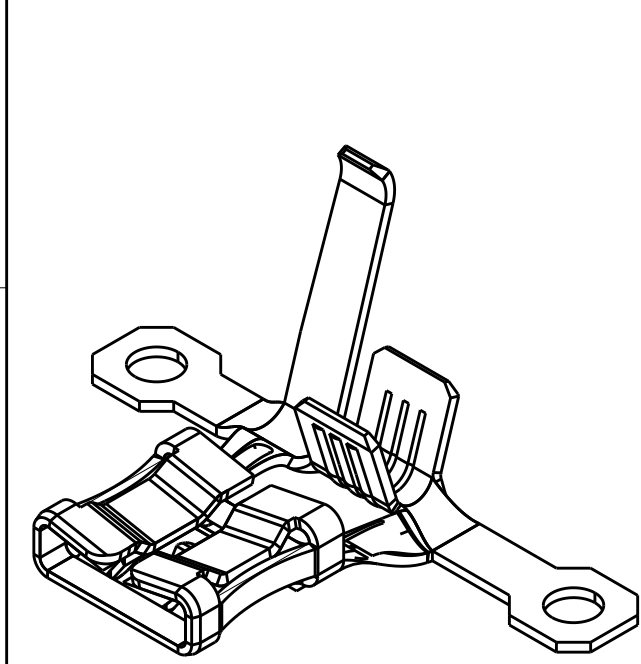

- NOTE:
1. CONTINUOUS STRIP ON REELS
 2. MATING TAB ACCORDING TO UL310 AND IEC61210 NORM. (WIDTH*THICKNESS IS 6.3*0.8 mm)
 3. WIRE SIZE IS #16-#12 AWG(1.5-3.3 sqmm)
 4. INSULATION RANGE IS Ø2.7-3.8mm
 5. CUT-OFF LENGTH IS 0.5mm MAX.

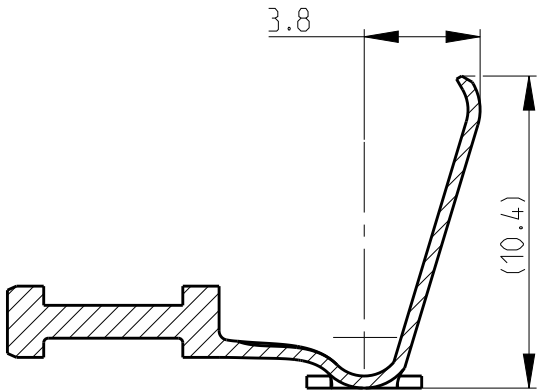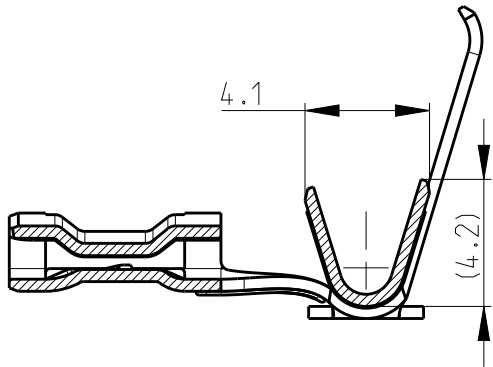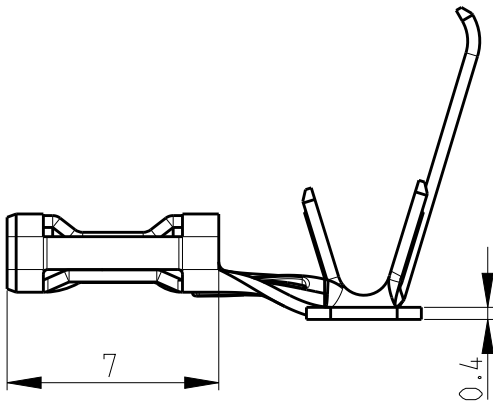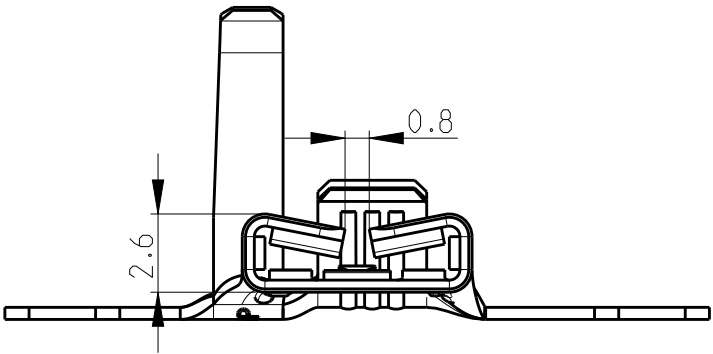

SECTION H-H

SECTION G-G

Pre-NICKEL	Steel	2178439-1
FINISH	MATERIAL	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN VIBHUTHI 29NOV2012	TE Connectivity			
DIMENSIONS: mm		CHK SUBHASH M 29NOV2012				
		APVD SURESH T N 29NOV2012	NAME 6.3 SRS FLAG F-SPRING LIF RECEPTACLE			
		PRODUCT SPEC 108-64027	-			
MATERIAL SEE TABLE		APPLICATION SPEC 114-64027	SIZE A3			
		WEIGHT -	CAGE CODE 00779			
FINISH SEE TABLE		Customer Drawing	DRAWING NO C-2178439			
		SCALE 4:1	SHEET 1 OF 1			
			REV A2			