REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE

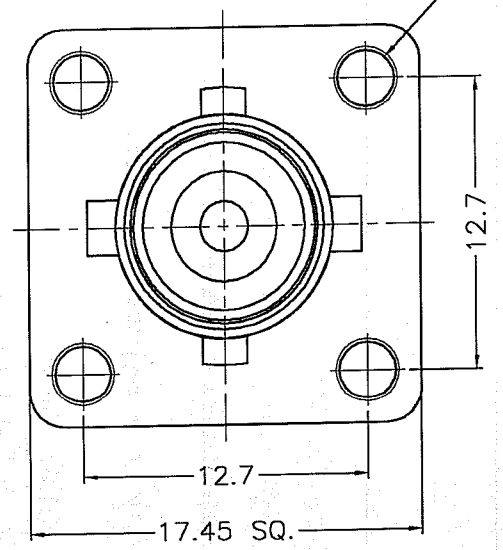

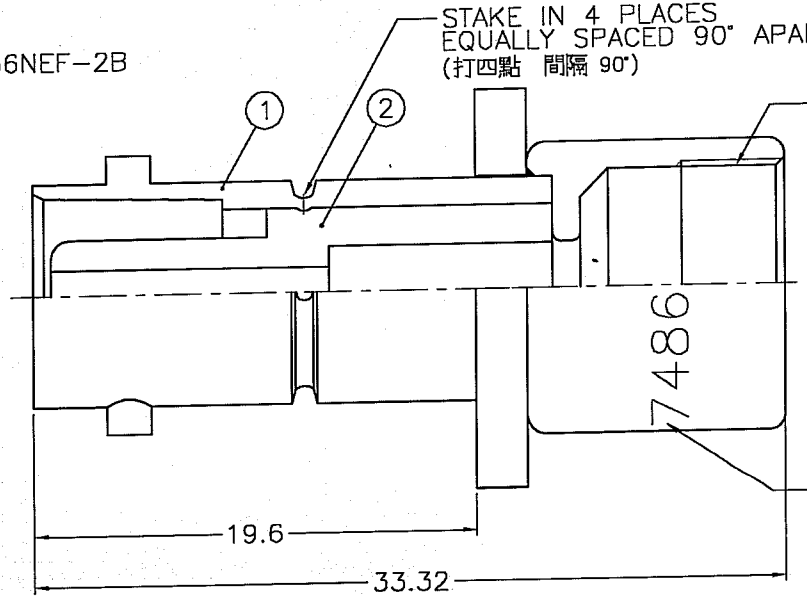

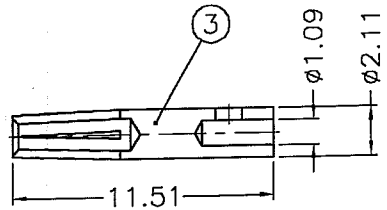

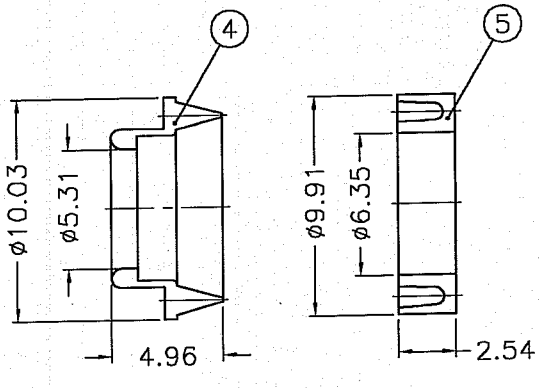

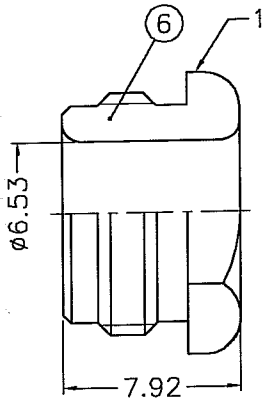

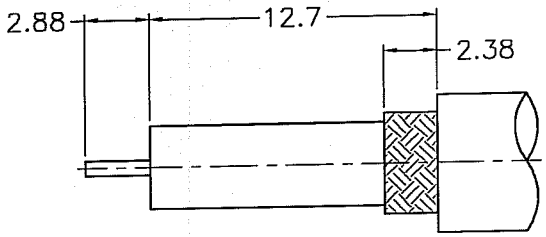

RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
2. BERYLLIUM COPPER PER QQ-C-530
3. TEFLON PER MIL-P-19468
4. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
5. SILVER PL. 200 MIN. THICK OVER COPPER STRIKE

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
6	CLAMP NUT	NOTE 1	NOTE 4	1	31-1428-3
5	GASKET	SILICONE	RED	1	31-1051-2
4	BRAID CLAMP	NOTE 1	NOTE 4	1	82-1551-3
3	CONTACT PIN	NOTE 2	NOTE 5	1	28178
2	INSULATOR	NOTE 3	NATURAL	1	28179
1	BODY S/A	NOTE 1	NOTE 4	1	31-12460

DIMENSIONS ARE IN MILLIMETERS

UNLESS OTHERWISE SPECIFIED TOLERANCES
0.5-6 = ±0.2
6-30 = ±0.4
30-120 = ±0.6
120-315 = ±1
315-1000 = ±1.6
1000-2000 = ±2.4

SCALE	3/1	ISSUE	A1

FILE NO. F:\DWG\CNPD\28175-A1SZ

PART NO.

APPROVED	Tom	DATE 10-29-03'
CHECKED	Linda	DATE 10-29-03'
DRAWN	Linda	DATE 10-29-03'

Amphenol
Danbury,CT,USA-Tainan,Taiwan-Shenzhen,China

TITLE MHV PANEL JACK
FOR RG-59/U RG-62/U CABLE

DRAWING NO. 28175

ITEM NO. 28175