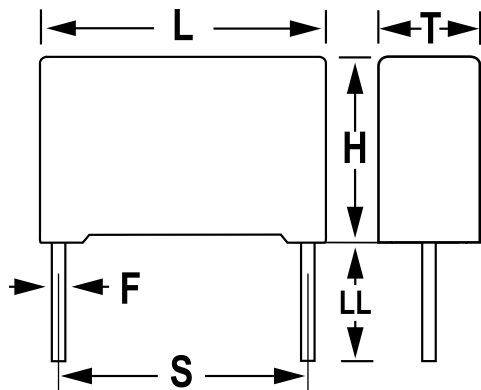


R46\_275\_125C, Film, Metallized Polypropylene, Safety, 0.33 uF, 20%, 275 VAC (X2), 560 VDC, 125°C, Lead Spacing = 22.5mm

**Dimensions**

L	26.5mm +0.3mm
H	16mm +0.1mm
T	7mm +0.2mm
S	22.5mm +/-0.4mm
LL	4mm +2mm
F	0.8mm +/-0.05mm

**Packaging Specifications**

Packaging:	Bulk, Bag
Packaging Quantity:	700

**General Information**

Series:	R46_275_125C
Dielectric:	Metallized Polypropylene
Style:	Radial
Features:	EMI Safety
RoHS:	Yes
Lead:	Cut
Qualifications:	ENEC, UL, cUL, CQC
AEC-Q200:	No

**Specifications**

Capacitance:	0.33 uF
Capacitance Tolerance:	20%
Voltage AC:	275 VAC (X2)
Voltage DC:	560 VDC
Temperature Range:	-40/+125°C
Rated Temperature:	125°C
Dissipation Factor:	0.1% 1kHz
Insulation Resistance:	100 GOhms
Max dV/dt:	200 V/us
Safety Class:	X2