

Han 10Ex UL-M-c

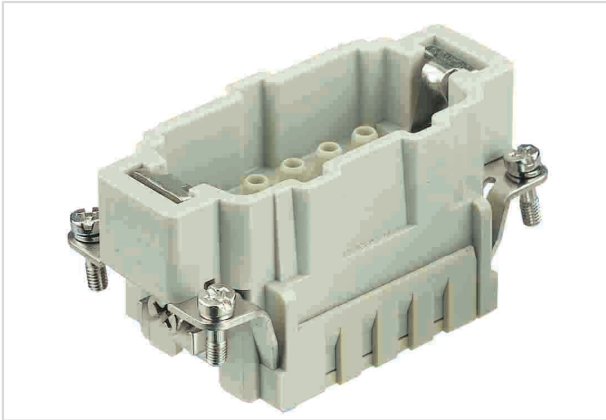


Image is for illustration purposes only. Please refer to product description.

Part number	09 36 510 2602
Specification	Han 10Ex UL-M-c
HARTING eCatalogue	https://b2b.harting.com/09365102602

Identification

Category	Inserts
Series	Han [®] Ex

Version

Termination method	Crimp termination
Gender	Male
Size	10 B
With wire protection	0
Number of contacts	10
PE contact	1
Details	Please order crimp contacts separately. for US purposes only
Details	ATTENTION! Only to be used with Han [®] Ex hoods and housings!

Technical characteristics

Conductor cross-section	[0,14] ... [4 mm ²]
Rated current	16 A
Rated voltage	90 V
Insulation resistance	>10 ¹⁰ Ω
Limiting temperature	[-20] ... [+40 °C]
Mating cycles	≥500



Pushing Performance

Material properties

Material (insert)	Polycarbonate (PC)
Colour (insert)	RAL 7032 (pebble grey)
Material flammability class acc. to UL 94	V-0
RoHS	compliant
ELV status	compliant
China RoHS	e
REACH Annex XVII substances	No
REACH ANNEX XIV substances	No
REACH SVHC substances	No

Specifications and approvals

CE	0
----	---

Commercial data

Packaging size	1
Net weight	0.045 kg
Country of origin	Germany
European customs tariff number	85389099
eCl@ss	27440205 Contact insert for industrial connectors