




CONTACT CONFIGURATION
TIMING (MBB) SHORTING

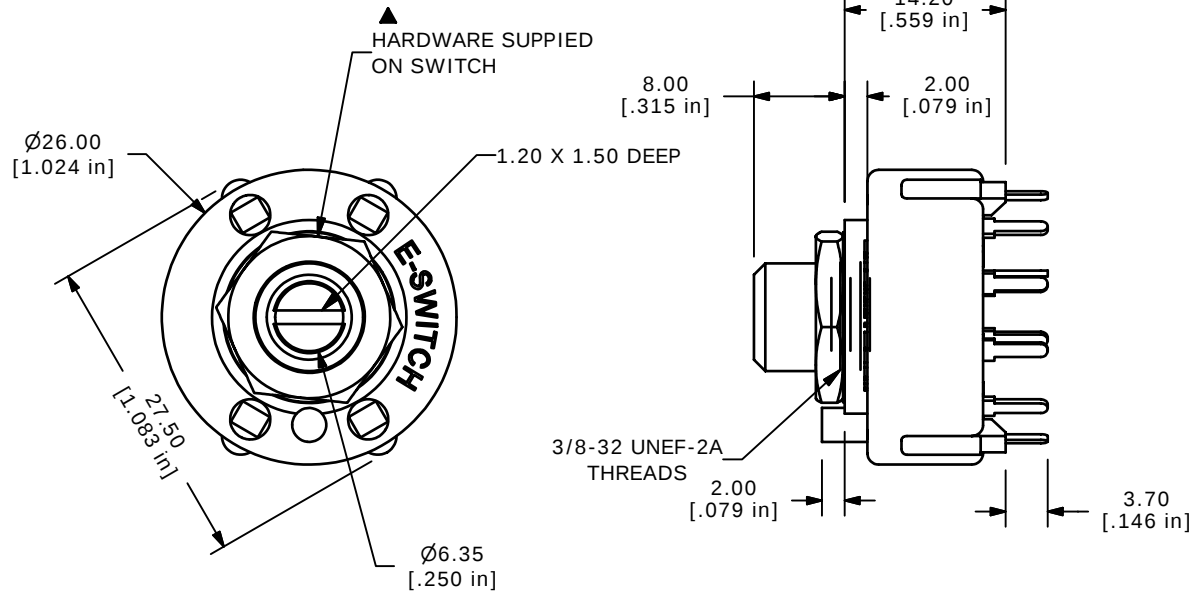

ISOMETERIC

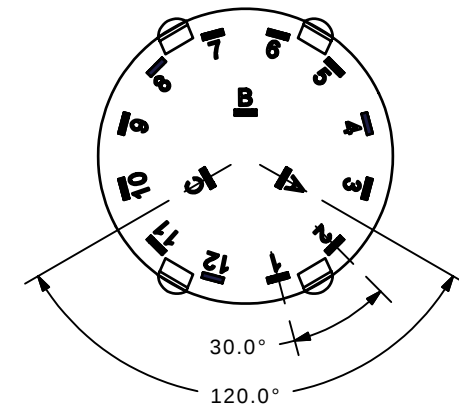

NOTE:

1. ALL DIMENSIONS IN MM[INCH].
2. GENERAL TOLERANCE: ± 0.4
3. TERM. NOS. FOR REFERENCE ONLY.
- ▲ 4. CONTACT MATERIAL: SILVER
5. CONTACT RATING: 0.3A @125VAC
6. OPERATING FORCE 800 $\pm$ 300 GRAMS-CM
7. OPERATING TEMP: -30°C TO 85°C
- ▲ 8. CIRCUIT 3P: 4 POSITION 30° INDEX.
9. DIELECTRIC STRENGTH: 500VAC FOR 1 MINUTE
- ▲ 10. HARDWARE SUPPLIED ON SWITCH:
LOCKWASHER, HEXNUT, STOP RING
11. ▲ DENOTES CRITICAL PARAMETER.

E-SWITCH®

TITLE KC34D01SPS

A	15136	RELEASED FOR PRODUCTION	8/12/05	PV
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE	DATE	DR	DWG	REV
1.5:1	8/12/2005	PV	G510605	A