

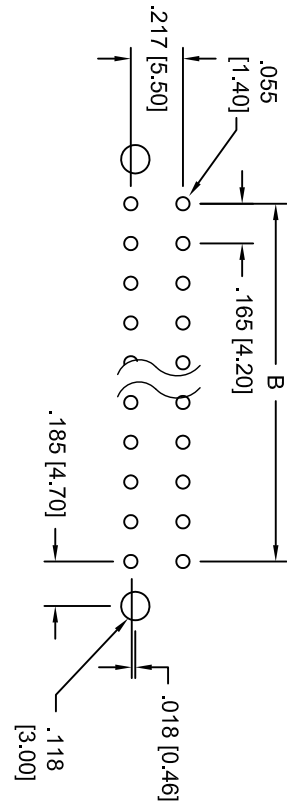
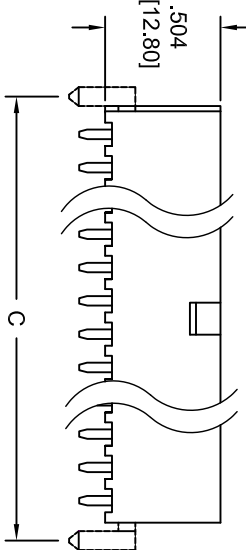


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/31/10	

APPROVED: _____
 DATE: _____ TITLE: _____

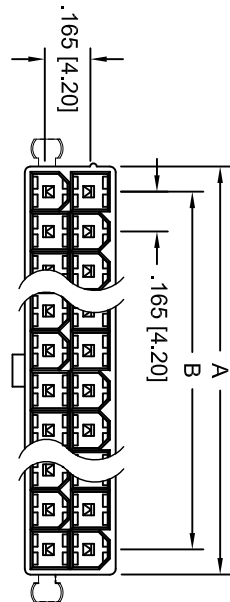

RECOMMENDED PCB LAYOUT



A = .165 [4.20] x No. of Spaces + .213 [5.40]
 B = .165 [4.20] x No. of Spaces
 C = .165 [4.20] x No. of Spaces + .370 [9.398]

SPECIFICATIONS:

Material: Insulator color: White
 Insulator: Nylon 66, rated UL 94V-0
 Contacts: Brass

Plating: 30u" Gold over Nickel underplate overall

Electrical: Operating voltage: 250 VAC max
 Current rating: 9 Amps max

Insulation resistance: 1000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1500 VAC for 1 minute

Temperature Rating: Operating temperature: -40°C to +125°C

Environmental: Lead free, RoHS compliant.
 Recommended soldering temp: 260°C for 5 sec.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XXX ± .015
.XXX ± .015	Ø.XXX ± .010
APPROVALS	DATE
DRAWN AY	12/31/10
CHECKED JL	12/31/10
APPROVED	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: STRAIGHT HOUSING, MALE TERMINAL
 PCB MOUNT WITH PEGS, 30u" GOLD PLATED

SIZE	PART NO.	REV.
X	DMF-XX-S-P-G-30-V0	
REF:	S00016T	SCALE: NTS
		SHEET 1 OF 1