



## S-8 Double Contact Bayonet Base



| Part Number | Design Voltage | Amps | MSCP | Life Hours | Filament Type |
|-------------|----------------|------|------|------------|---------------|
| CM1228      | 32.0           | .45  | 15.0 | 150        | C-2V          |
| CM653       | 37.5           | .83  | 32.0 | 500        | C-2V          |
| CM895       | 40.0           | .53  | 14.0 | 3,800      | C-13          |
| CM1229      | 40.0           | .38  | 15.0 | 400        | C-2V          |
| CM110       | 44.0           | .17  | 6.0  | 200        | C-7A          |
| CM1676      | 45.5           | .22  | 7.6  | 1,000      | C-13          |


## S-8 Double Contact Index Base

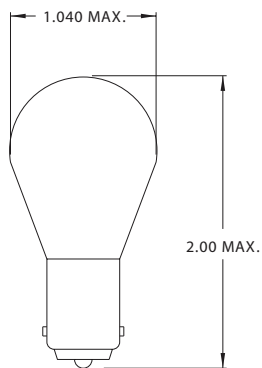

\* Dual Filament Lamp

| Part Number | Design Voltage | Amps | MSCP | Life Hours | Filament Type |
|-------------|----------------|------|------|------------|---------------|
| CM1154      | 6.4            | 2.63 | 21.0 | 200        | 2C-6*         |
|             | 7.0            | .75  | 3.0  | 1,000      | 2C-6*         |
| CM1606      | 6.4            | 2.69 | 21.0 | 200        | C-6           |
| CM1626      | 6.4            | 3.00 | 23.0 | 500        | C-2R          |
| CM198       | 12.8           | 2.25 | 32.0 | 1,200      | C-6*          |
|             | 14.0           | .68  | 3.0  | 5,000      | C-6*          |
| CM1016      | 12.8           | 1.34 | 21.0 | 200        | C-6*          |
|             | 14.0           | .59  | 6.0  | 1,000      | C-6*          |
| CM1034      | 12.8           | 1.80 | 32.0 | 200        | C-6*          |
|             | 14.0           | .59  | 3.0  | 5,000      | C-6*          |
| CM1035      | 12.8           | 1.44 | 21.0 | 1,000      | C-6*          |
|             | 14.0           | .59  | 3.0  | 5,000      | C-6*          |
| CM1157      | 12.8           | 2.10 | 32.0 | 600        | C-6*          |
|             | 14.0           | .59  | 3.0  | 5,000      | C-6*          |
| CM2057      | 12.8           | 2.10 | 32.0 | 1,200      | C-6*          |
|             | 14.0           | .48  | 2.0  | 5,000      | C-6*          |
| CM2357      | 12.8           | 2.23 | 40.0 | 400        | C-6*          |
|             | 14.0           | .59  | 3.0  | 500        | C-6*          |
| CM1662      | 28.0           | .93  | 32.0 | 400        | CC-6*         |
|             | 28.0           | .94  | 6.0  | 1,000      | C-2V*         |

## S-11 Single Contact Bayonet Base



| Part Number | Design Voltage | Amps | MSCP | Life Hours | Filament Type |
|-------------|----------------|------|------|------------|---------------|
| CM1723      | 6.2            | 4.50 | 32.0 | 400        | C-6           |
| CM309       | 28.0           | .90  | 32.0 | 300        | C-2V          |
| CM311       | 28.0           | 1.29 | 50.0 | 300        | C-2V          |
| CM3011      | 28.0           | 1.29 | 44.0 | 1,000      | C-2V          |