
PRODUCT SPECIFICATION

DATE：02/22/2011

cosmo ELECTRONICS CORPORATION	SOLID STATE RELAY - MOSFET OUTPUT KAQW412A	NO.61M21006 SHEET 1 OF 7	REV. 2


● OUTSIDE DIMENSION：

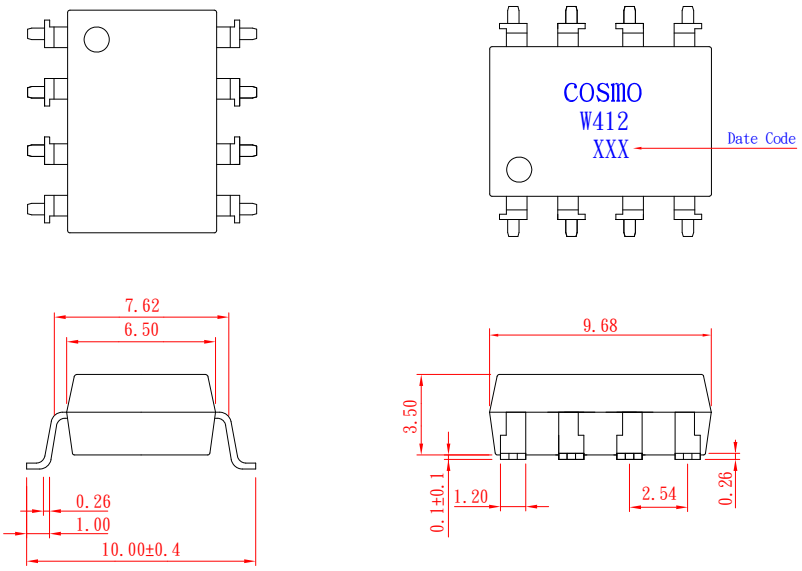


Unit：mm

Tolerance：±0.2mm

● Operate / Reverse time

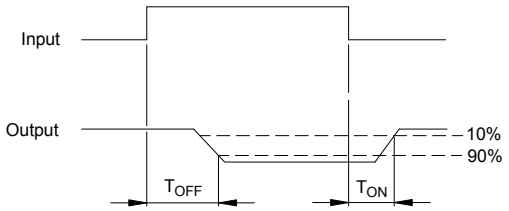

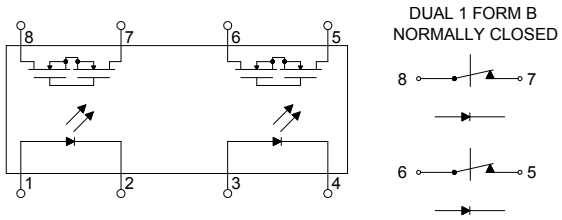

● Absolute Maximum Ratings

（Ta=25℃）

Emitter（Input）		Detector（Output）	
Reverse Voltage	5.0V	Output Breakdown Voltage	± 60V
Continuous Forward Current	50mA	Continuous Load Current	± 200mA
Peak Forward Current	1A	Power Dissipation	500mW
Power Dissipation	100mW		
Derate Linearly from 25℃	1.3mW/℃		
General Characteristics			
Isolation Test Voltage	5000VACrms	Storage Temperature Range	-40℃ to +125℃
Isolation Resistance Viso=500V，Ta=25℃	≧10^{10}Ω	Operating Temperature Range	-40℃ to +85℃
		Junction Temperature	100℃
Total Power Dissipation	550mW	Soldering Temperature， 2mm from case，10 sec	260℃
Derate Linearly from 25℃	2.5mW/℃		

PRODUCT SPECIFICATION

DATE：02/22/2011




cosmo ELECTRONICS CORPORATION	SOLID STATE RELAY - MOSFET OUTPUT **KAQW412A**	NO.61M21006	REV. 2
		SHEET 2 OF 7	

● Electro-optical Characteristics

（Ta=25℃）

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit.
Emitter（Input）						
Forward Voltage	V_F	I_F=10mA		1.2	1.5	V
Operation Input Current	IF_{OFF}	V_L=±20V，I_L≦5μA			5	mA
Recovery Input Current	IF_{ON}	V_L=±20V，I_L=100mA，t=10mS	0.2			mA
Detector（Output）						
Output Breakdown Voltage	V_B	I_B=50μA，I_F=10mA	60			V
Output Off-State Leakage	IT_{OFF}	V_T=60V，I_F=10mA		0.2	2	μA
I/O Capacitance	C_{ISO}	I_F=0，f=1MHz		6		pF
ON Resistance	R_{ON}	I_L=100mA，I_F=0mA		2.5	5	Ω
Operate Time	T_{OFF}	I_F=10mA，V_L=±20V t=10ms，I_L=±100mA		0.6	1.5	ms
Reverse Time	T_{ON}			0.3	1.5	ms

● MOS Relay Schematic and Wiring Diagrams

Schematic	Output configuration	Load	Connection	Wiring Diagrams
	2b	AC/DC	-	(1)Two independent 1 Form B use  (2) 2 Form B use 


PRODUCT SPECIFICATION

DATE：02/22/2011


cosmo ELECTRONICS CORPORATION	SOLID STATE RELAY - MOSFET OUTPUT KAQW412A	NO.61M21006	REV. 2
		SHEET 3 OF 7	

● Data Curve


Load current vs. ambient temperature
Allowable ambient temperature：
-40℃ to +85℃

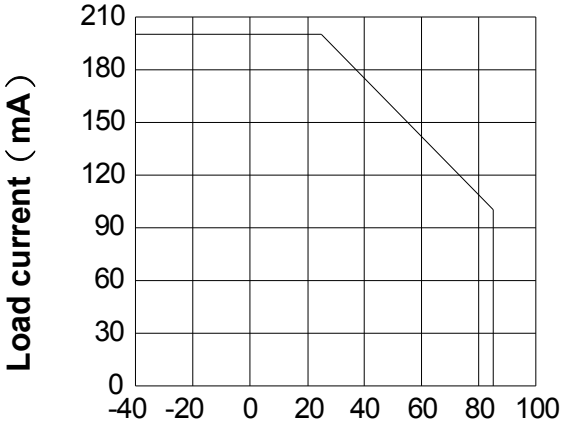


On resistance vs. ambient temperature across terminals 5，7 and 6，8 pin
LED current：5mA
Continuous load current：200mA（DC）

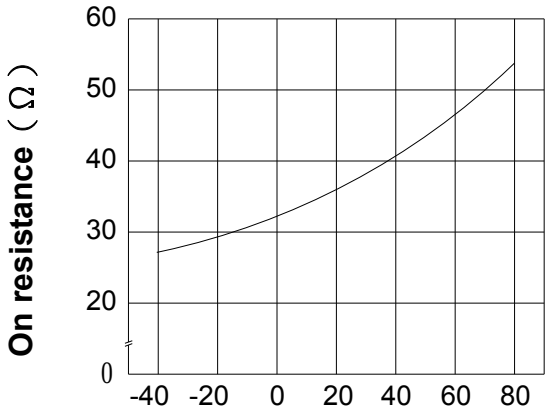

Operate (OFF) time vs. ambient temperature
Load voltage 60V（DC）
LED current：5mA
Continuous load current：200mA（DC）

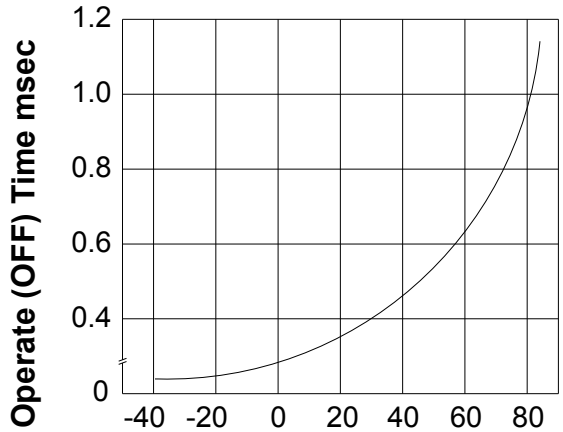

Reverse (ON) time vs. ambient temperature
Load voltage 60V（DC）
LED current：5mA
Continuous load current：200mA（DC）

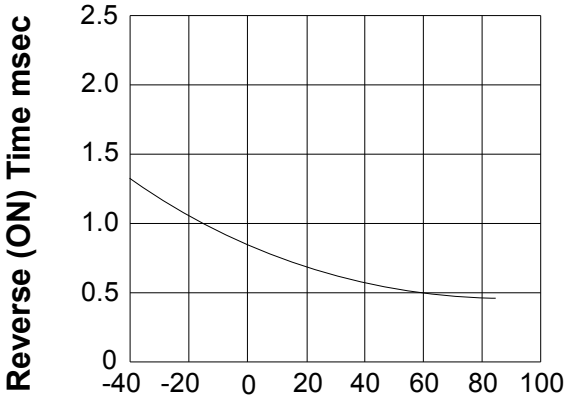


PRODUCT SPECIFICATION


DATE：02/22/2011

cosmo ELECTRONICS CORPORATION	SOLID STATE RELAY - MOSFET OUTPUT KAQW412A	NO.61M21006	REV. 2
		SHEET 4 OF 7	


LED operate (OFF) current vs. ambient temperature
Load Voltage：60V（DC）
Continuous load current：200mA（DC）

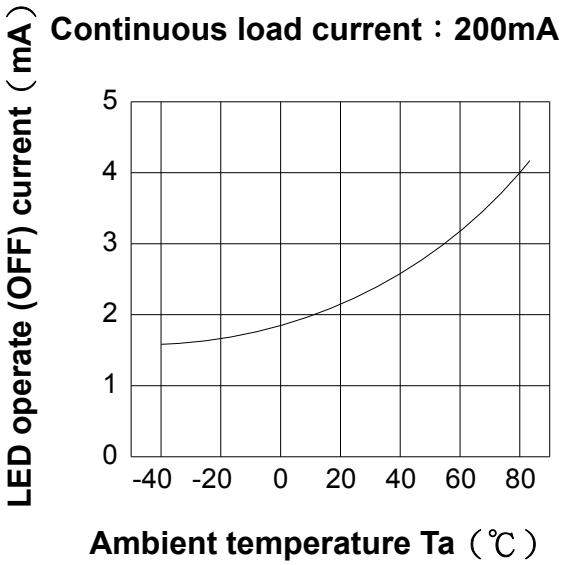


LED Reverse (ON) current vs. ambient temperature
Load Voltage：60V（DC）
Continuous load current：200mA（DC）

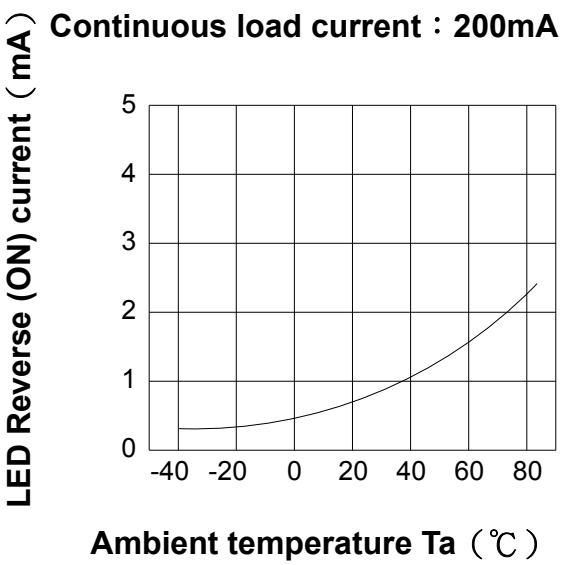

LED dropout voltage vs. ambient temperature
LED current：5 to 50mA

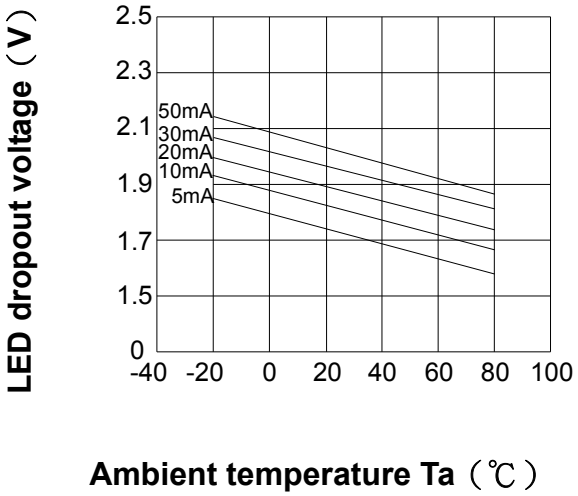

Voltage vs. current characteristics of output at MOSFET portion
Measured portion：across terminals 5，7 and 6，8 pin
Ambient temperature：25℃

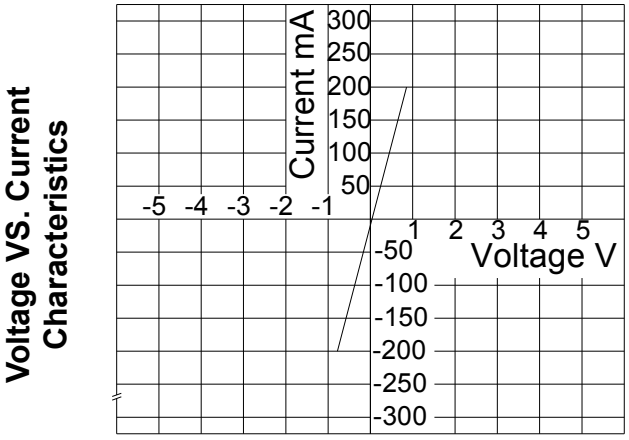


PRODUCT SPECIFICATION


DATE：02/22/2011

cosmo ELECTRONICS CORPORATION	SOLID STATE RELAY - MOSFET OUTPUT KAQW412A	NO.61M21006	REV. 2
		SHEET 5 OF 7	


LED forward current vs. Operate (OFF) time across terminals 5，7 and 6，8 pin
Load voltage：60V（DC）
Continuous load current：200mA（DC）
Ambient temperature：25℃

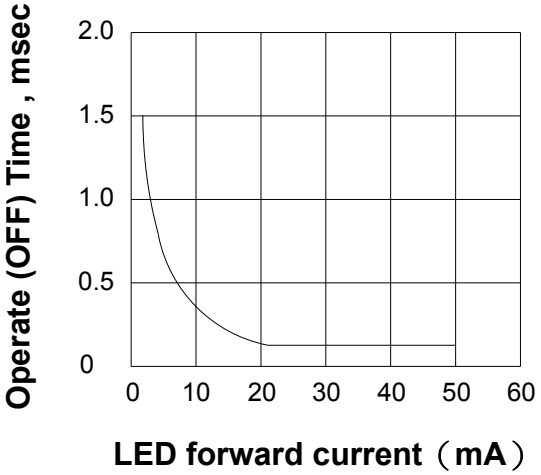


Off state leakage current
Across terminals 5，7 and 6，8 pin
Ambient temperature：25℃

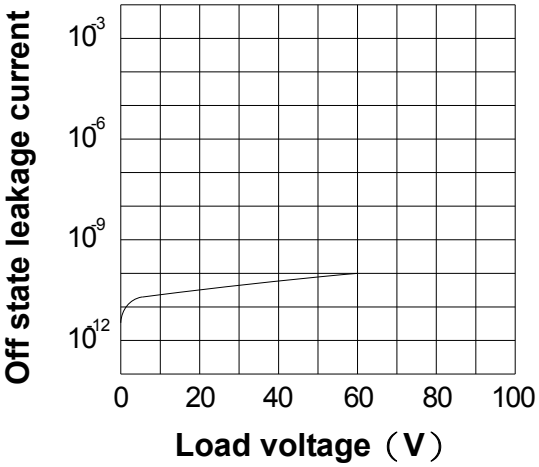

LED forward current vs. Reverse (ON) time
Across terminals 5，7 and 6，8 pin
Load voltage：60V（DC）
Continuous load current：200mA（DC）
Ambient temperature：25℃

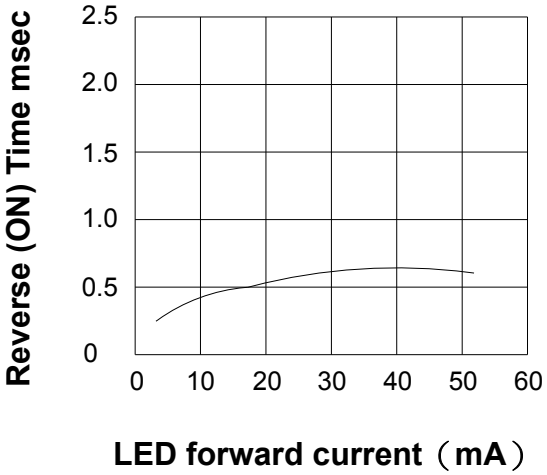

Applied voltage vs. output capacitance
Across terminals 5，7 and 6，8 pin
Frequency：1MHz
Ambient temperature：25℃

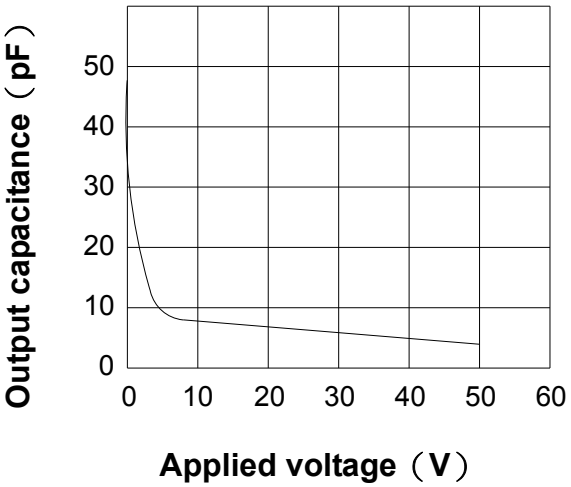

PRODUCT SPECIFICATION


DATE：02/22/2011

cosmo ELECTRONICS CORPORATION	SOLID STATE RELAY - MOSFET OUTPUT KAQW412A	NO.61M21006	REV. 2
		SHEET 6 OF 7	

● USING METHODS


Examples of resistance value to control LED forward current（IF）

SSR-MOSFET OUTPUT **（IF=5mA）**

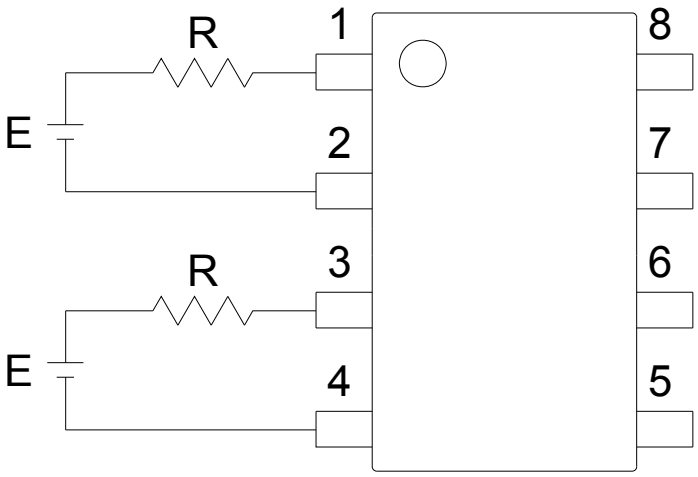

E	R
3.3V	Approx. 330 Ω
5V	Approx. 640 Ω
12V	Approx. 1.9K Ω
15V	Approx. 2.5K Ω
24V	Approx. 4.1K Ω

（1） LED forward current must be more than 5mA，at E min.
（2） LED forward current must be less than 50mA，at E max.

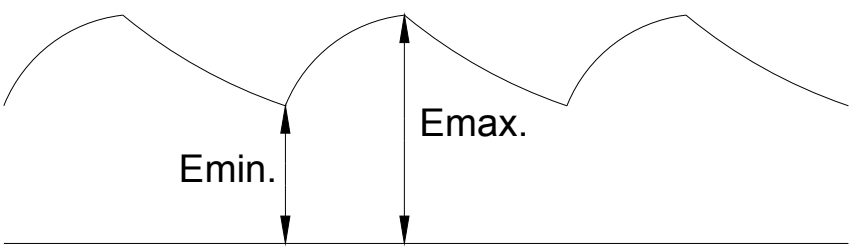


PRODUCT SPECIFICATION


DATE：02/22/2011

cosmo ELECTRONICS CORPORATION	SOLID STATE RELAY - MOSFET OUTPUT KAQW412A	NO.61M21006	REV. 2
		SHEET 7 OF 7	

● USING METHODS

Regulate the spike voltage generated on the inductive load as follows：

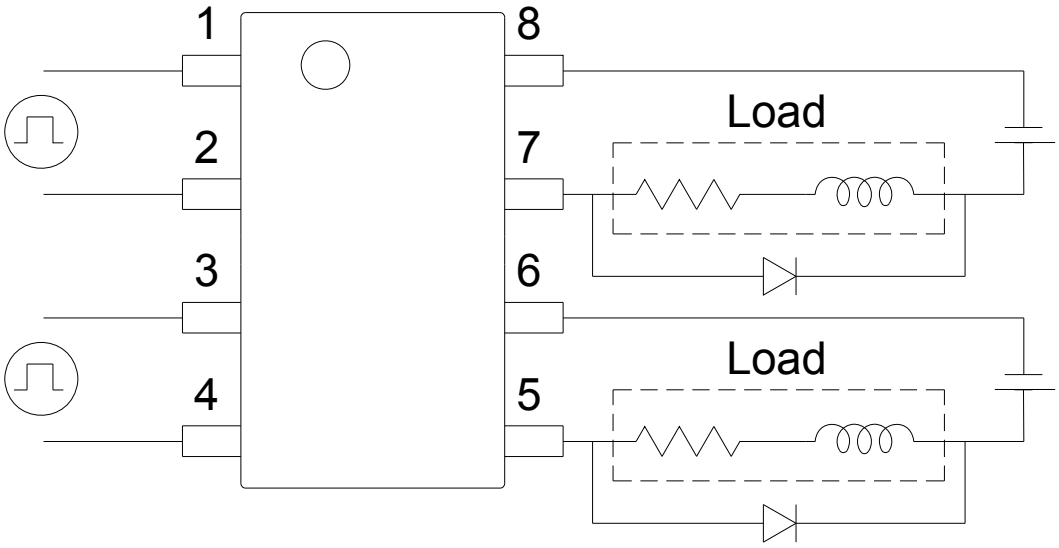

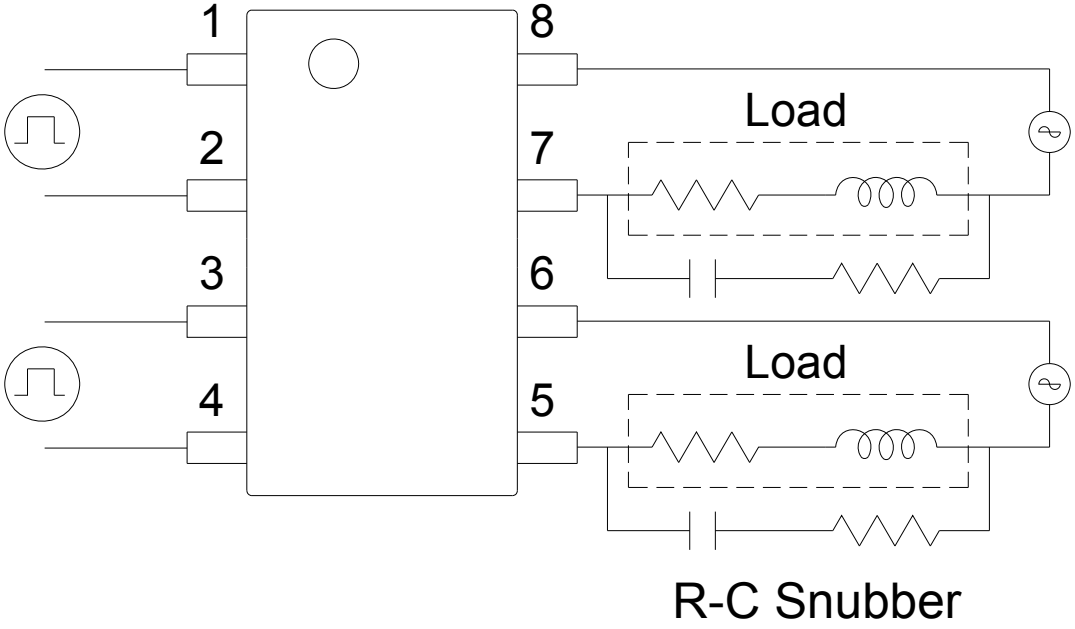

R-C Snubber