
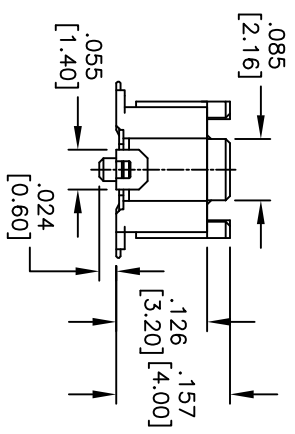
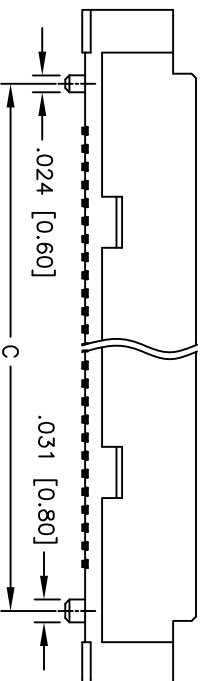
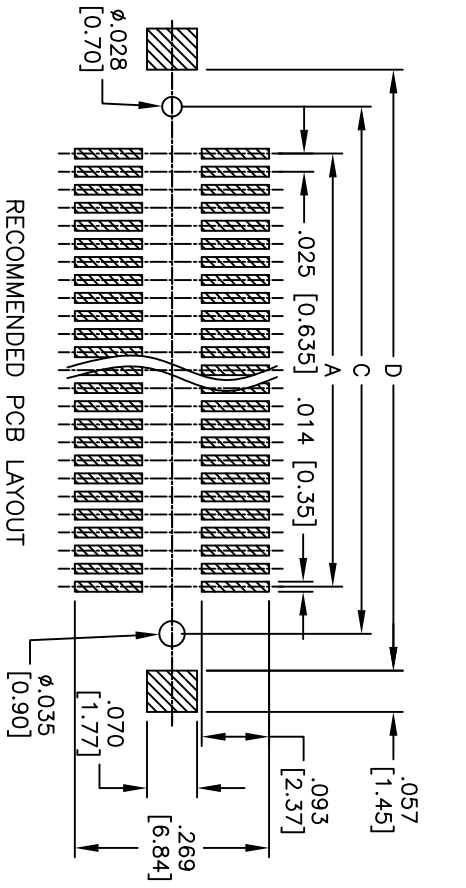


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/08/10	

APPROVED: _____
 DATE: _____ TITLE: _____

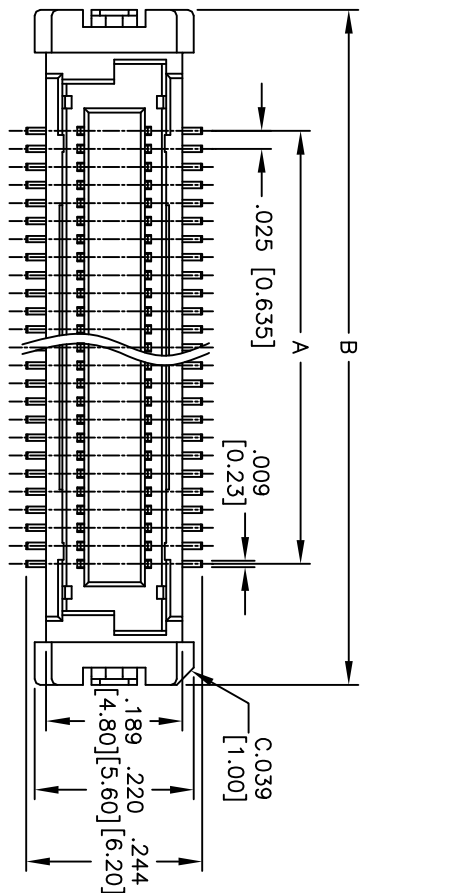

PACKAGED ON TAPE & REEL

Positions: 20, 30, 40, 50
 A = .025 [0.635] x (No. of Contacts per row - 1) + .335 [8.50]
 B = .025 [0.635] x (No. of Contacts per row - 1) + .130 [3.31]
 C = .025 [0.635] x (No. of Contacts per row - 1) + .233 [5.91]
 D = .025 [0.635] x (No. of Contacts per row - 1) + .233 [5.91]

SPECIFICATIONS:
 Material: Insulator: Hi-temp thermoplastic, rated UL 94V-0
 Insulator color: Natural
 Contacts: Copper Alloy
 Hold down: Copper Alloy
 Plating: Gold flash over Nickel underplate overall.
 Electrical: Operating voltage: 100 VAC max
 Current rating: 0.5A per contact
 Contact resistance: 40 mohms max. initial
 Insulation resistance: 1000 Mohms min
 Environmental: Lead free, RoHS compliant
 Recommended soldering temp: 260°C for 5 seconds

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .025 [0.635] BOARD TO BOARD SOCKET,
 SMT TYPE, 4.00 HEIGHT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLE SIZES	INCHES	HOLE SIZES	DATE
.X ± .10	ØXX	± .10	
.XX ± .020	ØXXX	± .015	
.XXX ± .015	ØXXXX	± .010	
APPROVALS	DATE		
DRAWN	DRY	12/08/10	
CHECKED			
APPROVED			

RECOMMENDED SOLDERING TEMP: 260°C FOR 5 SECONDS

