ADELS contact

Screwless Connectors
Block Connectors

930-00/12

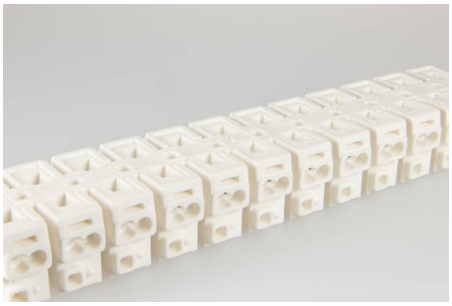

Terminal Block without Release Keyn, 12 pole, Voltage Rating: 450 V, Current Rating: 24 A, Cross-Section: 2.5 mm²

Order Info

Reference Number (ref. no.)	112012
Applications	Lighting, Electrical Appliances
PU	40
EAN	4028012104246

Type

Type	Terminal Block without Release Keyn
Number of poles	12 pole
Clamping Units per Pole	2
Colour	white
Cross-Section	2.5 mm²
Connection Type	screwless

Technical Data

Voltage Rating	450 V
Current Rating	24 A
Insulating Material	PA 6.6
Contact Material	Brass
Flammability Rating	V-2
max. Ambient Temperature Operation	85 °C
Stripping Length	8.0-9.0 mm
Internal Core Cross-Section max.	2.5 mm²
External Core Cross-Section min.	0.5 mm²
External Core Cross-Section max.	2.5 mm²
Internal Core Cross-Section min.	0.5 mm²
Type of Conductor Solid External	yes
Type of Conductor Solid Internal	yes
Approbation EN60998	930_935_937_EN60998_20071001_VDE_40022275_web.pdf
Approbation UL	930_935_19880415_19941222_UL_E63492_1-06_Description_web.
Approbation CSA	Schraub_Steck_Schraubenlos_SI_Klemmen_20160429_CSA_700765