

SHEET 1 OF 1




CIRCUIT: SPDT
CONTACT CONFIGURATION

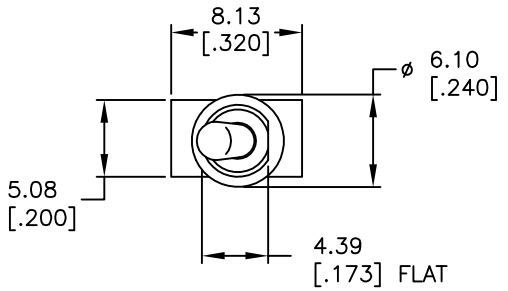


▲

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
(ON)	OFF	(ON)
2-3	OPEN	2-1

(ON) = MOMENTARY

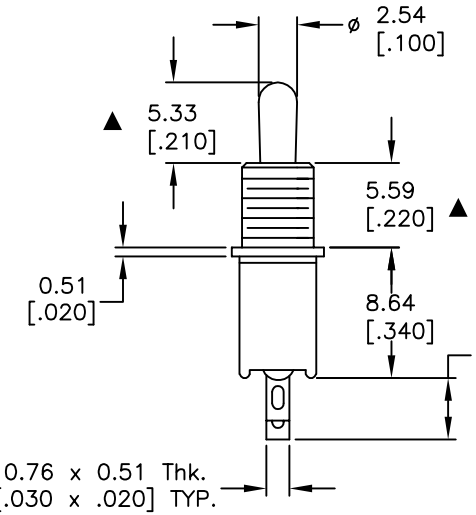

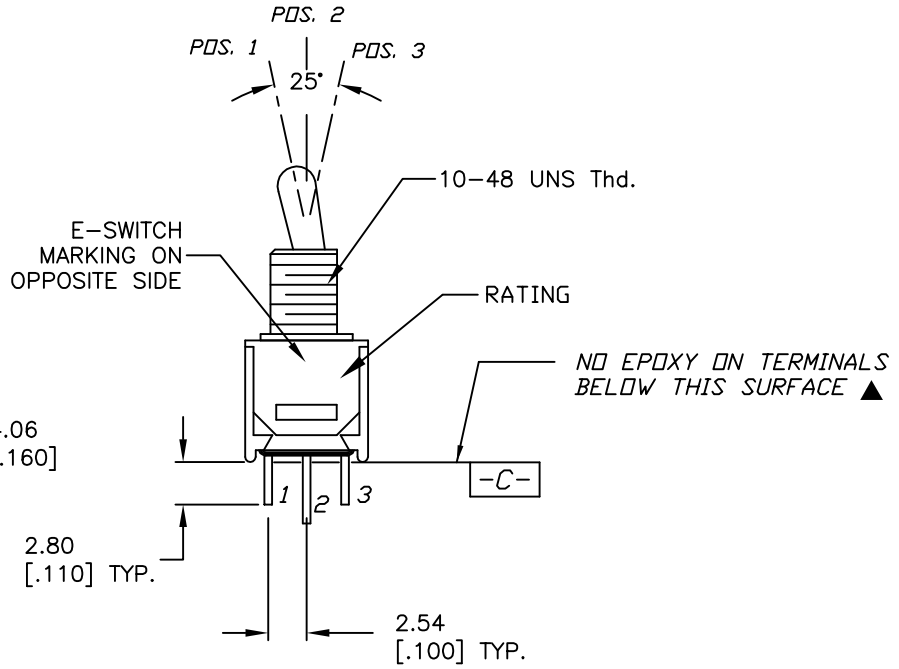

NOTES:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERM. NO'S. FOR REF. ONLY
4. CONTACT RATING: 3A @120 VAC OR 28VDC, 1A @250VAC
5. ELECTRIC LIFE: 30,000 make-and-break cycles at full load.
6. INSULATION RESISTANCE: 1,000 M ohm min.
7. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
8. OPERATING TEMP.: -30°C to 85°C
9. ▲ DENOTES CRITICAL PARAMETER.
10. 2002/95/EC (ROHS) COMPLIANT

REV.	PCR No.	DESCRIPTION	DATE	CHKD
B	19387	TERMINALS DRAWN AS M1, UPDATES	10/27/10	BLR
A	13118	RELEASED FOR PRODUCTION	5/8/03	AR

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E•SWITCH® | LAMB™ INDUSTRIES

TITLE: 200MSP4T2B1M1QE

SCALE	DATE	DR	DWG	REV
2:1	5/8/03	AR	T221002	B