

6

5

4

3


2

1

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/30/10	

APPROVED: _____

DATE: _____ TITLE: _____

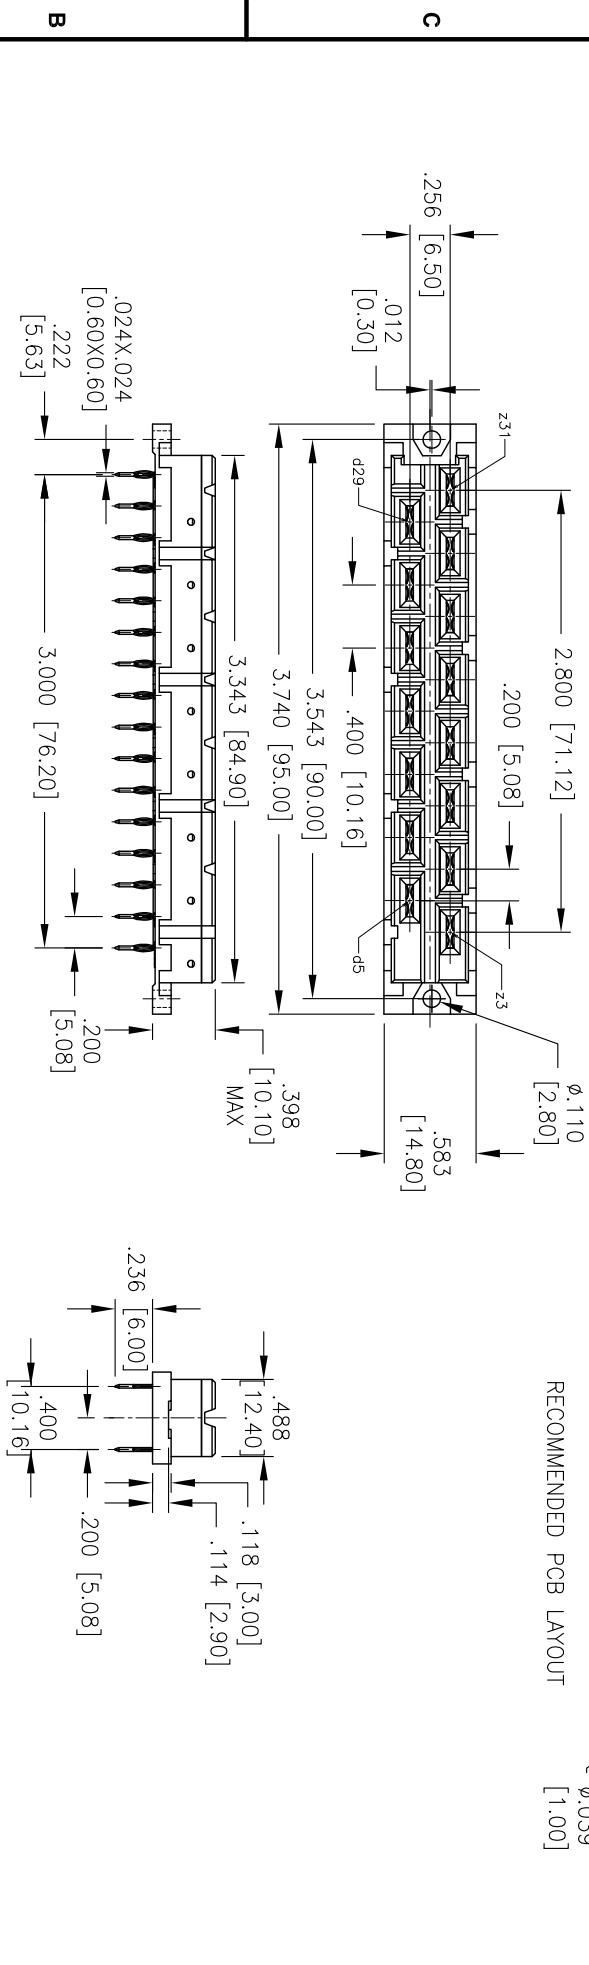

SPECIFICATIONS:

Material:
 Insulator: PBT, glass reinforced, rated UL 94V-0
 Contacts: Phosphor Bronze
Plating:
 Silver over Nickel underplate overall

Electrical:
 Current rating: 15 Amps max
 Contact resistance: 8 mohms max @ DC 100mA
 Insulation resistance: 1000 Mohms min@ DC 500V
 Dielectric withstanding voltage: 3100 VAC for 1 minute
Temperature Rating:
 Operating temperature: -55°C to +105°C

Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 235°C for 5 sec.



ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

DIN TYPE H15 FEMALE, 15 PINS
PRESS FIT TAILS

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED INCHES		HOLE SIZES		DATE	
X	± .10	ØXX	± .015		
.XX	± .020	ØXXX	± .010		
.XXX	± .015				
APPROVALS					
DRAWN	AY			12/30/10	
CHECKED	JL			12/30/10	
APPROVED					
TITLE		SIZE	PART NO.	SCALE	SHEET 1 OF 1
DIN TYPE H15 FEMALE, 15 PINS PRESS FIT TAILS		X	DIN-P-15FS-122-B-3-AG-PF	NTS	
REF: S00098T					

6

5

4

3

2

1