

# B24

## FEMALE HEADER PROFILE : 5.0mm DUAL-ENTRY TYPE

PITCH: 2.54mm

### SPECIFICATIONS

#### Material

Insulator : PBT, glass reinforced, rated UL 94V-0

Contact : Phosphor Bronze

#### Electrical

Current Rating : 1 Amp DC



Contact Resistance : 30 mΩ max.

Insulation Resistance : 3000 MΩ min.



Dielectric Withstanding Voltage : 500V AC for 1minute

Operating Temperature : -40°C to +105°C

• Mating Suggestion : C15, C16 & C19 series.

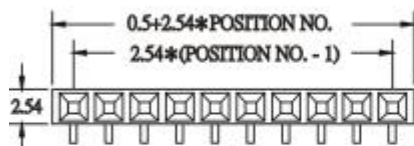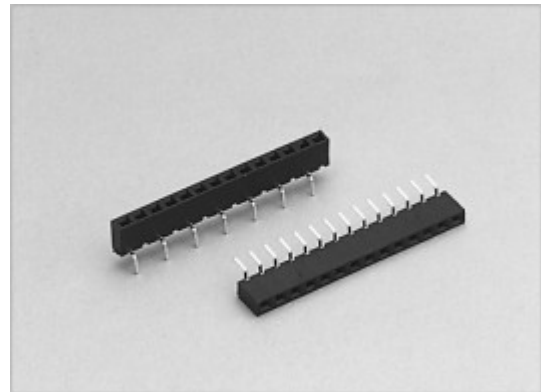



(TYPE A)

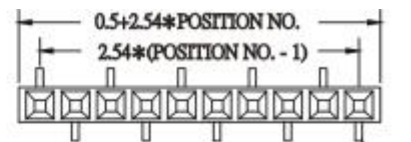

(TYPE B1)



(TYPE B2)

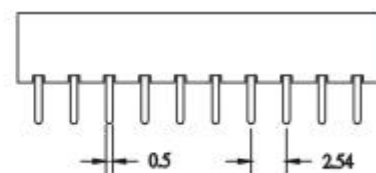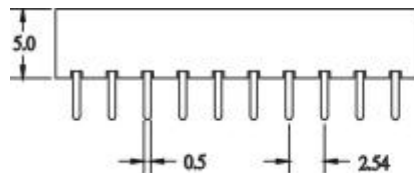

### HOW TO ORDER:

B24 -  1 -  2 -  3 -  4 -  5

1.NO. OF CONTACT	2.CONTACT MATERIAL	3.CONTACT PLATING	4.FOOT RANK TYPE	5.INSULATOR COLOR
SINGLE ROW 1 *2 - 1 *40	B: PHOSPHOR BRONZE	T: TIN PLATED S: SELECTIVE G: GOLD FLASH A: 5μ" INCH GOLD B: 10μ" INCH GOLD C: 15μ" INCH GOLD D: 30μ" INCH GOLD	A: TYPE A B: TYPE B1 C: TYPE B2	1. BLACK