

**SURFACE MOUNT T1 CARRIER
INTERFACE TRANSFORMERS**
T1/CEPT Telecom Line Interface Applications

TM0008

Bel offers a new cost effective package on our standard T1/CEPT Telecom Interface Line Transformers. This sixteen lead, "Topper™", surface mount package, provides a superior, cost effective, quality product.

- * High Pot 2000 Vrms measured for one minute.
- * Primary Inductance (OCL) is 1.20 Milihenries minimum.
- * Primary DCR is 0.80 ohms maximum.

ELECTRICALS @ 25° C


Part Number	Turns Ratio T1/T2	Leakage Inductance L_L (μ H) Max	DCR (ohms) Max	Coupling Capacitance (pF) Max	Schematic
S553-0013-04	1:1.7/1:2CT	0.50/0.80	0.80/1.80	35	A
S553-0013-05	1:1/1:1.25/1:2CT	0.50/0.50/0.80	0.80/1.10/1.80	50	B

* Coupling Capacitance (C_{ww}) is 35 PicoFarads maximum.

* Custom designs available.

Turns ratio of S553-0013-05 ia (1-2):(16-14)/(1-3):(16-14)/(5-8):(9-11)

SCHEMATICS

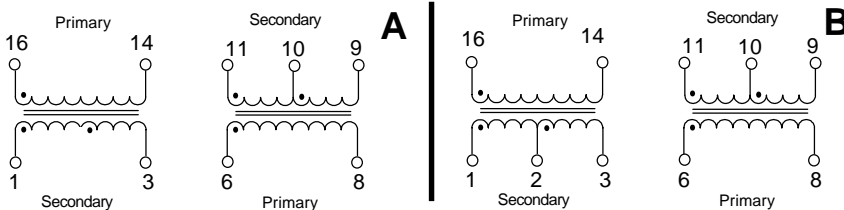


The Bel Surface Mount "Topper™" package offers an industry standard package size and pin-out at an aggressive price.

Dimensions are in inches(mm).
Dimension Tolerance is +/- 0.02(0.51) unless otherwise specified.

MECHANICALS

Package Style SMT

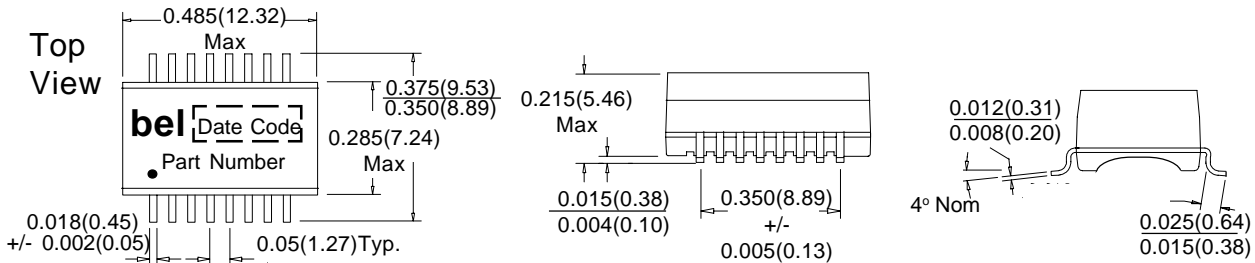

Corporate Office
Bel Fuse Inc.
198 Van Vorst Street, Jersey City, NJ 07302-4496
Tel: 201-432-0463
Fax: 201-432-9542
E-Mail: BelFuse@belfuse.com
Internet: http://www.belfuse.com

Far East Office
Bel Fuse Ltd.
8F/8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel: 852-2328-5515
Fax: 852-2352-3706

European Office
Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Preston PR1 8UD
Lancashire, U.K.
Tel: 44-1772-556601
Fax: 44-1772-888366