



MAHE0.5A~MAHE0.5M

Surface Mount Ultra Fast Rectifiers

Features

- Low profile package
- Ideal for automated placement
- Glass passivated chip junctions
- Ultrafast reverse recovery time
- Low switching losses, high efficiency
- High forward surge capability
- High temperature soldering:
260°C/10 seconds at terminals
- Component in accordance to
RoHS 2002/95/1 and WEEE 2002/96/EC



Mechanical Data

- **Case:** JEDEC MSMA molded plastic body over glass passivated chip
- **Terminals:** Solder plated, solderable per J-STD-002B and JESD22-B102D
- **Polarity:** Laser band denotes cathode end

Major Ratings and Characteristics

$I_{F(AV)}$	0.5 A
V_{RRM}	50 V to 1000 V
I_{FSM}	15 A
t_{rr}	50nS, 75nS
V_F	1.0 V, 1.3 V, 1.7 V
$T_j \text{ max.}$	150 °C

Maximum Ratings & Thermal Characteristics

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Items	Symbol	MAHE 0.5A	MAHE 0.5B	MAHE 0.5D	MAHE 0.5G	MAHE 0.5J	MAHE 0.5K	MAHE 0.5M	UNIT
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum average forward rectified current	$I_{F(AV)}$	0.5							A
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load	I_{FSM}	15							A
Thermal resistance from junction to lead ⁽¹⁾	$R_{\theta JL}$	35							°C/W
Operating junction and storage temperature range	T_J, T_{STG}	-55 to +150							°C

Note 1: Mounted on P.C.B. with 0.2 x 0.2" (5.0 x 5.0mm) copper pad areas.

Electrical Characteristics

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Items	Test conditions	Symbol	MAHE0.5A~MAHE0.5D	MAHE0.5G	MAHE0.5J~MAHE0.5M	UNIT
Instantaneous forward voltage	$I_F = 0.5A^{(2)}$	V_F	1.0	1.3	1.7	V
Reverse current	$V_R = V_{DC}$ $T_J = 25^\circ\text{C}$ $T_J = 125^\circ\text{C}$	I_R	5 100			μA
Reverse recovery time	$I_F = 0.5\text{ A}$, $I_R = 1.0\text{ A}$, $I_{rr} = 0.25\text{ A}$	t_{rr}	50 75			nS
Typical junction capacitance	4.0V, 1.0MHz	C_J	11 8			pF

Note 2: Pulse test: 300μs pulse width, 1% duty cycle.



MAHE0.5A~MAHE0.5M

Surface Mount Ultra Fast Rectifiers

Characteristic Curves ($T_A=25^\circ\text{C}$ unless otherwise noted)

Fig.1 Forward Current Derating Curve

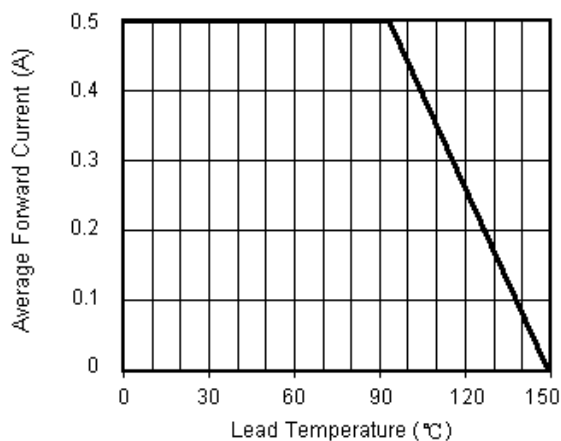


Fig.2 Maximum Non-Repetitive Peak Forward Surge Current

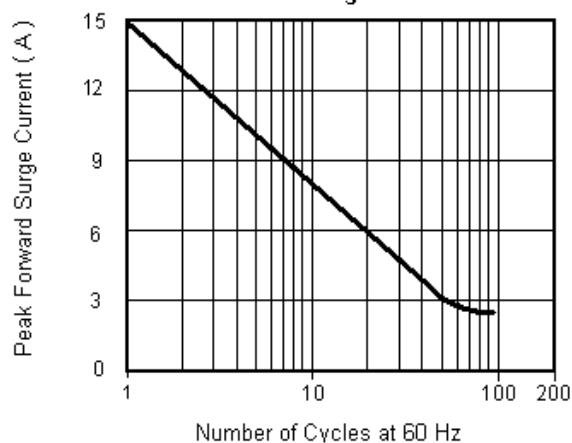


Fig.3 Typical Instantaneous Forward Characteristics


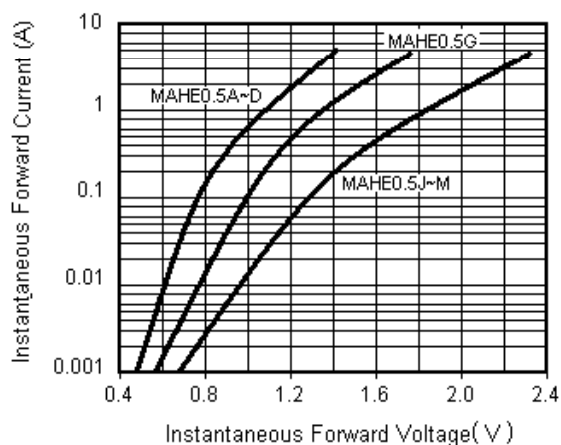


Fig.4 Typical Reverse Leakage Characteristics




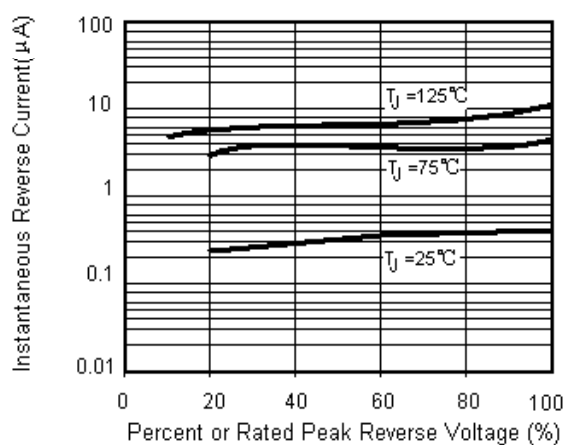

MAHE0.5A~MAHE0.5M

Surface Mount Ultra Fast Rectifiers

Package Outline

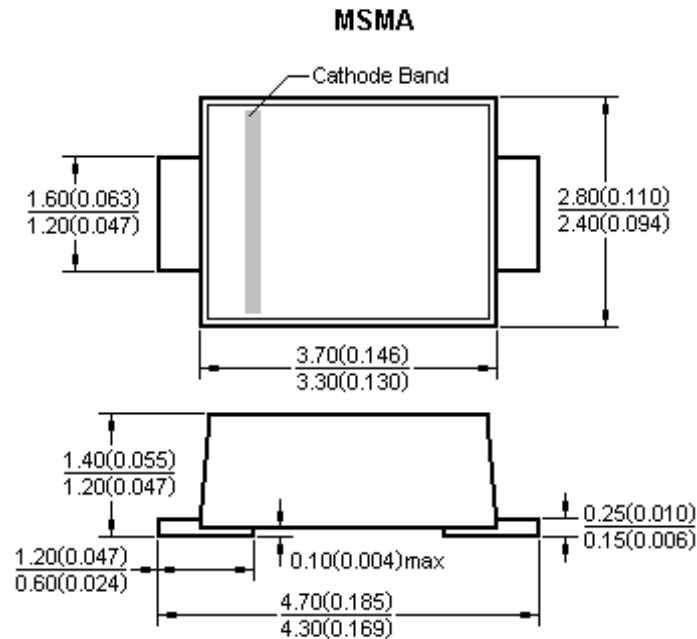

Dimensions in millimeters and (inches)

Notice

- Product is intended for use in general electronics applications.
- Product should be worked less than the ratings; if exceeded, may cause permanent damage or introduce latent failure mechanisms.
- The absolute maximum ratings are rated values and must not be exceeded during operation. The following are the general derating methods you design a circuit with a device.
 - $I_{F(AV)}$: We recommend that the worst case current be no greater than 80%.
 - I_{FSM} : This rating specifies the non-repetitive peak current. This is only applied for an abnormal operation, which the general during the lifespan of the device.
 - T_J : Derate this rating when using a device in order to ensure high reliability. We recommend that the device be used at a T_J of below 125°C.

- TRR is registered trademark of Rising-sun Technology. Rising-sun Technology reserves the right to make changes to any product in this specification to improve reliability, functional characteristics, or design without notice.
- Rising-sun Technology does not assure any liability arising out of the applications or any product described in this specification.
- Rising-sun Technology advises customers to obtain the latest version of the device information before placing orders to verify that the required information is current.

