PRODUCT FEATURES

☐ IGBT CHIP(T4 Fast Trench+Field Stop technology)

☐ Low switching losses

☐ Low saturation voltage and positive temperature coefficient

☐ Fast switching and short tail current

☐ Free wheeling diodes with fast and soft reverse recovery

☐ Popular SOT-227 Package




APPLICATIONS

☐ High frequency switching application

☐ Medical applications

☐ Motion/servo control

☐ UPS systems



IGBT

ABSOLUTE MAXIMUM RATINGS(T_C=25°C unless otherwise specified)

Symbol	Parameter/Test Conditions		Values	Unit
V_{CES}	Collector Emitter Voltage	T_J=25℃	1200	V
V_{GES}	Gate Emitter Voltage		±20	
I_C	DC Collector Current	T_C=25℃,T_{Jmax}=175℃	150	A
		T_C=95℃,T_{Jmax}=175℃	100	
I_{CM}	Repetitive Peak Collector Current	tp=1ms	200	
P_{tot}	Power Dissipation Per IGBT	T_C=25℃,T_{Jmax}=175℃	550	W

Diode

ABSOLUTE MAXIMUM RATINGS (T_C=25°C unless otherwise specified)

Symbol	Parameter/Test Conditions		Values	Unit
V_{RRM}	Repetitive Reverse Voltage	T_J=25℃	1200	V
$I_{F(AV)}$	Average Forward Current		100	A
I_{FRM}	Repetitive Peak Forward Current	tp=1ms	200	
I^2t		T_J=125℃, t=10ms, V_R=0V	1850	A^2S

Download from alldatasheet.com

IGBT

ELECTRICAL CHARACTERISTICS *(T_C=25°C unless otherwise specified)*

Symbol	Parameter/Test Conditions			Min.	Typ.	Max.	Unit
$V_{GE(th)}$	Gate Emitter Threshold Voltage	$V_{CE}=V_{GE}$, I_C=4.0mA		5.4	6.0	6.5	V
$V_{CE(sat)}$	Collector Emitter Saturation Voltage	I_C=100A, V_{GE}=15V, T_J=25℃			2.1	2.5	
		I_C=100A, V_{GE}=15V, T_J=125℃			2.5		
I_{CES}	Collector Leakage Current	V_{CE}=1200V, V_{GE}=0V, T_J=25℃				1	mA
		V_{CE}=1200V, V_{GE}=0V, T_J=125℃				10	mA
I_{GES}	Gate Leakage Current	V_{CE}=0V,V_{GE}=±15V, T_J=25℃		-400		400	nA
R_{gint}	Integrated Gate Resistor				7.5		Ω
Q_g	Gate Charge	V_{CE}=600V, I_C=100A , V_{GE}=15V			0.47		μC
C_{ies}	Input Capacitance	V_{CE}=25V, V_{GE}=0V, f =1MHz			6.2		nF
C_{res}	Reverse Transfer Capacitance				0.35		nF
$t_{d(on)}$	Turn on Delay Time	V_{CC}=600V,I_C=100A R_G =7.5Ω, V_{GE}=±15V, Inductive Load	T_J=25℃		150		ns
			T_J=125℃		160		ns
			T_J=150℃		170		ns
t_r	Rise Time		T_J=25℃		65		ns
			T_J=125℃		70		ns
			T_J=150℃		75		ns
$t_{d(off)}$	Turn off Delay Time	V_{CC}=600V,I_C=100A R_G =7.5Ω, V_{GE}=±15V, Inductive Load	T_J=25℃		400		ns
			T_J=125℃		450		ns
			T_J=150℃		480		ns
t_f	Fall Time		T_J=25℃		40		ns
			T_J=125℃		60		ns
			T_J=150℃		70		ns
E_{on}	Turn on Energy	V_{CC}=600V,I_C=100A R_G =7.5Ω, V_{GE}=±15V, Inductive Load	T_J=125℃		11.5		mJ
			T_J=150℃		12.5		mJ
E_{off}	Turn off Energy		T_J=125℃		5.5		mJ
			T_J=150℃		6.0		mJ
I_{SC}	Short Circuit Current	tpsc≤10μS , V_{GE}=15V T_J=125°C,V_{CC}=600V			400		A
R_{thJC}	Junction to Case Thermal Resistance （Per IGBT）					0.27	K /W

Diode

ELECTRICAL CHARACTERISTICS *(T_C=25°C unless otherwise specified)*

Symbol	Parameter/Test Conditions		Min.	Typ.	Max.	Unit
V_F	Forward Voltage	I_F=100A , V_{GE}=0V, T_J=25℃		1.65	2.15	V
		I_F=100A , V_{GE}=0V, T_J=125℃		1.65		
t_{rr}	Reverse Recovery Time	I_F=100A , V_R=600V dI_F/dt=-1500A/μs T_J =125℃		480		ns
I_{RRM}	Max. Reverse Recovery Current			85		A
Q_{RR}	Reverse Recovery Charge			19.4		μC
E_{rec}	Reverse Recovery Energy			7.6		mJ
R_{thJCD}	Junction to Case Thermal Resistance （Per Diode）				0.5	K /W

Download from alldatasheet.com

MODULE CHARACTERISTICS *(T_C=25°C unless otherwise specified)*

Symbol	Parameter/Test Conditions		Values	Unit
T_{Jmax}	Max. Junction Temperature		175	℃
T_{Jop}	Operating Temperature		-40~150	
T_{stg}	Storage Temperature		-40~125	
V_{isol}	Isolation Breakdown Voltage	AC, 50Hz(R.M.S), t=1minute	3000	V
Torque	to heatsink	Recommended（M4）	0.7~1.1	Nm
	to terminal	Recommended（M4）	0.7~1.1	Nm
Weight			26.5	g

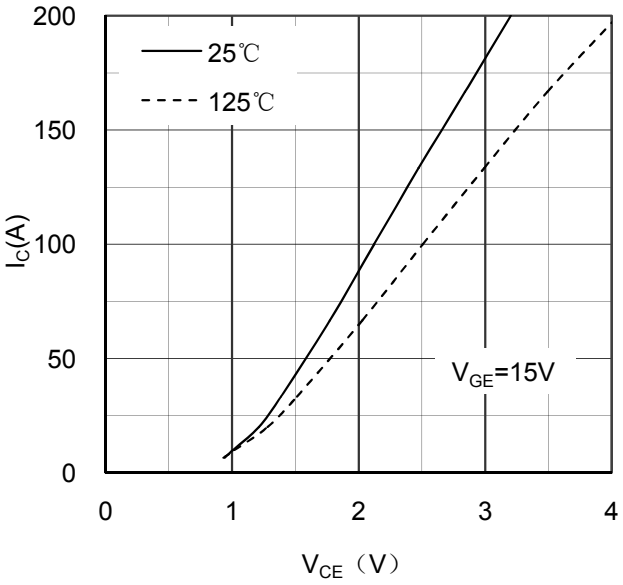


Figure 1. Typical Output Characteristics IGBT

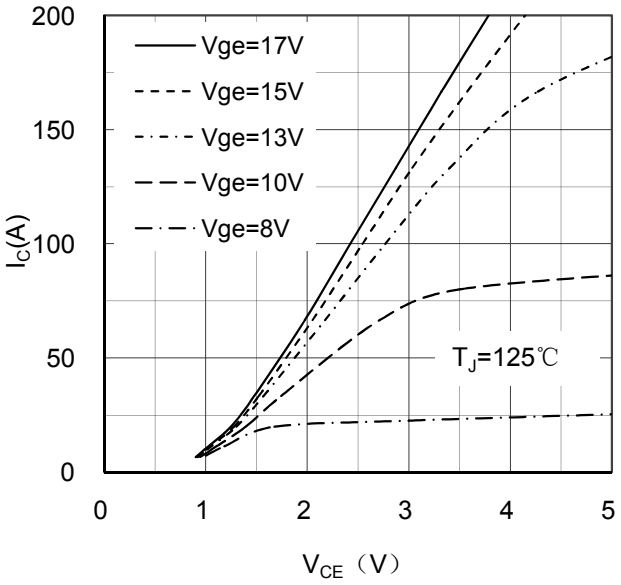


Figure 2. Typical Output Characteristics IGBT

Download from alldatasheet.com

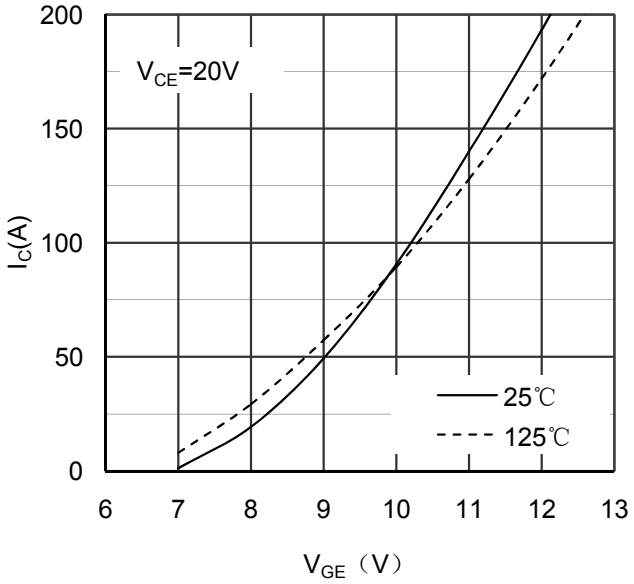


Figure 3. Typical Transfer characteristics IGBT

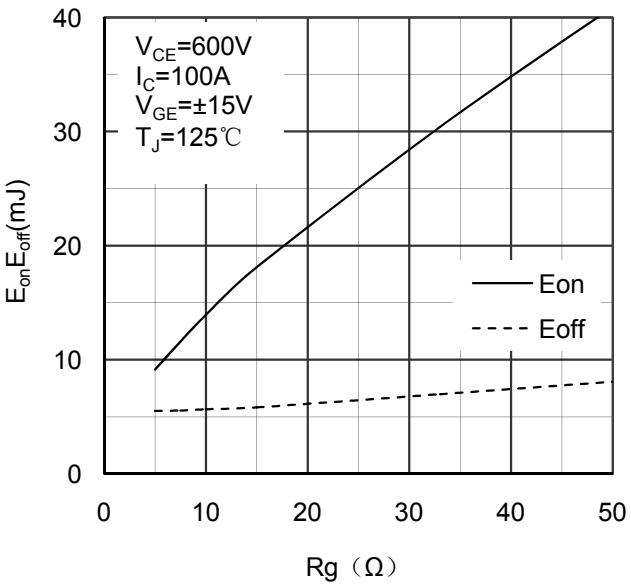


Figure 4. Switching Energy vs Gate Resistor IGBT

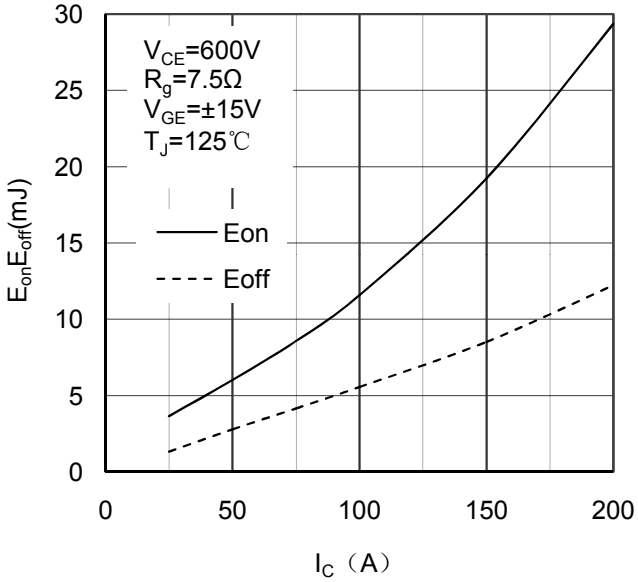


Figure 5. Switching Energy vs Collector Current IGBT

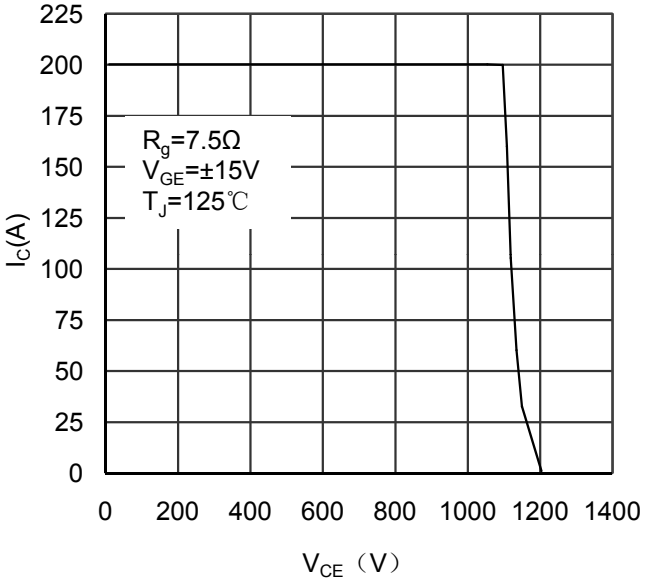


Figure 6. Reverse Biased Safe Operating Area IGBT

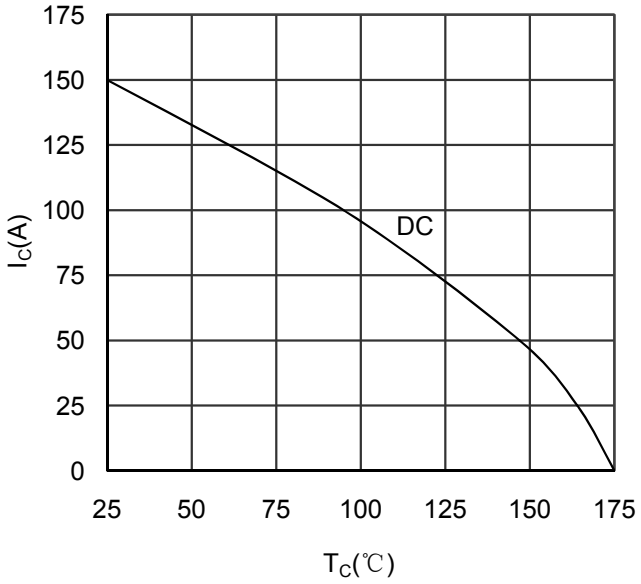


Figure 7. Collector Current vs Case temperature IGBT

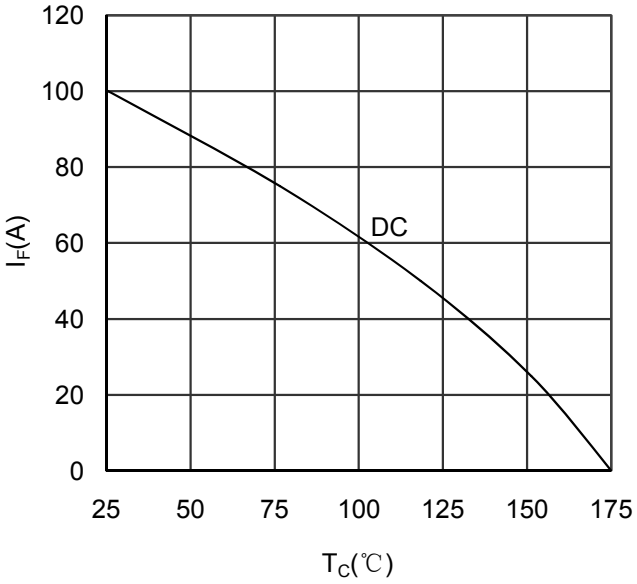


Figure 8. Forward current vs Case temperature Diode

Download from alldatasheet.com

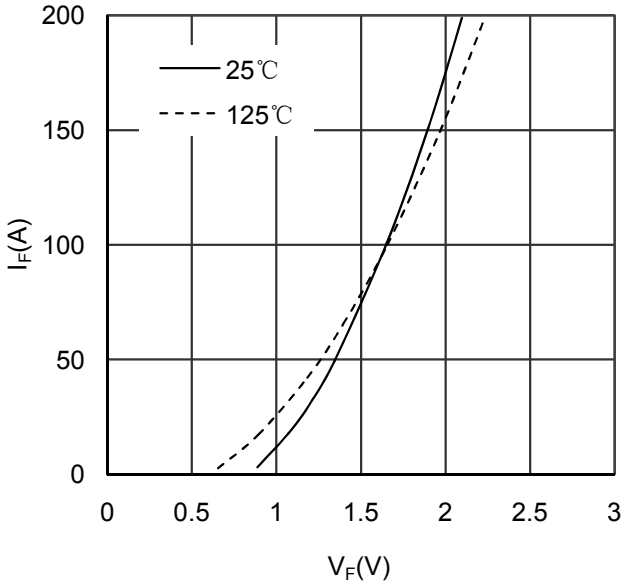


Figure 9. Diode Forward Characteristics Diode

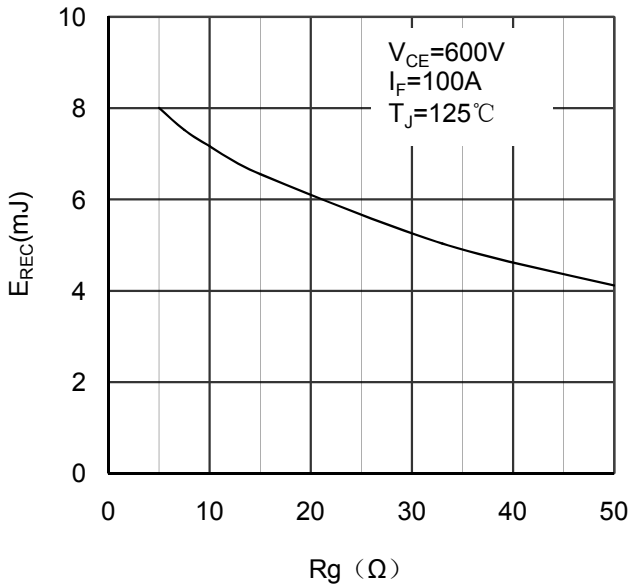


Figure 10. Switching Energy vs Gate Resistor Diode

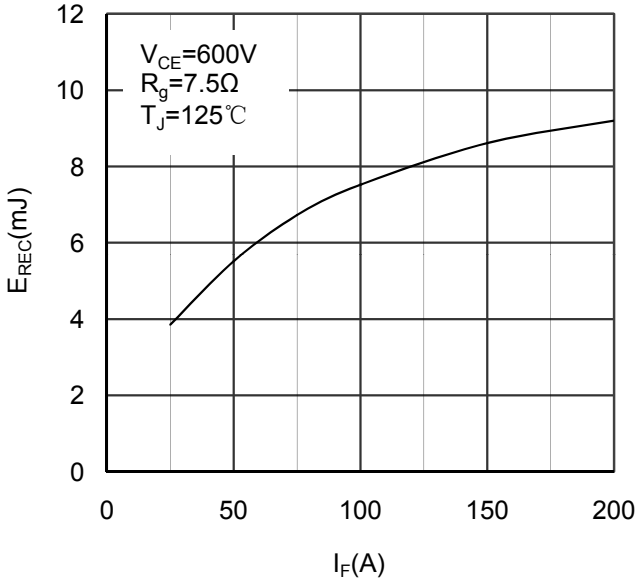


Figure 11. Switching Energy vs Forward Current Diode


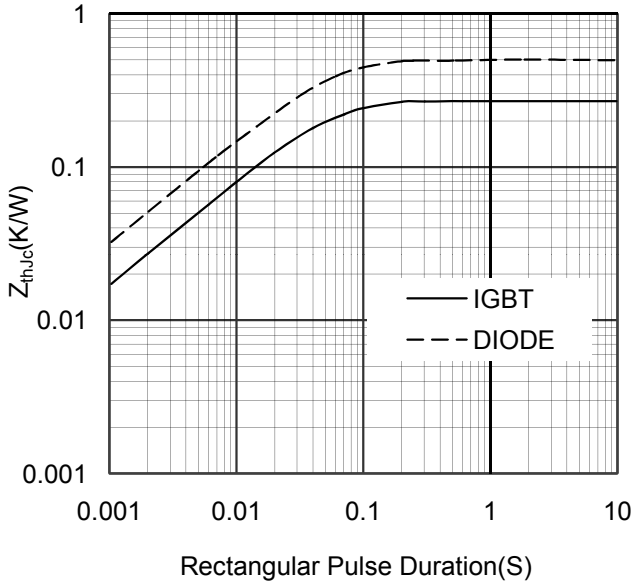


Figure 12. Transient Thermal Impedance of Diode and IGBT

Download from alldatasheet.com

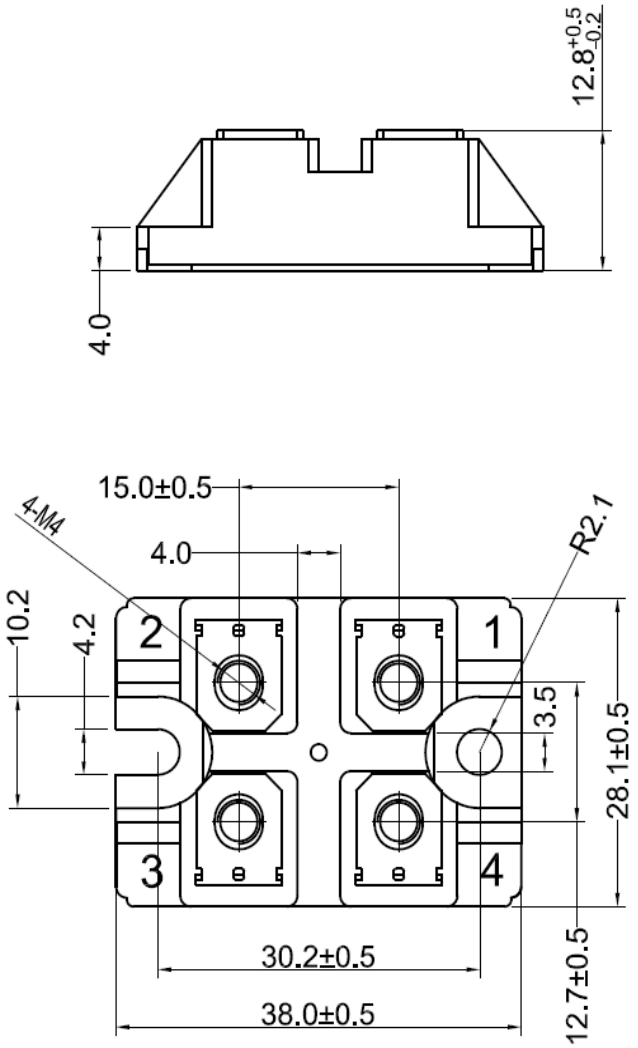

Dimensions in (mm)

Figure 13. Package Outline

Download from alldatasheet.com