

10BASE-T/ETHERNET ISOLATION TRANSFORMER

Turns Ratio ($\pm 5\%$)

1:1

TRIPLE STYLE

(3 Transformers per Package)

IEEE 802.3 (10 BASE 2, 10 BASE 5)
& ECMA Compatible

Flammability: Materials used in the production of these units meet requirements of UL94-VO and IEC 695-2-2 needle flame test.

Parts shipped in anti-static tubes. 34 pieces per tube

*SMD versions
available on
Tape & Reel*

Test Conditions:



Oscillation Voltage = 20mV

Oscillation Frequency = 100.0 KHz


Storage Temperature: -50°C to +130°C

PHYSICAL DIMENSIONS

All dimensions in inches (mm):

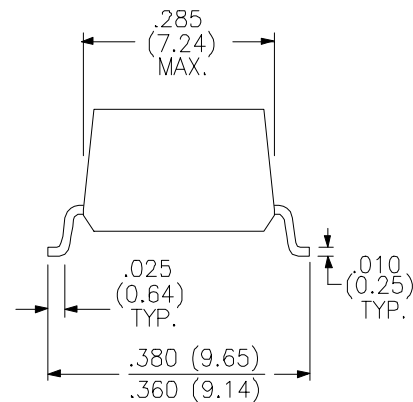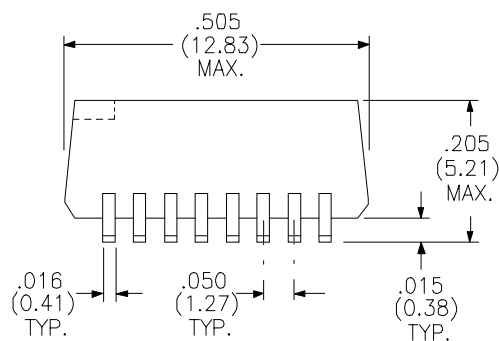

SCHEMATIC DIAGRAM:

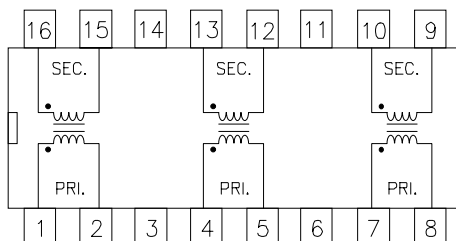

RHOMBUS P/N: **T-14001**

CUST P/N:

NAME:

DATE: 11/19/99

SHEET: 1 OF 1