# Printed-circuit board connector - BCH-381H-17 BK - 5452042

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)

The figure shows a 5-pos. version of the product in gray

Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Number of positions: 17, Pitch: 3.81 mm, Color: black, Contact surface: Tin, Mounting: Wave soldering

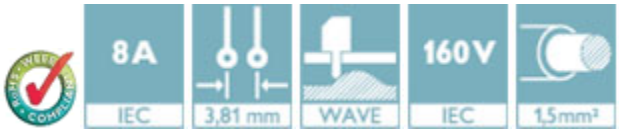


## Key Commercial Data

| | |
|---|---|
| Packing unit | 1 pc |
| Minimum order quantity | 100 pc |
| Custom tariff number | 85366990 |
| Country of origin | China |

## Classifications

### eCl@ss

| | |
|---|---|
| eCl@ss 4.0 | 272607xx |
| eCl@ss 4.1 | 27260701 |
| eCl@ss 5.0 | 27260701 |
| eCl@ss 5.1 | 27260701 |
| eCl@ss 6.0 | 27261101 |
| eCl@ss 7.0 | 27440401 |
| eCl@ss 8.0 | 27440402 |
| eCl@ss 9.0 | 27440402 |

### ETIM

| | |
|---|---|
| ETIM 3.0 | EC001121 |
| ETIM 4.0 | EC002637 |
| ETIM 5.0 | EC002637 |

# Printed-circuit board connector - BCH-381H-17 BK - 5452042

## Classifications

### UNSPSC

| | |
|---|---|
| UNSPSC 6.01 | 30211801 |
| UNSPSC 7.0901 | 39121432 |
| UNSPSC 11 | 39121432 |
| UNSPSC 12.01 | 39121409 |
| UNSPSC 13.2 | 39121432 |

## Approvals

### Approvals

Approvals

UL Recognized / cUL Recognized / VDE Gutachten mit Fertigungsüberwachung / IECEE CB Scheme / cULus Recognized

Ex Approvals

Approvals submitted

### Approval details

UL Recognized

| | B | D |
|---|---|---|
| Nominal current IN | 8 A | 8 A |
| Nominal voltage UN | 250 V | 300 V |

cUL Recognized

| | B | D |
|---|---|---|
| Nominal current IN | 8 A | 8 A |
| Nominal voltage UN | 250 V | 300 V |

# Printed-circuit board connector - BCH-381H-17 BK - 5452042

## Approvals

VDE Gutachten mit Fertigungsüberwachung

IECEE CB Scheme

cULus Recognized

## Drawings

Drilling diagram

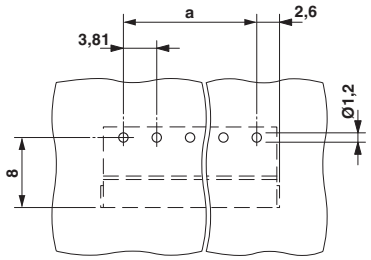


Dimensional drawing

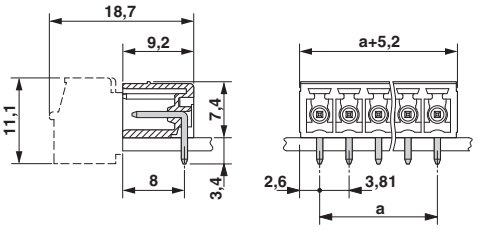


Phoenix Contact 2016 © - all rights reserved
http://www.phoenixcontact.com