

Polymer PTC Resettable Fuse: KRG Series



KRG030 Radial Leded Type 30V

■ Features

1. RoHS compliant
2. Radial leaded devices
3. Broadest range of resettable devices available in the industry
4. Current ratings from 0.9 to 9A
5. Maximum voltage is 30V
6. Operating temperature range : -40 ~ +85°C
7. Agency Recognition :UL /cUL/TUV




■ Recommended Applications

1. Motors, fans and blowers
2. Keyboard / mouse
3. Transformers
4. Industrial controls
5. Automotive electronics


■ Part Number Code

K	R	G	0	3	0	0	1	3	5	I	B	Y			
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Product Type K Thinking PPTC thermistor		Form Factor R Radial		Usage G General T Telecom		Max. Operating Voltage 016 16V 030 30V 060 60V Note : for telecom with Vmax. interrupt 250 250V 600 600V		I hold 0090 0.9A 0014 0.14A 0135 1.35A 0170 1.7A 0600 6A 1000 10A 1200 12A		Appearance S Straight lead I Inner kink lead F Y kink lead		Packaging B Bulk R Taping & Reel		Optional Suffix Y RoHS compliant	

■ Structure and Dimensions

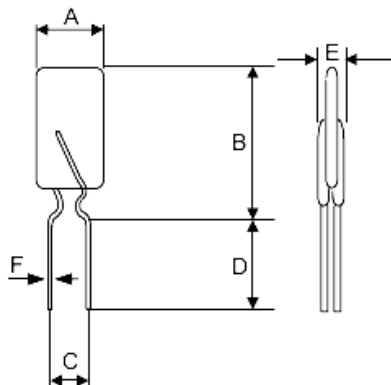

Inner kink lead (I type)

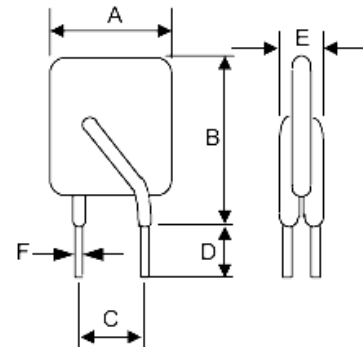

Straight lead (S type)

Polymer PTC Resettable Fuse: KRG Series



KRG030 Radial Leaded Type 30V

(Unit: mm)

Part no.	A	B		C	D	E	F
	Max.	S type	I type	Typ.	Typ.	Max.	Typ.
KRG0300090	7.4	12.2	12.2	5.0±0.8	10.5±0.5	3.0	0.5±0.02
KRG0300110	7.4	14.2	14.2	5.0±0.8	10.5±0.5	3.0	0.5±0.02
KRG0300135	8.9	13.5	13.5	5.0±0.8	10.5±0.5	3.0	0.5±0.02
KRG0300160	8.9	15.2	15.2	5.0±0.8	10.5±0.5	3.0	0.5±0.02
KRG0300185	10.2	15.7	15.7	5.0±0.8	10.5±0.5	3.0	0.5±0.02
KRG0300250	11.4	18.3	20.5	5.0±0.8	10.5±0.5	3.0	0.5±0.02
KRG0300300	11.4	17.3	21.8	5.0±0.8	11.0±0.8	3.0	0.8±0.02
KRG0300400	14.0	20.1	24.6	5.0±0.8	11.0±0.8	3.0	0.8±0.02
KRG0300500	14.0	24.9	26.6	10.0±0.8	11.0±0.8	3.0	0.8±0.02
KRG0300600	16.5	24.9	29.4	10.0±0.8	11.0±0.8	3.0	0.8±0.02
KRG0300700	19.1	26.7	31.2	10.0±0.8	11.0±0.8	3.0	0.8±0.02
KRG0300800	21.6	29.2	33.7	10.0±0.8	11.0±0.8	3.0	0.8±0.02
KRG0300900	24.1	29.7	34.2	10.0±0.8	11.0±0.8	3.0	0.8±0.02

■ Electrical Characteristics(23°C)

Part no.	Vmax.	I _{max} .	I _{hold} @ 23°C	I _{trip} @ 23°C	P _d (Typ.)	Maximum time to trip		Resistance (Ω)			Safety approvals	
	(V _{dc})	(A)	(A)	(A)	(W)	(A)	(Sec.)	Initial (R _i)		Post trip (R ₁)	UL/cUL	TUV
								Min.	Max.	Max		
KRG0300090	30	40	0.90	1.8	0.6	4.50	5.90	0.070	0.120	0.22	✓	✓
KRG0300110	30	40	1.10	2.2	0.7	5.50	6.60	0.050	0.100	0.17	✓	✓
KRG0300135	30	40	1.35	2.7	0.8	6.75	7.30	0.040	0.080	0.13	✓	✓
KRG0300160	30	40	1.60	3.2	0.9	8.00	8.00	0.030	0.070	0.11	✓	✓
KRG0300185	30	40	1.85	3.7	1.0	9.25	8.70	0.030	0.060	0.09	✓	✓
KRG0300250	30	40	2.50	5.0	1.2	12.50	10.30	0.020	0.040	0.07	✓	✓
KRG0300300	30	40	3.00	6.0	2.0	15.00	10.80	0.020	0.050	0.08	✓	✓
KRG0300400	30	40	4.00	8.0	2.5	20.00	12.70	0.010	0.030	0.05	✓	✓
KRG0300500	30	40	5.00	10.0	3.0	25.00	14.50	0.010	0.030	0.05	✓	✓
KRG0300600	30	40	6.00	12.0	3.5	30.00	16.00	0.005	0.020	0.04	✓	✓
KRG0300700	30	40	7.00	14.0	3.8	35.00	17.50	0.005	0.020	0.03	✓	✓
KRG0300800	30	40	8.00	16.0	4.0	40.00	18.80	0.005	0.013	0.02	✓	✓
KRG0300900	30	40	9.00	18.0	4.2	45.00	20.00	0.005	0.010	0.02	✓	✓

Note: UL&cUL File No. E138827


TUV File No. R50066618

Polymer PTC Resettable Fuse: KRG Series

KRG030 Radial Leded Type 30V




■ Typical Time to Trip Curves at 23°C

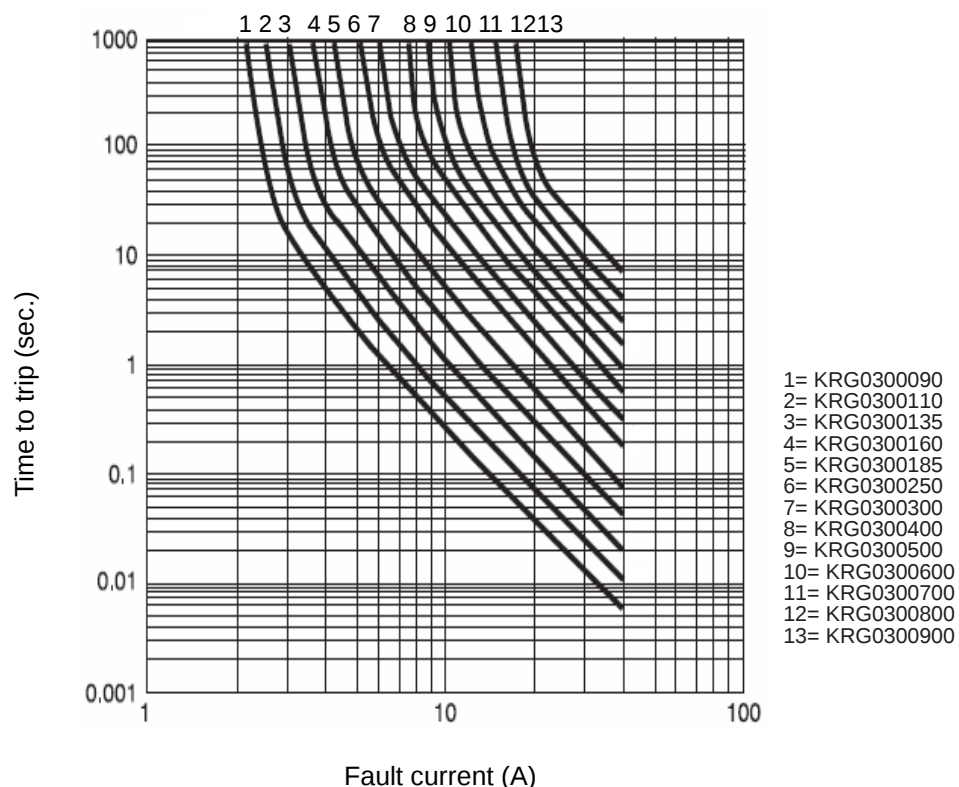

■ Thermal Derating Curve

Derating Curves for KRG 030 Series

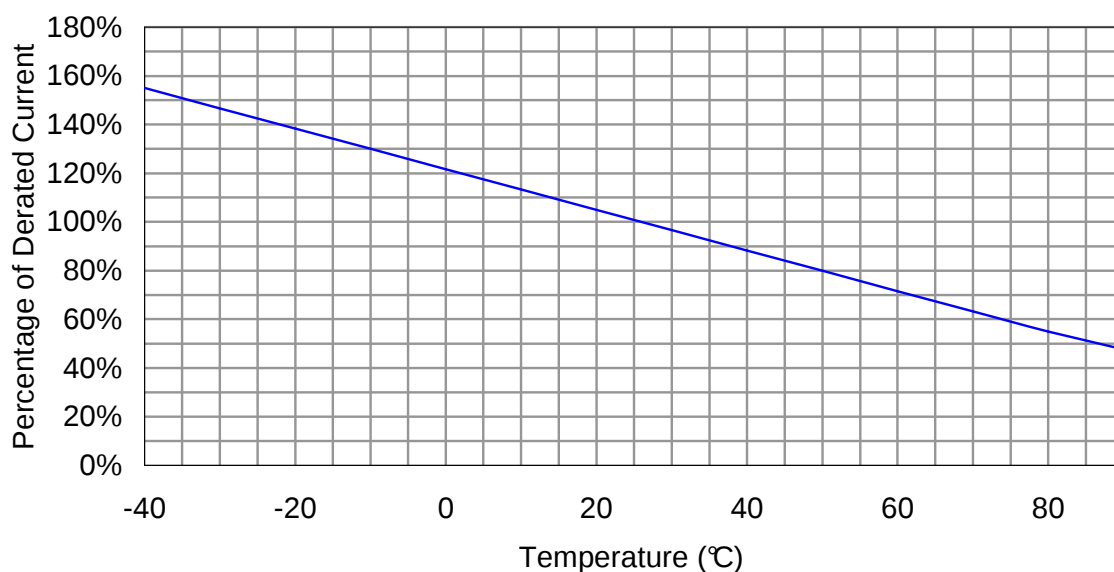

Polymer PTC Resettable Fuse: KRG Series

KRG030 Radial Leaded Type 30V



■ Reliability

Item	Standard	Test condition/methods	Criteria
Passive Aging	IEC60738-1	85±5℃, 1000±24hrs	±5% typical resistance change
Humidity storage	Specification Standard	85±5℃, 80~85%RH, 1000±24hrs	±5% typical resistance change
Rapid Change of Temperature	IEC60738-1	85±5/-40±5℃, 10 cycles	±5% typical resistance change
Overload Endurance	UL 1434	Vmax,120% Imax ,50 cycles Vmax,300% Itrip ,6000 cycles	No arcing or burring
Trip endurance	UL 1434	Vmax, Itrip ≤ I ≤ Imax , 1000±24hrs	No arcing or burring

Polymer PTC Resettable Fuse: KRG Series

KRG030 Radial Leaded Type 30V



■ Packaging

Devices taped using EIA468-B/IEC286-2 standards. See table below and Fig. 1~3 for details.

Dimension description	IEC Mark	Dimension (mm)	Tolerance (mm)
Sprocket hole pitch	P ₀	12.7	±0.3
Ordinate to adjacent component lead KRG0300090~KRG0300300	P ₁	3.6	±1.0
Ordinate to adjacent component lead KRG0300400	P ₁	3.45	±1.0
Ordinate to adjacent component lead KRG0300500~KRG0300900	P ₁	7.3	±1.0
Device pitch KRG0300090~KRG0300300	P	12.7	±1.0
Device pitch KRG0300400~KRG0300900	P	25.4	±1.0
Lead spacing	C	See " Structure and Dimensions"	--
Carrier tape width	W	18	±1.0
Top distance between tape edges	W ₀	3.0	Max
Hold-down tape width	W ₁	12	±1.0
Sprocket hole position	W ₂	9.0	+0.75/-0.5
Abscissa to top KRG0300090~KRG0300300	H ₁	32.2	Max.
Abscissa to top KRG0300400~KRG0300900		47.5	
Abscissa to plane (straight lead)	H	18.0	+2/-0
Abscissa to plane (kinked lead)	H ₀	16.0	±0.5
Sprocket hole diameter	D ₀	4	±0.2
Lead protrusion	L ₁	1	Max.
Tape thickness	t	0.9	Max.
Body lateral deviation	Δh	0	±1.0
Body tape plane deviation	Δp	0	±1.3
Reel width	W ₃	56	Max.
Reel diameter		340	±10
Arbor hole diameter	n ₀	31	±1
Core diameter	n	80	Min.

Polymer PTC Resettable Fuse: KRG Series

KRG030 Radial Leded Type 30V



● Taping Specification

Fig.1


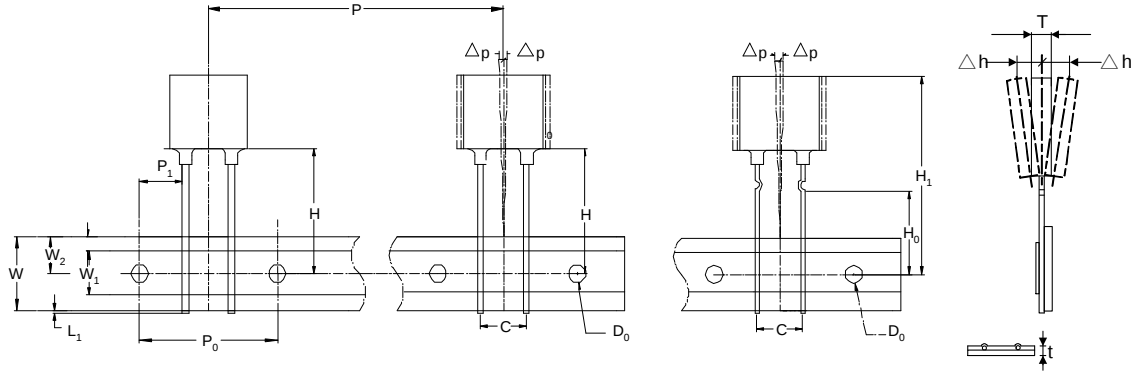


Fig.2

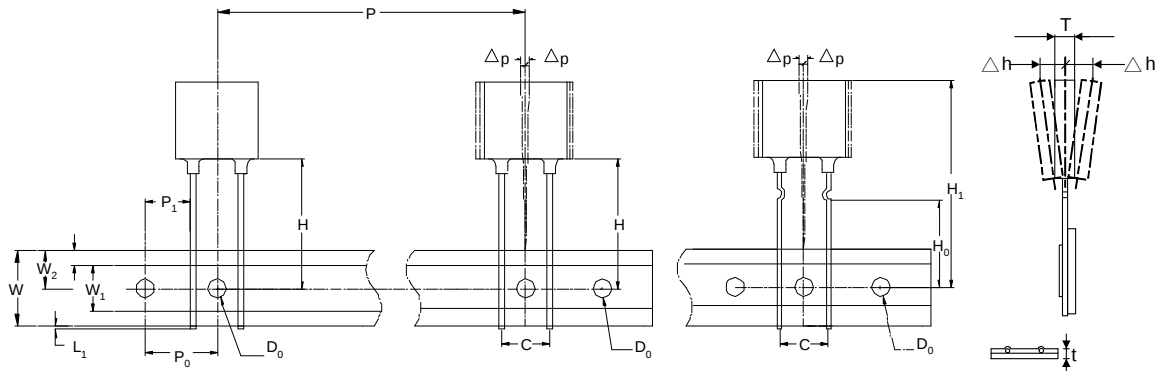


Note:

1. KRG0300090-KRG0300400, please refer to Fig. 1.
2. KRG0300500-KRG0300900, please refer to Fig 2.

● Reel Specification

Fig.3

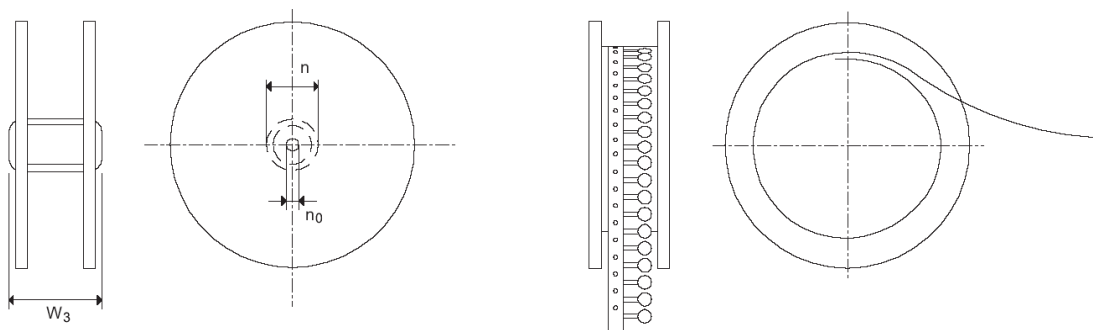

Polymer PTC Resettable Fuse: KRG Series

KRG030 Radial Leaded Type 30V



■ Quantity

Bulk packing


Series	Quantity PCS/Bag
KRG030 (0090~0135)	1000
KRG030 (0160~0600)	500
KRG030 (0700~0900)	250

Reel packing

Series	Quantity PCS/Reel
KRG030 (0090~0160)	3000
KRG030 (0185~0300)	2000
KRG030 (0400~0900)	1000

Ammo packing

Series	Quantity PCS/Box
KRG030 (0090~0300)	1500
KRG030 (0400~0700)	1000
KRG030 (0800~0900)	500

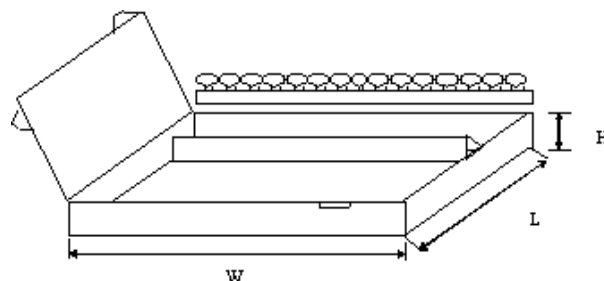

Unit: mm

W	L	H
348	185	73

■ Storage Conditions of Products

- Storage Conditions :
 - 1.Storage Temperature : $-10^{\circ}\text{C} \sim +40^{\circ}\text{C}$
 - 2.Relative Humidity : $\leq 75\% \text{RH}$
 3. Keep away from corrosive atmosphere and sunlight.
- Period of Storage : 1 year