
Green Power Solutions srl
Via Greto di Cornigliano 6R - 16152 Genova , Italy

Phone: +39-010-659 1869
Fax: +39-010-659 1870
Web: www.gpsemi.it
E-mail: info@gpsemi.it

GPDN4087

AVALANCHE RECTIFIER DIODE

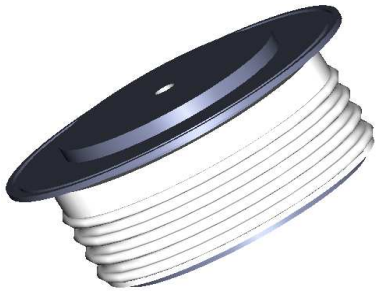

VOLTAGE UP TO	**3200 - 3800**	**V**
AVERAGE CURRENT	**870**	**A**
SURGE CURRENT	**8**	**kA**

BLOCKING CHARACTERISTICS

Characteristic		Conditions	Value	
V_{RRM}	Repetitive peak reverse voltage		3200 - 3800	V
V_{RSM}	Non-repetitive peak reverse voltage			V
I_{RRM}	Repetitive peak reverse current, max.	V_{RRM}, single phase, half wave, Tjmax	50	mA
P_{RSM}	Peak reverse power, max	Tjmax, tp = 20µs	50	kW

FORWARD CHARACTERISTICS

$I_{F(AV)}$	Average forward current	Sine wave,180° conduction, T h = 55℃	870	A
$I_{F(RMS)}$	R.M.S. forward current	Sine wave,180° conduction, Th = 55℃	1367	A
I_{FSM}	Surge forward current	Non rep. half sine wave, 50 Hz, V_R = 0 V, $T_j = T_{jmax}$	8	kA
I^2t	I^2 t for fusing coordination		320	kA^2s
$V_{F(TO)}$	Threshold voltage	$T_j = T_{jmax}$	1.01	V
r_F	Forward slope resistance	$T_j = T_{jmax}$	0.720	mΩ
V_{FM}	Peak forward voltage, max	Forward current I_F = 1000 A, Tj = Tjmax	1.73	V

SWITCHING CHARACTERISTICS

Q_{rr}	Rverse recovery charge, typ	$T_j = T_{jmax}$, I_F = 1000 A, di/dt = -5 A/µs		µC
I_{rr}	Reverse recovery current			A

THERMAL AND MECHANICAL CHARACTERISTICS

$R_{th(j-c)}$	Thermal resistance (junction to case)	Double side cooled	0.040	℃/W
$R_{th(c-h)}$	Thermal resistance (case to heatsink)	Double side cooled	0.007	℃/W
T_{jmax}	Max operating junction temperature		160	℃
T_{stg}	Storage temperature		-40 / 160	℃
F	Clamping force ± 10%		11	kN
	Mass		300	g