


Kontaktbezeichnung
contact marking




Anforderungsstufe 1
Performance Level 1

Kontaktbereich vergoldet
Mating Area gold plating




Anschlussbereich verzinkt 4-6 µm
Terminal Area 4-6 µm tin plating

Koplanarität der Anschlüsse ≤ 0.1 mm
Coplanarity Area of Termination ≤ 0.1 mm


Verpackt in Gurtverpackung
Tape on Reel Packaging
Verpackungseinheit: 1000 Stück
Packaging unit: 1000 pcs




Abspulrichtung - Reel off Direction

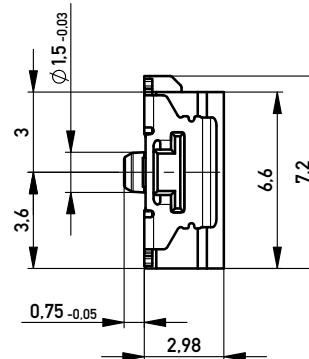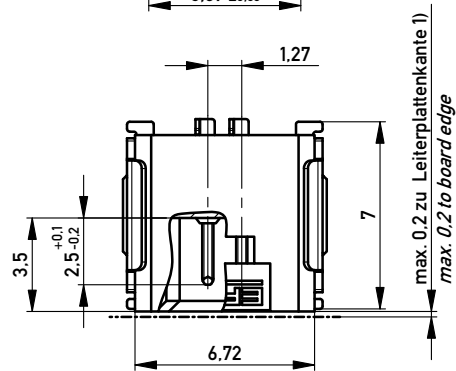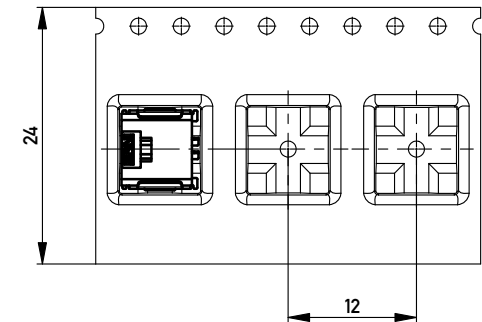

Leiterplatten-Layout für SMT
PCB-Layout for SMT

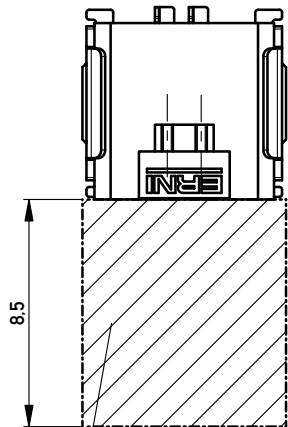

Sperrfläche für Leiterbahnen
gültig bei Verwendung von
Gegenstecker Federleiste 90°
in SKV Ausführung
Restricted area for conductors
valid for use by mating
female connector 90°
in IDC version

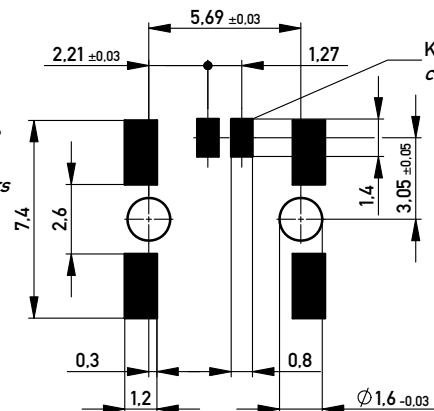

Kontaktbezeichnung bei Pin 1
contact marking at pin 1

1) gültig bei Verwendung von Gegenstecker Federleiste 90° in SMD Ausführung
valid for use by mating female connector 90° in SMD version

Information:		Tolerances		Scale	5:1
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		All Dimensions in mm		Designation	
		Subject to modification without prior notice. Drawing will not be updated.		M 1,27 SRC A, 2-polig BA1	
		www.ERNI.com		214011	
f	06.05.2013			I	
Index	Date			A3	
		Class		SRCA	

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 9006 to be observed.