

1

2

3

4

5


6

7

A

A

$L \pm 3\%$


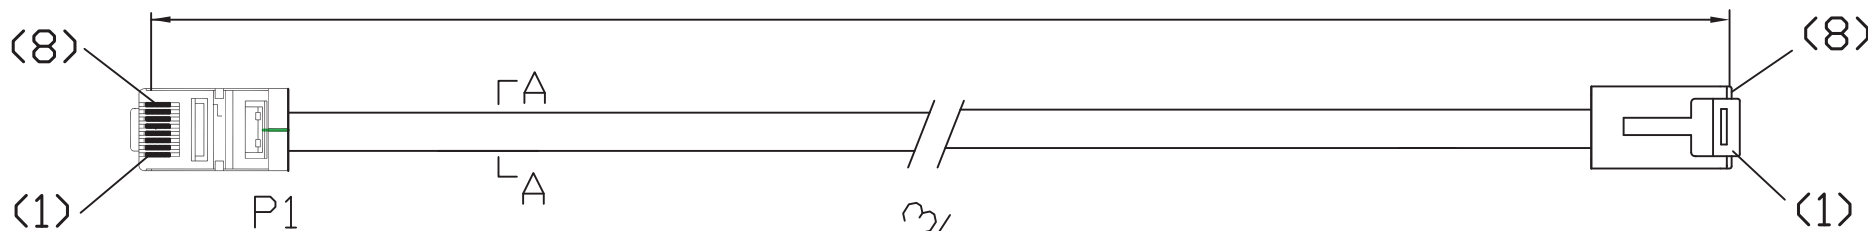


B

B


C

C

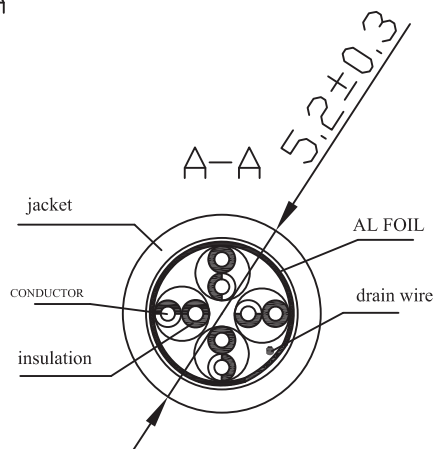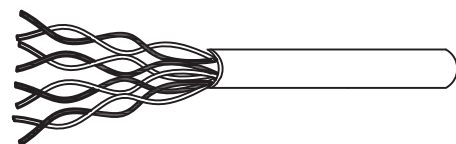

PIN OUT

P1	WIRE COLOR	P2
1	ORANGE/WHITE	1
2	ORANGE	2
3	GREEN/WHITE	3
6	GREEN	6
4	BLUE	4
5	BLUE/WHITE	5
7	BROWN/WHITE	7
8	BROWN	8

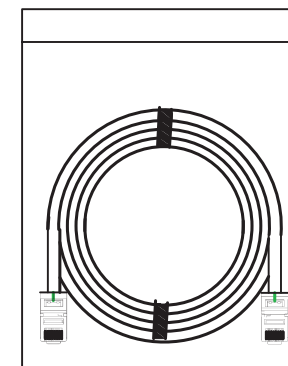

D

D

Material:

- Conductor: 26AWG 7*0.16±0.015mm
- Conductor Insulation color coding: (1)White/Orange, (1)Orange, (1)White/Green, (1)Green, (1)Blue, (1)White/Blue, (1)White/Brown, (1)Brown
- Cable Jacket printing: *CM (UL) C(UL) 4P 26AWG FTP CAT.5E PATCH CABLE ISO/IEC & EN & ANSI/TIA-568-C.2*
- Cable Assembly: White cable tie, Wiring T568B color, Plug RJ45 8P8C 50μ" pc UL 94V-2
- Cable Jacket color: Red, Yellow, Green or Blue
- Length: $L \pm 3\%$ m
- Dielectric strength: 2.5KV dc-2seconds
- Working temperatures: -20°C~60°C

E

E

F

F


Order Code: A-MCSP-80xxx/x-AP-R

Order lengths in meter: 0.5, 1, 2, 3, 5

Order color: Red, Yellow, Green, Blue

G

G

Scale						Date	Name	Title Cat5e FTP Patch cable Assembly type, 26AWG, colored
TOLERANCE						Drawn	18.02.13	
X.	±X					Approved	18.02.13	Groll
X.X	±X							
X.XX	±X							
DIM	TOL							
X.°	±X°							
X.X°	±X°	⊙	Drawn	18.02.13	Wilson			
Angle	TOL	Id.	Modification	Date	Name			

ASSMANN WSW-No. A-MCSP-80xxx/x-AP-R	
Drawing-No.	rev00
Replace	Sheet 1/1

Unit: mm



H

H

1

2

3

4

5

6

7