
MAGIC LED PLW111010 Series

Product Information



Description

Plessey MAGIC PLW111010 PLCC-2 SMT LEDs are designed for ambient decorative lighting and automotive interior applications. The light is emitted close to a Lambertian distribution and hence this SMT package is naturally suitable for backlighting instrument cluster panel and symbols. The LEDs are packed in reels containing 2000 pieces; every reel will be shipped in single intensity and colour bin, to provide close uniformity.


Features

- Industry standard PLCC-2
- Diffused pale yellow resin
- High reliability LED package
- High brightness using GaN-on-Silicon technology
- Wide viewing angle at 120° (half maximum)
- JEDEC MSL 4

Applications


- Decoration lighting
- Instrument panel backlighting
- Illumination symbols
- Navigation and audio system backlighting

Package Outline and Recommended Solder Pad

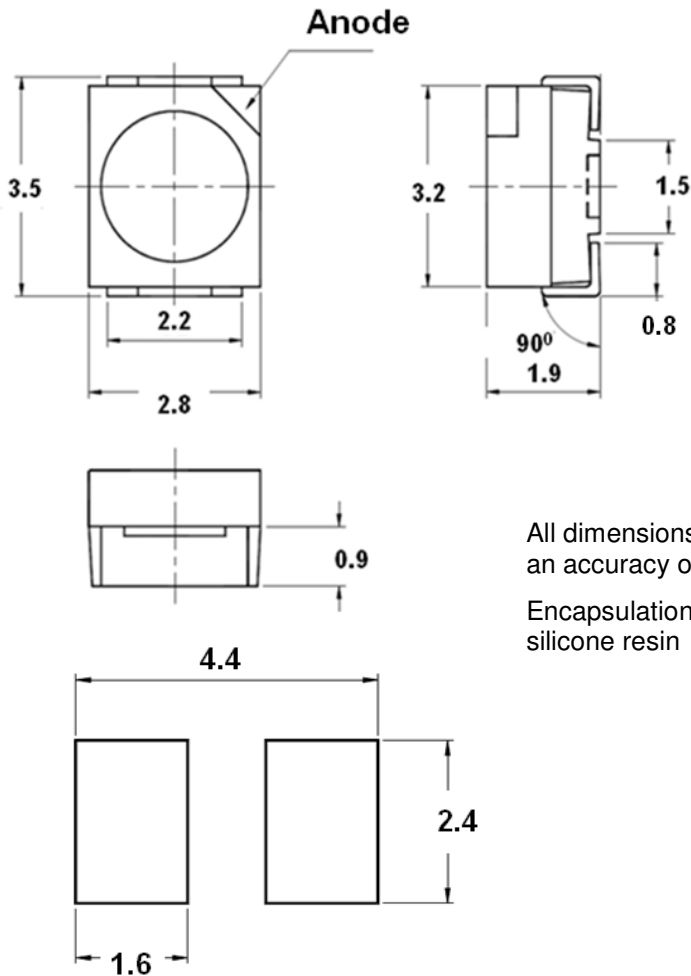

All dimensions are in millimetres with an accuracy of ± 0.2 millimetres

Encapsulation material: Yellow pale silicone resin



Recommended Soldering Pad Pattern

Note: Plessey LEDs are not designed to operate with reverse bias. Precautions are required to prevent reverse bias in applications and during handling. Reverse bias ESD is limited to 100 volts.

Electro-optical Characteristics (Ta = +25°C)

Parameter	Symbol	Condition	Min.	Typical	Max.	Unit
Forward Voltage	Vf	If=20mA	2.8	3.2	3.5	V
Reverse Current	Ir	Vr=5V	--	--	5	μA
Chromaticity Coordinates	x	If=20mA	0.26	--	0.39	
	y	If=20mA	0.23	--	0.41	
Half Intensity Angle	2Θ _{1/2}	If=20mA	--	120	--	deg

Absolute Maximum Ratings (Ta = +25°C)

Parameter	Symbol	Rating	Unit
DC Forward Current	If	25	mA
Peak Pulse Forward Current [1]	Ifp	50	mA
Reverse Voltage	Vr	5	V
Operating Temperature	Topr	-40 to +85	°C
Storage Temperature	Tstr	-40 to +100	°C


[1] Ifp conditions with pulse width ≤10ms and duty cycle ≤10%

Intensity Bin Groups


Group (If=20mA)	Luminous Intensity Iv [mcd]		Luminous Flux (typ.) ΦV [lm]
	Min.	Max.	
1A	230	280	800
2A	280	360	1010
1B	360	450	1260
2B	450	560	1570
1C	560	700	1950
2C	700	870	2430
1D	870	1080	3030

The above luminous intensities are given with +/- 11% tolerance.

Relative Spectral Emission (Typical)

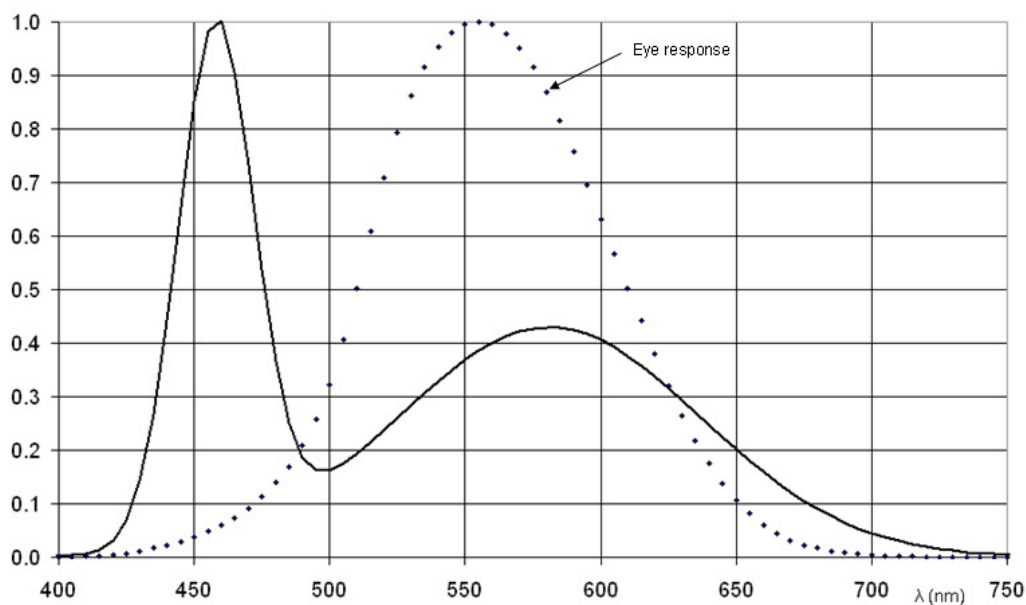

Angular light distribution

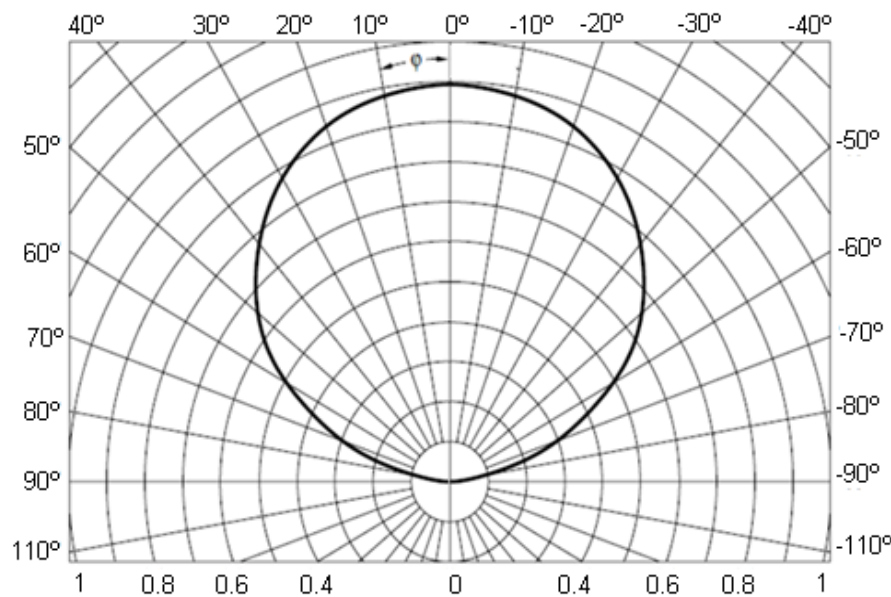



Color Chromaticity Groups

11W		1SW		1SE		1HE	
x	y	x	y	x	y	x	y
0.2570	0.2638	0.2611	0.2548	0.2701	0.2700	0.2659	0.2791
0.2660	0.2790	0.2701	0.2699	0.2789	0.2853	0.2752	0.2940
0.2700	0.2700	0.2740	0.2610	0.2831	0.2760	0.2789	0.2853
0.2612	0.2547	0.2652	0.2457	0.2740	0.2611	0.2700	0.2701
21W		2SW		2SE		2HE	
x	y	x	y	x	y	x	y
0.2652	0.2456	0.2692	0.2368	0.2781	0.2520	0.2741	0.2611
0.2740	0.2611	0.2781	0.2520	0.2871	0.2668	0.2830	0.2761
0.2782	0.2520	0.2822	0.2429	0.2910	0.2579	0.2871	0.2669
0.2692	0.2367	0.2732	0.2277	0.2821	0.2430	0.2782	0.2521
31W		3SW		3SE		3HE	
x	y	x	y	x	y	x	y
0.2752	0.2940	0.2788	0.2853	0.2910	0.3003	0.2880	0.3099
0.2880	0.3099	0.2911	0.3002	0.3032	0.3144	0.3010	0.3259
0.2911	0.3002	0.2940	0.2901	0.3053	0.3035	0.3031	0.3145
0.2788	0.2853	0.2829	0.2761	0.2939	0.2903	0.2911	0.3002
41W		4SW		4SE		4HE	
x	y	x	y	x	y	x	y
0.2829	0.2762	0.2871	0.2670	0.2971	0.2804	0.2940	0.2903
0.2939	0.2904	0.2971	0.2803	0.3074	0.2931	0.3053	0.3036
0.2972	0.2803	0.3000	0.2699	0.3092	0.2818	0.3073	0.2931
0.2871	0.2670	0.2909	0.2581	0.3000	0.2699	0.2971	0.2805
51W		5SW		5SE		5HE	
x	y	x	y	x	y	x	y
0.3001	0.3310	0.3027	0.3173	0.3181	0.3348	0.3164	0.3541
0.3164	0.3540	0.3180	0.3348	0.3326	0.3496	0.3325	0.3733
0.3181	0.3346	0.3195	0.3189	0.3325	0.3337	0.3325	0.3497
0.3027	0.3172	0.3056	0.3027	0.3195	0.3188	0.3181	0.3348
61W		6HE					
x	y	x	y				
0.3056	0.3027	0.3195	0.3190				
0.3195	0.3190	0.3325	0.3336				
0.3209	0.3037	0.3329	0.3186				
0.3083	0.2885	0.3209	0.3036				





7NW		8NW		7SW		8SW	
x	y	x	y	x	y	x	y
0.3300	0.3595	0.3610	0.3852	0.3297	0.3384	0.3579	0.3617
0.3438	0.3708	0.3774	0.3967	0.3421	0.3491	0.3727	0.3721
0.3421	0.3491	0.3729	0.3723	0.3408	0.3281	0.3687	0.3498
0.3298	0.3384	0.3577	0.3618	0.3303	0.3181	0.3552	0.3418
7NE		8NE		7SE		8SE	
x	y	x	y	x	y	x	y
0.3438	0.3708	0.3774	0.3967	0.3421	0.3491	0.3727	0.3721
0.3610	0.3850	0.3987	0.4116	0.3577	0.3620	0.3895	0.3823
0.3579	0.3617	0.3895	0.3823	0.3552	0.3416	0.3818	0.3579
0.3421	0.3491	0.3727	0.3723	0.3406	0.3283	0.3687	0.3500

Chromaticity coordinates tolerance for each bin is ± 0.015

Chromaticity coordinate groups

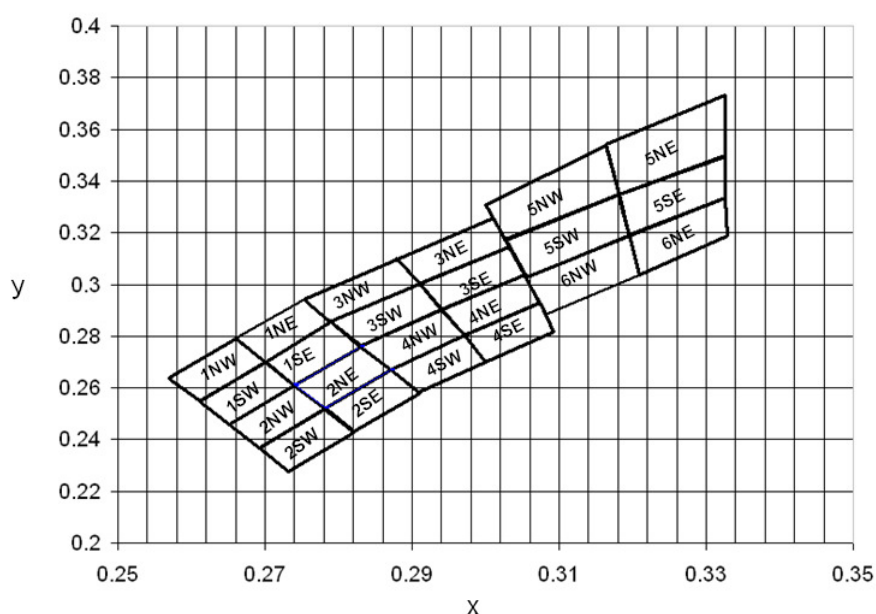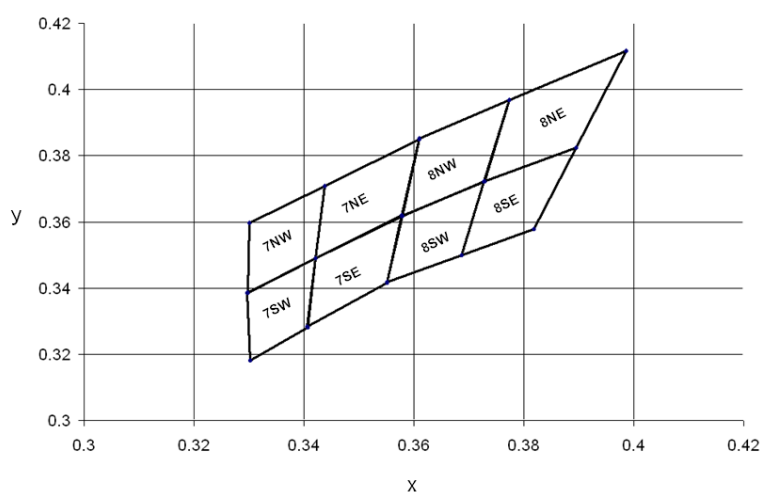


Characteristics curves

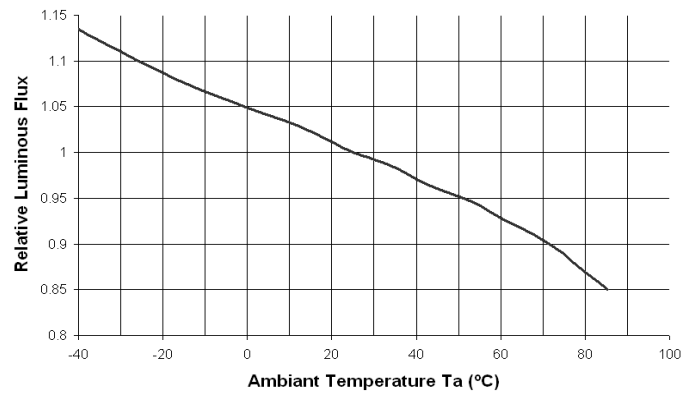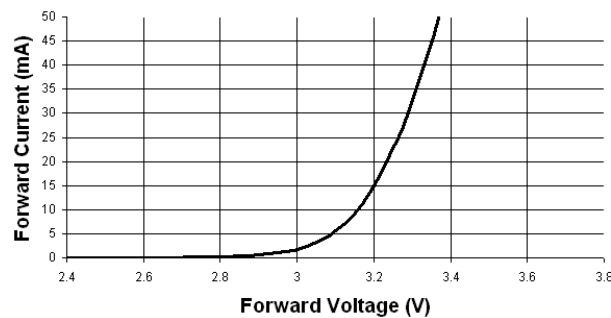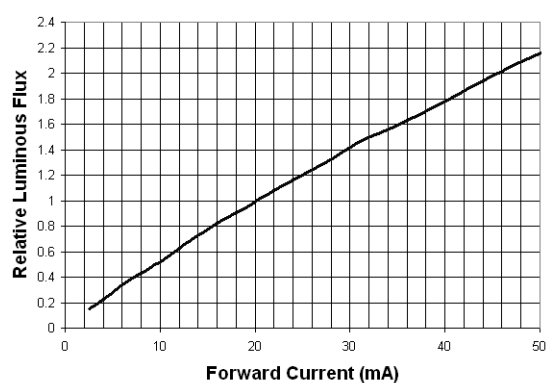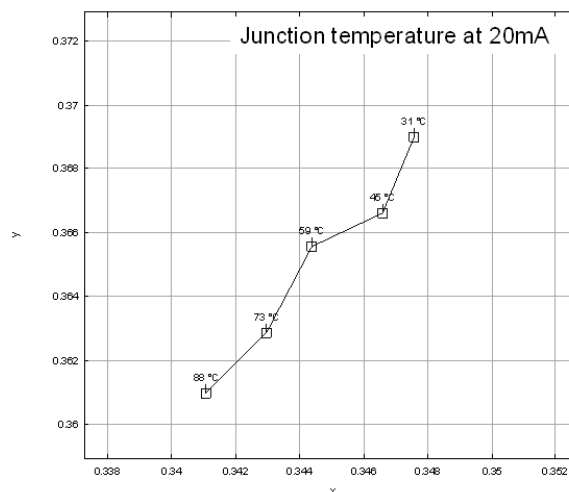

Reflow Soldering Profile

Reflow Soldering		Hand Soldering	
Pre-heat	160~180°C	Temperature	300°C Max.
Pre-heat time	120 seconds Max.	Soldering time	3 second Max. (one time only)
Peak temperature	260°C Max.		
Soldering time	10 seconds Max.		
Condition	Refer to Temperature-profile		

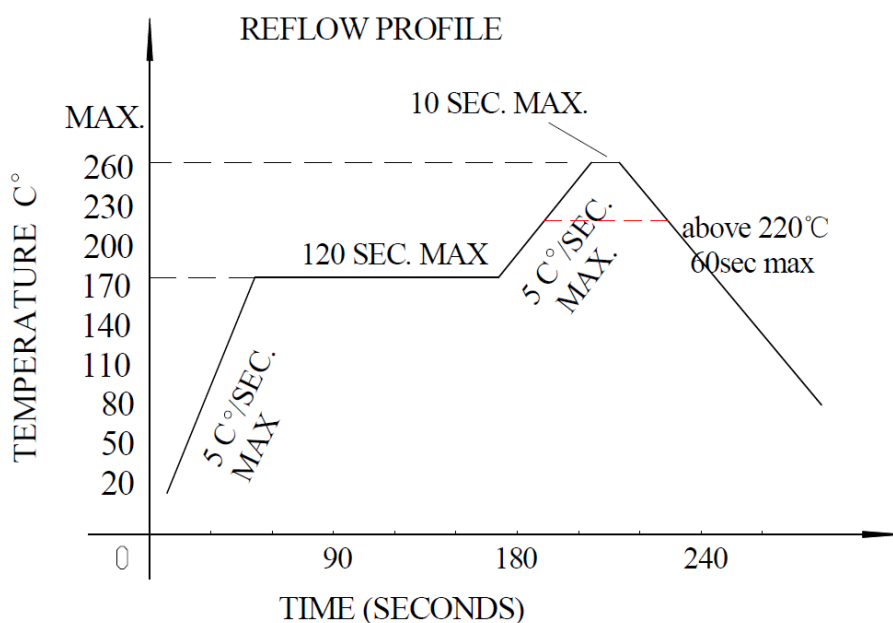

- Reflow soldering should not be done more than two times
- When soldering do not put stress on the LEDs during heating
- When hand soldering, the temperature of the iron must be kept under +300°C, and at that temperature keep the soldering time under 3 sec.
- Hand soldering should be done only one time
- The rework must be completed within 5 sec under +260°C
- The head of iron should not touch the resin

Legal Notice

Product information provided by Plessey Semiconductors Limited ("Plessey") in this document is believed to be correct and accurate. Plessey reserves the right to change/correct the specifications and other data or information relating to products without notice but Plessey accepts no liability for errors that may appear in this document, howsoever occurring, or liability arising from the use or application of any information or data provided herein. Neither the supply of such information, nor the purchase or use of products conveys any licence or permission under patent, copyright, trademark or other intellectual property right of Plessey or third parties.

Products sold by Plessey are subject to its standard Terms and Conditions of Sale that are available on request. No warranty is given that products do not infringe the intellectual property rights of third parties, and furthermore, the use of products in certain ways or in combination with Plessey, or non-Plessey furnished equipments/components may infringe intellectual property rights of Plessey.

The purpose of this document is to provide information only and it may not be used, applied or reproduced (in whole or in part) for any purpose nor be taken as a representation relating to the products in question. No warranty or guarantee express or implied is made concerning the capability, performance or suitability of any product, and information concerning possible applications or methods of use is provided for guidance only and not as a recommendation. The user is solely responsible for determining the performance and suitability of the product in any application and checking that any specification or data it seeks to rely on has not been superseded.

Products are intended for normal commercial applications. For applications requiring unusual environmental requirements, extended temperature range, or high reliability capability (e.g. military, or medical applications), special processing/testing/conditions of sale may be available on application to Plessey.