



SHEET 1 OF 1

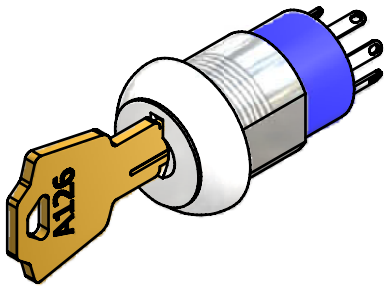


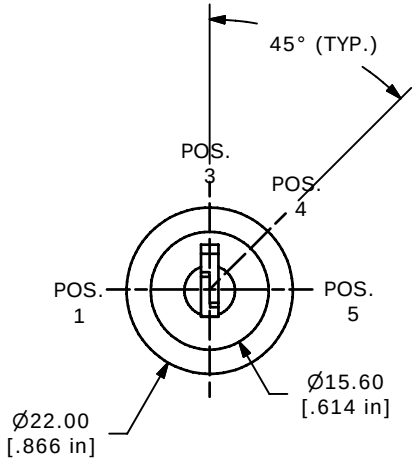

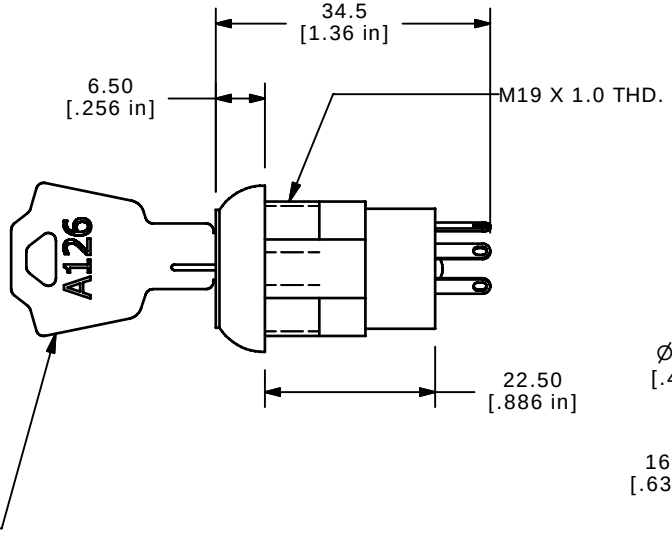

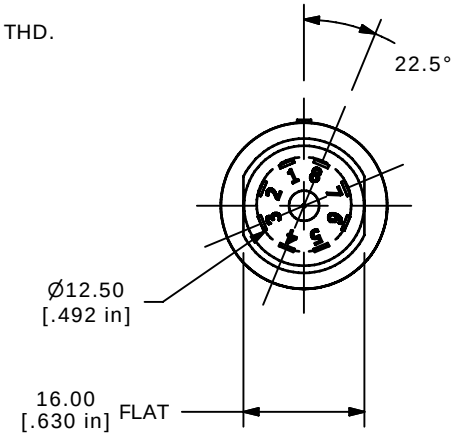


NOTES:
1. ALL DIMENSIONS IN MM[INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
   X.XX = ± 0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 4A @ 125VAC, 2A @ 250VAC
5. CONTACT RESISTANCE: 20 milli-OHMS MAX.
6. DIELECTRIC STRENGTH: 1,500 VAC-1Minute
7. MATERIALS:
   HOUSING: NICKEL PLATED ZINC ALLOYWITH NICKEL FACING
   CYLINDER: NICKEL PLATED ZINC ALLOY
   TERMINAL AND CONTACTS: GOLD PLATED COPPER ALLOY
   KEYS (2): BRASS
8. 2002/95/EC (ROHS) COMPLIANT



CIRCUIT: SP (90°-45°-45° INDEXING)
CONTACT CONFIGURATION

CONNECTED TERMINAL #				
POS. 1		POS. 3	POS. 4	POS. 5
6-7		7-1	1-2	2-3

LEGEND
= Detent positions
= Key pull possible in these positions

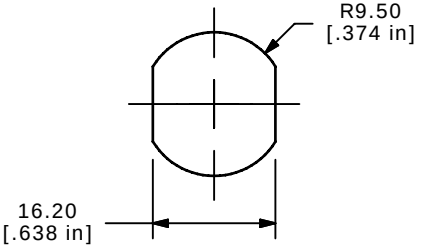

RECOMMENDED PANEL LAYOUT

REV	PCR NO	DESCRIPTION	DATE	BY
A	20568	Release For Production	4/25/12	rc

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH | LAMB INDUSTRIES

TITLE KO130Z1A126

SCALE	DATE	DR	DWG	REV
1:1	4/25/2012	rc	K200298	A