

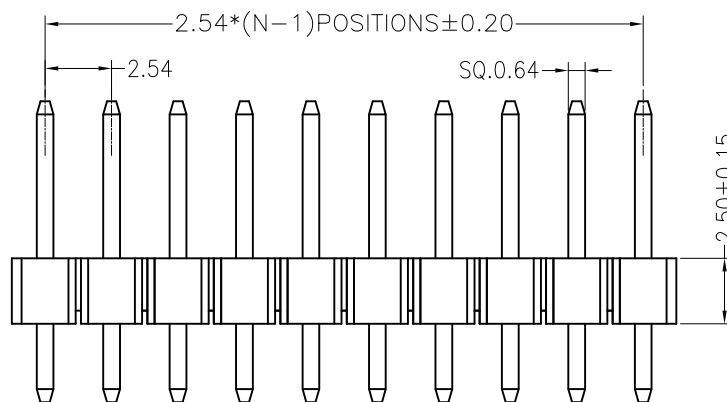
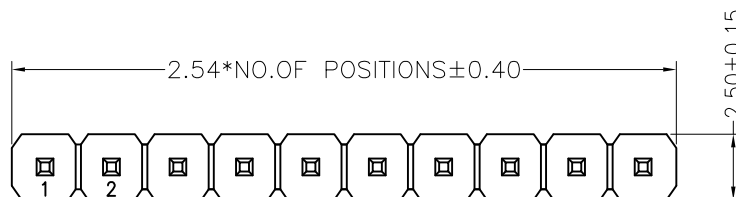


Recommended P.C.B Layout
P.C.B Board Tolerance±0.05

NOTES:

Voltage Rating:250V AC/DC
Current Rating:3.0A AC/DC
Dielectric Withstand Voltage:500V AC/minute
Contact Voltage:20M Max.
Insulation Voltage:1000M Min
Operation temperature:-40 °C to +105 °C
Insulator Material:Polyester.UL94V-0
Contact Material:Brass
Contact Plating:AuorSn Plated on Nickel Overall

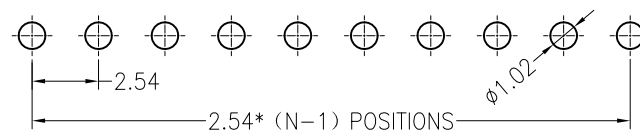

塑胶高度可选 (mm)				常用
H	1.0	1.5	2.0	2.54

Dimension antitheses list				
item	PA	---	PC	L
Standard	6.00	---	3.00	11.50
Alternate	---	---	---	---

AO	VER	MODIFICATION	DRAW	DATE
----	-----	--------------	------	------

TOLERANCE UNLESS OTHERWISE				DRAWN	CK tan
X.	±0.30	X°	±5°	CHKD	
.X	±0.20	.X°	±2°	APPD	
.XX	±0.08	.XX°	±1°	VIEW	⊕
.XXX	±0.03	.XXX°	±0.5°		

XFCN兴飞连接器有限公司 CONNECTORS XFCN CONNECTORS CO., LTD.		PRODUCT NAME	2.54mm Pin Header Connectors
		PART. NO.	PZ254V-11-XX

SHEET	1/1
DATE	2010. 4. 12
UNITS	mm
SCALE	1:1
DWG NO.	009