MMD100E160X

100A Three-Phase Rectifier Bridge Module

February 2017 Version 5 RoHS Compliant

PRODUCT FEATURES

☐ Low Forward Voltage

☐ High Surge Current Capability

☐ Low Leakage Current

☐ Low Inductance Package


APPLICATIONS

☐ Field Supply For DC Motors

☐ Line Rectifiers For Transistorized AC Motor Controllers

☐ Non-controllable Rectifiers For AC/DC Converter

☐ UL:E332185





Module Type

Module Type	V_{RRM} Repetitive Peak Reverse Voltage	V_{RSM} Non-Repetitive Peak Reverse Voltage	Unit
MMD100E160X	1600	1700	V

ABSOLUTE MAXIMUM RATINGS(T_C =25°C unless otherwise specified)

Symbol	Parameter/Test Conditions		Values	Unit
I_D	Output Current(D.C.)	Three phase, full wave, Tc= 95℃	100	A
I_{FSM}	Non-Repetitive Surge Forward Current	1/2 cycle, 50HZ, peak value, T_J =45℃	1000	A
		1/2 cycle, 60HZ, peak value, T_J =45℃	1100	A
I^2t	For Fusing	1/2 cycle, 50HZ, peak value ,T_J =45℃	5.0	KA^2S
		1/2 cycle, 60HZ, peak value, T_J =45℃	5.1	KA^2S
P_D	Power Dissipation		830	W
T_J	Junction Temperature		-40 to +150	℃
T_{STG}	Storage Temperature Range		-40 to +125	℃
V_{ISO}	Isolation Breakdown Voltage	AC, 50Hz(R.M.S), t=1minute	3000	V
Torque	Module to Sink	Recommended（M5）	2.5～5	Nm
Torque	Module Electrodes	Recommended（M5）	2.5～5	Nm
R_{thJC}	Junction to Case Thermal Resistance	per diode	0.9	K /W
		per module	0.15	K /W
Weight			150	g

MacMic Science & Technology Co., Ltd.

Add：#18, Hua Shan Zhong Lu, New District, Changzhou City, Jiangsu Province, P. R .of China

Tel.：+86-519-85163708 Fax：+86-519-85162291 Post Code：213022 Website：www.macmicst.com

Download from alldatasheet.com

ELECTRICAL CHARACTERISTICS *(T_C =25°C unless otherwise specified)*

Symbol	Parameter/Test Conditions		Min.	Typ.	Max.	Unit
I_{RM}	Maximum Reverse Leakage Current	$V_R = V_{RRM}$			0.5	mA
		$V_R = V_{RRM}$, T_J = 125℃			10	
V_F	Forward Voltage Drop	I_F=100A			1.35	V
V_{TO}	For power loss calculations only , T_J = 125℃				0.92	V
r_T					3.8	mΩ

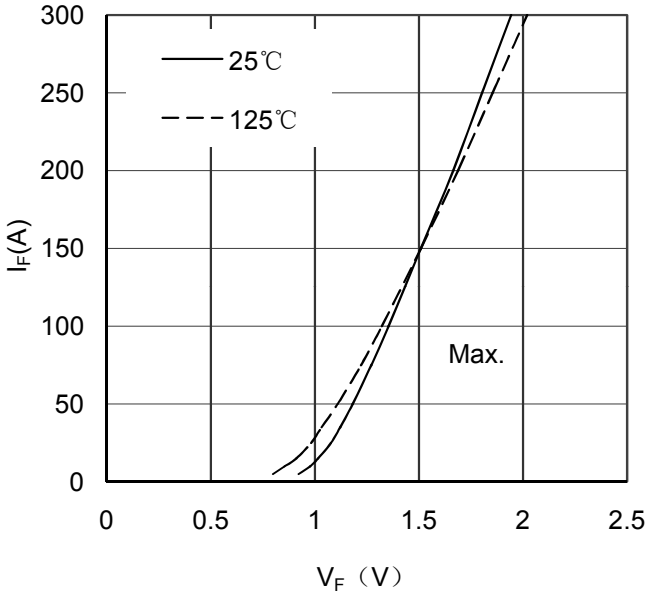


Figure 1. Forward Voltage Drop vs Forward Current

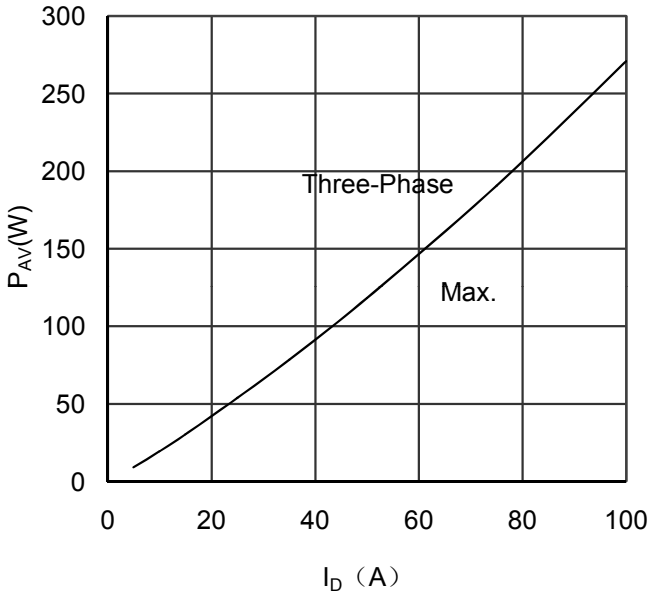


Figure 2. Power dissipation vs Output Current

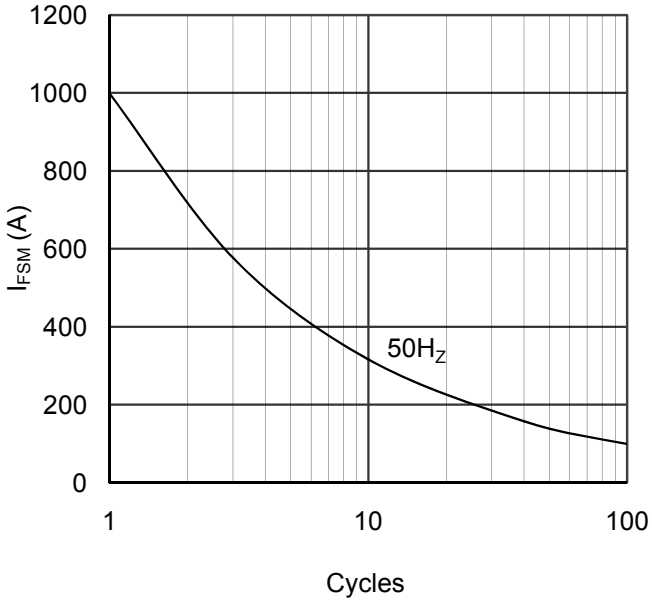


Figure 3. Max Non-Repetitive Forward Surge Current


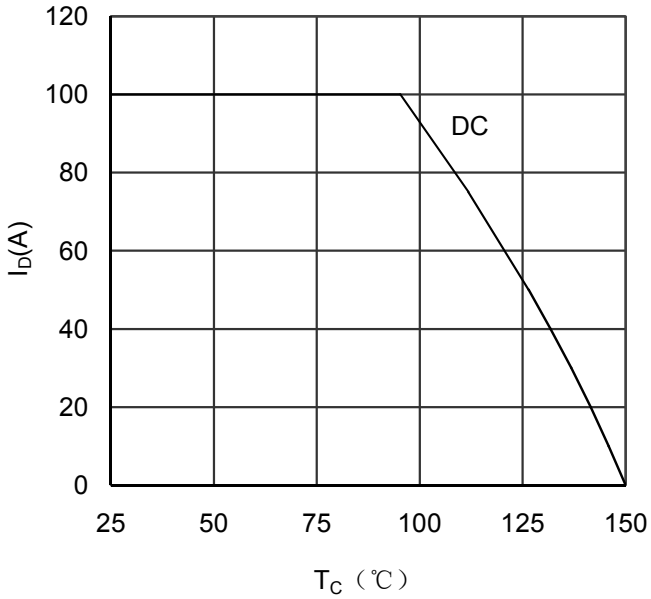



Figure 4. Output current vs Case temperature

Download from alldatasheet.com

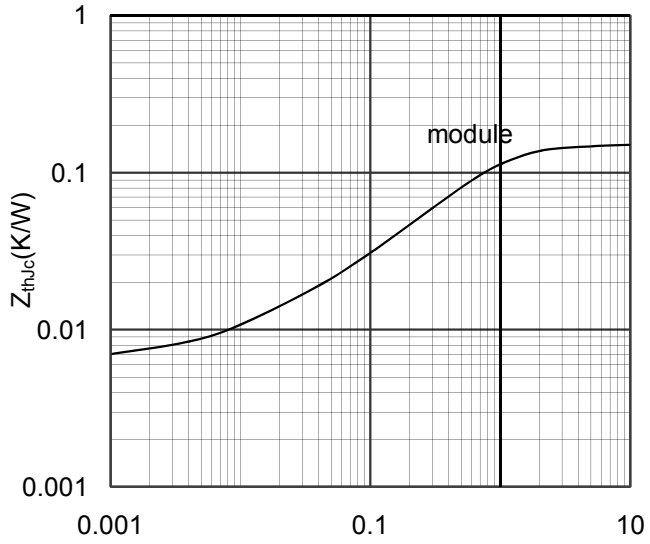

Rectangular Pulse Duration(S)

Figure 5. Transient Thermal Impedance

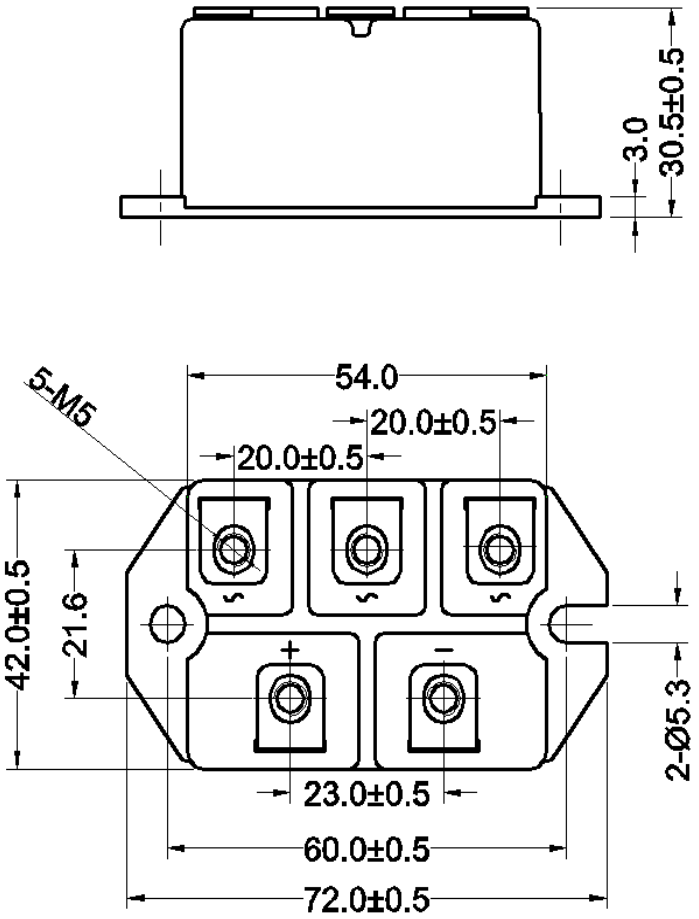

Dimensions in (mm)

Figure 6. Package Outline

Download from alldatasheet.com