



# UGF10A THRU UGF10K



SURFACE MOUNT GLASS PASSIVATED JUNCTION ULTRAFAST EFFICIENT RECTIFIER

Reverse Voltage - 50 to 800 Volts

Forward Current - 1.0 Ampere

**PATENTED**

DO-214AC

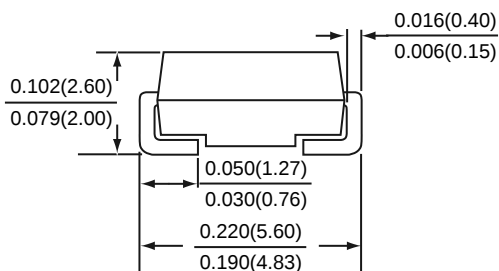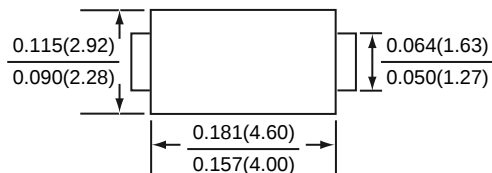

\*Dimensions in inches and (millimeters)

**SUPEREX II**<sup>TM</sup>



## FEATURES

- \* GPRC (Glass Passivated Rectifier Chip) inside
- \* Glass passivated cavity-free junction
- \* Ideal for surface mount automotive applications
- \* Ultrafast recovery time for high efficiency
- \* Built-in strain relief
- \* Easy pick and place
- \* High temperature soldering guaranteed: 260°C/10 seconds, at terminals
- \* Plastic package has Underwriters Laboratory Flammability Classification 94V-0

## MECHANICAL DATA

**Case :** JEDEC DO-214AC molded plastic over passivated chip

**Terminals :** Solder plated , solderable per MIL-STD-750, Method 2026

**Polarity :** Color band denotes cathode end

**Mounting Position :** Any

**Weight :** 0.002 ounces , 0.064 gram

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

| Ratings at 25 °C ambient temperature<br>unless otherwise specified.               | SYMBOLS | UGF10       |     |     |      |     |     |     | UNITS  |
|-----------------------------------------------------------------------------------|---------|-------------|-----|-----|------|-----|-----|-----|--------|
|                                                                                   |         | A           | B   | D   | F    | G   | J   | K   |        |
| Maximum repetitive peak reverse voltage                                           | VRRM    | 50          | 100 | 200 | 300  | 400 | 600 | 800 | Volts  |
| Maximum RMS voltage                                                               | VRMS    | 35          | 70  | 140 | 210  | 280 | 420 | 560 | Volts  |
| Maximum DC blocking voltage                                                       | VDC     | 50          | 100 | 200 | 300  | 400 | 600 | 800 | Volts  |
| Maximum average forward rectified current TA=55°C                                 | I (AV)  | 1.0         |     |     |      |     |     |     | Amps   |
| Peak forward surge current 8.3ms single half sine-wave superimposed on rated load | IFSM    | 30          |     |     |      |     | 25  |     | Amps   |
| Maximum instantaneous forward voltage at 1.0 A                                    | VF      | 0.95        |     |     | 1.25 |     | 1.7 | 2.2 | Volts  |
| Maximum DC reverse current<br>TA=25°C<br>at rated DC blocking voltage<br>TA=125°C | IR      | 5<br>50     |     |     |      |     |     |     | uA     |
| Maximum reverse recovery time (NOTE 1)                                            | trr     | 35          |     |     |      |     |     |     | nS     |
| Typical junction capacitance (NOTE 2)                                             | CJ      | 10          |     |     |      |     |     |     | pF     |
| Typical thermal resistance (NOTE 3)                                               | R θJA   | 34          |     |     |      |     |     |     | °C / W |
| Operating junction and storage temperature range                                  | TJ,TSTG | -55 to +150 |     |     |      |     |     |     | °C     |

NOTES : (1) Reverse recovery test condition : IF 0.5A, IR=1.0A, Irr=0.25A

(2) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts

(3) Thermal resistance from junction to ambient and from junction to lead P.C.B. mounted on 0.2 x 0.2" (5.0 x 5.0mm) copper pad areas.

# RATINGS AND CHARACTERISTIC CURVES UGF10A THRU UGF10K

FIG.1 - FORWARD CURRENT DERATING CURVE

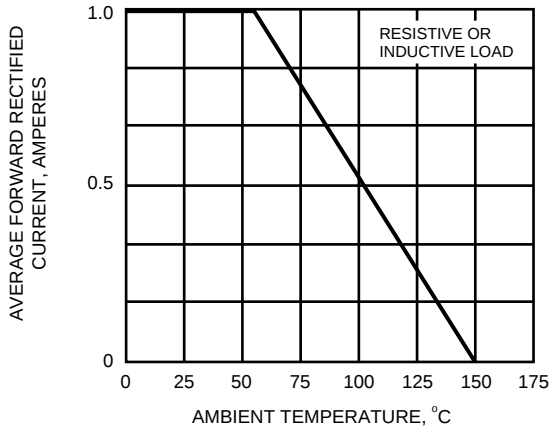


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

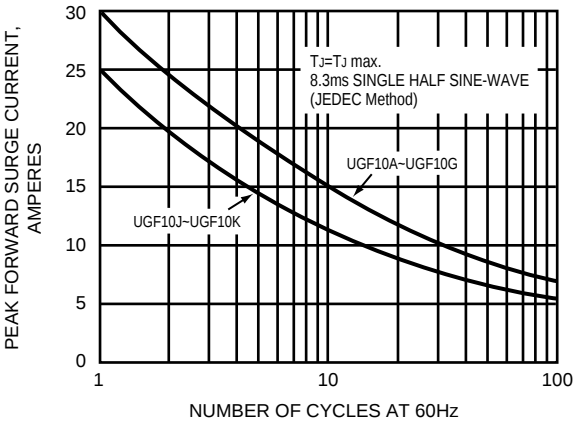


FIG.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

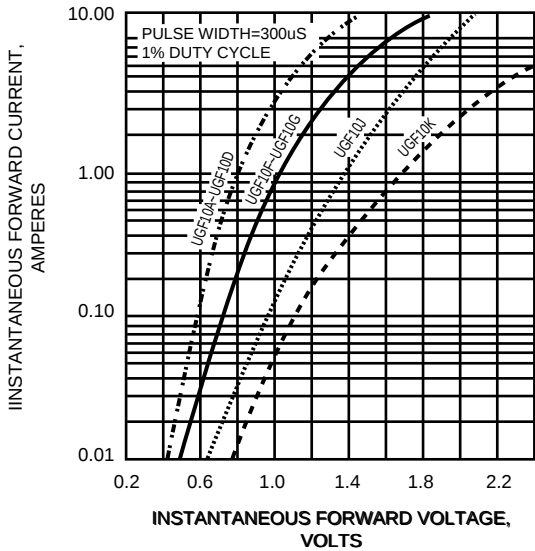


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

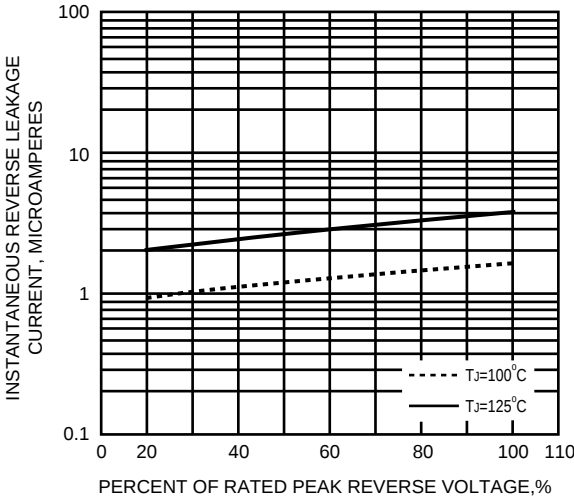


FIG.5 - TYPICAL JUNCTION CAPACITANCE

