

1.1 Overview

1.1.1 Overview

The MN103S is a 32-bit microcontroller combining ease of use intended for programs development in the C language with a simple, high-performance architecture made possible through pursuit of cost performance.

Built around a compact 32-bit CPU with a basic instruction word length of 1 byte, this LSI includes internal memory for instructions and data, a clock generator, bus controller, interrupt controller, watchdog timer, standard peripheral circuitry such as timers and serial interfaces, PWM circuit best suited to controlling 3-phase motors and A/D converters for motor position control. The MN103S Series' high-speed CPU coupled with abundance of peripheral features provides an easy means of developing low-cost, high-performance and multifunctional system on chip for motor and power control applications requiring fast response - a feature previously unavailable with conventional microcontrollers.

1.1.2 Product Summary

This manual describes the following model.

Table:1.1.1 Product Summary

Model	ROM Size	RAM Size	Classification
MN103SFM8K	256 K	8 K	Flash EEPROM version

1.2 Hardware Functions

CPU Core	<p>MN103S core</p> <p>4 GB of linear address space (for instructions / data)</p> <p>LOAD/STORE architecture with 5-stage pipeline</p> <p>46 basic instructions + 4 extension instructions</p> <p>6 addressing modes</p> <p>Instruction set of 1 byte in word length</p> <p>Machine cycle: 16.7 ns (oscillation frequency: 10 MHz, 6 multiply)</p> <p>Operation mode: Normal mode</p>
Oscillation Circuit	<p>External high-speed oscillation (crystal/ ceramic)</p>
Clock Multiplication Circuit	<p>External high-speed oscillation is multiplied by 4, 6 and 8.</p>
Operating voltage	<p>3.6 V to 5.5 V</p>
Guaranteed operating temperature	<p>-40 °C to 85 °C</p>
Internal Memory	<p>ROM 256 Kbytes RAM 8 Kbytes</p>
Interrupts	<p>Non-maskable interrupt:</p> <p> Watchdog timer overflow interrupts, System error interrupts</p> <p>Internal interrupts: 47 interrupts</p> <p><Timer Interrupts></p> <p>Timer 0 underflow interrupts</p> <p>Timer 1 underflow interrupts</p> <p>Timer 2 underflow interrupts</p> <p>Timer 3 underflow interrupts</p> <p>Timer 4 underflow interrupts</p> <p>Timer 5 underflow interrupts</p> <p>Timer 6 underflow interrupts</p> <p>Timer 7 underflow interrupts</p> <p>Timer 8 overflow/underflow interrupts</p> <p>Timer 8 compare/capture A interrupts</p> <p>Timer 8 compare/capture B interrupts</p> <p>Timer 9 overflow/underflow interrupts</p> <p>Timer 9 compare/capture A interrupts</p> <p>Timer 9 compare/capture B interrupts</p> <p>Timer 10 overflow/underflow interrupts</p> <p>Timer 10 compare/capture A interrupts</p> <p>Timer 10 compare/capture B interrupts</p> <p>Timer 11 overflow/underflow interrupts</p> <p>Timer 11 compare/capture A interrupts</p> <p>Timer 11 compare/capture B interrupts</p> <p>Timer 12 overflow/underflow interrupts</p> <p>Timer 12 compare/capture A interrupts</p> <p>Timer 12 compare/capture B interrupts</p>

Timer 13 overflow/underflow interrupts
Timer 13 compare/capture A interrupts
Timer 13 compare/capture B interrupts
Timer 14 underflow interrupts
Timer 15 underflow interrupts
Timer 16 underflow interrupts
Timer 17 underflow interrupts

<Serial Interface>

Serial 0 reception interrupts
Serial 0 transmission interrupts
Serial 1 reception interrupts
Serial 1 transmission interrupts
Serial 2 reception interrupts
Serial 2 transmission interrupts

<PWM>

PWM0 overflow interrupts
PWM0 underflow interrupts
PWM1 overflow interrupts
PWM1 underflow interrupts

<A/D interrupt>

A/D 0 conversion complete interrupt
A/D 0 conversion complete B interrupt
A/D 1 conversion complete interrupt
A/D 1 conversion complete B interrupt
A/D 2 conversion complete interrupt

External interrupts: 9 interrupts

Interrupt pins: IRQ00 to IRQ08

Interrupt detection condition:

Edge (rising edge, falling edge), both edges, High-level detection, Low-level detection
Noise filter's filtering is possible at all conditions.

Timer Counter	8-bit timer	12 sets
	16-bit timer	6 sets

Timer 0 (8-bit timer for general use)

- Interval timer, Timer pulse output, Event count
- Count clock source
IOCLK, IOCLK/8, IOCLK/32, IOCLK/128, Timer 1 underflow,
Timer 2 underflow

Timer 1 (8-bit timer for general use)

- Interval timer, Timer pulse output, Event count,
Cascade connection function
- Count clock source
IOCLK, IOCLK/8, IOCLK/32, Timer 0 underflow,
Timer 2 underflow, TM1IO pin input

Timer 2 (8-bit timer for general use)

- Interval timer, Timer pulse output, Event count, Cascade connection function
- Count clock source
IOCLK, IOCLK/8, IOCLK/32, IOCLK/128, Timer 0 underflow, Timer 1 underflow,
TM2IO pin input

Timer 3 (8-bit timer for general use)

- Interval timer, Timer pulse output, Event count, Cascade connection function
- Count clock source
IOCLK, IOCLK/8, IOCLK/32, TM3IO pin input,
Timer 0 underflow, Timer 1 underflow, Timer 2 underflow,

Timer 4 (8-bit timer for general use)

- Interval timer, Timer pulse output, Event count,
- Count clock source
IOCLK, IOCLK/8, IOCLK/32, IOCLK/128, TM4IO pin input,
Timer 5 underflow, Timer 6 underflow

Timer 5 (8-bit timer for general use)

- Interval timer, Timer pulse output, Event count, Cascade connection function
- Count clock source
IOCLK, IOCLK/8, IOCLK/32, Timer 4 underflow, Timer 6 underflow, TM5IO pin input

Timer 6 (8-bit timer for general use)

- Interval timer, Cascade connection function
- Count clock source
IOCLK, IOCLK/8, IOCLK/32, IOCLK/128, Timer 4 underflow, Timer 5 underflow

Timer 7 (8-bit timer for general use)

- Interval timer, Timer pulse output, Event count, Cascade connection function
- Count clock source
IOCLK, IOCLK/8, IOCLK/32, TM7IO pin input, Timer 4 underflow,
Timer 5 underflow, Timer 6 underflow,

Timer 8 (16-bit timer for general use)

- Interval timer, Timer pulse output, Event count, PWM output, input capture,
one-shot output, external trigger start
- Count clock source
IOCLK, IOCLK/8, IOCLK/64, Timer 2 underflow,
TM8BIO pin input

Timer 9 (16-bit timer for general use)

- Interval timer, Timer pulse output, Event count, PWM output, input capture,
one-shot output, external trigger start
- Count clock source
IOCLK, IOCLK/8, IOCLK/64, Timer 3 underflow,
TM9BIO pin input

Timer 10 (16-bit timer for general use)

- Interval timer, Timer pulse output, Event count, PWM output, input capture,
one-shot output, external trigger start
- Count clock source
IOCLK, IOCLK/8, Timer 0 underflow, Timer 1 underflow,
TM10BIO pin input

Timer 11 (16-bit timer for general use)

- Interval timer, Timer pulse output, Event count, PWM output,
input capture, one-shot output, external trigger start
- Count clock source
IOCLK, IOCLK/8, Timer 4 underflow, Timer 5 underflow,
TM11IO pin input

Timer 12 (16-bit timer for general use)

- Resolution 10 bits
- Minimum conversion time 1.0 μ sec
- Channels 10 channels (ADIN06 to ADIN15)
- Use of 3 converters allows simultaneous sampling of 3 phases
- A/D conversion start trigger is in synchronization with complementary 3-phase PWM cycle and 16-bit timer

Complementary 3-phase PWM output 2 channels

- Min. resolution: 33.3 nsec
- Triangular and saw-tooth waves output
- Incorporates a dead time insertion circuit
- Can overwrite registers by double buffer during PWM operation
- PWM output protection circuit supporting external interrupts
- Output timing varying function

Serial Interface

3 channels

Serial 0 (Full duplex UART/synchronous serial interface)

Synchronous serial interface

- Overrun error detection
- Transfer clock source
 - 1/2 and 1/16 of timer 14 underflow, 1/2 and 1/16 of timer 15 underflow, and 1/2 and 1/16 of timer 16 underflow, SBT0 pin
- Can be selected as the first bit to be transferred, Any transfer size from 7 to 8 bits can be selected.
- Maximum transfer rate: 3.0 Mbps

Full duplex UART

- Overrun error, and flaming error detection
- Transfer clock source
 - 1/16 of timer 14 underflow, 1/16 of timer 15 underflow, and 1/16 of timer 16 underflow,
- Can be selected as the first bit to be transferred, Any transfer size from 7 to 8 bits can be selected.
- Continuous transmission, reception, and transmission/reception
- Maximum transfer rate: 375 kbps

Serial 1 (Full duplex UART/synchronous serial interface)

Synchronous serial interface

- Parity error, Overrun error detection
- Transfer clock source
 - 1/2 and 1/16 of timer 14 underflow, 1/2 and 1/16 of timer 15 underflow, and 1/2 and 1/16 of timer 16 underflow, SBT1 pin
- Can be selected as the first bit to be transferred, Any transfer size from 7 to 8 bits can be selected.
- Maximum transfer rate: 3.0 Mbps

Full duplex UART

- Parity error, overrun error, and flaming error detection
- Transfer clock source
 - 1/16 of timer 14 underflow, 1/16 of timer 15 underflow, and 1/16 of timer 16 underflow,
- Can be selected as the first bit to be transferred, Any transfer size from 7 to 8 bits can be selected.
- Continuous transmission, reception, and transmission/reception
- Maximum transfer rate: 375 kbps

Serial 2 (Full duplex UART/synchronous serial interface)

Synchronous serial interface

- Overrun error detection
- Transfer clock source
 - 1/2, 1/4, 1/16, and 1/64 of timer 14 underflow,
 - 1/2, 1/4, 1/16, and 1/64 of timer 15 underflow,
 - 1/2, 1/4, 1/16, and 1/64 of timer 16 underflow,
 - IOCLK/2, IOCLK/4, SBT2 pin
- Can be selected as the first bit to be transferred,
 - Any transfer size from 2 to 8 bits can be selected.
- Continuous transmission, reception, and transmission/reception
- Maximum transfer rate: 5.0 Mbps

Full duplex UART

- Parity error, overrun error and framing error detection
- Transfer clock source
 - 1/32, 1/64, 1/256, and 1/1024 of timer 14 underflow,
 - 1/32, 1/64, 1/256, and 1/1024 of timer 15 underflow,
 - 1/32, 1/64, 1/256, and 1/1024 of timer 16 underflow,
 - IOCLK/32, IOCLK/64
- Can be selected as the first bit to be transferred,
 - Any transfer size from 7 to 8 bits can be selected.
- Continuous transmission, reception, and transmission/reception
- Maximum transfer rate: 300 kbps

Regulator incorporates regulator, and use of 5 V power supply is possible

Power Supply Detection (Auto reset circuit)

Detection level 3.6 V to 4.3 V
When power supply voltage is under detection level, reset is generated.

Port / pins	I/O ports	62 pins
	Motor control output	12 pins
	External interrupt	9 pins
	A/D input	16 pins
	Special pins	18 pins
	Reset input pin	1 pin
	Oscillation pin	2 pins
	Test pin	3 pins
	Power pin	10 pins
	N.C. pin	2 pins

Package LQFP80 (14 mm square, 0.65 mm pitch, halogen free)
Code name LQFP080-P-1414E

Panasonic "halogen free" semiconductor products refer to the products made of molding resin and interposer which conform to the following standards.

- Bromine : 900 ppm (Maximum Concentration Value)
- Chlorine : 900 ppm (Maximum Concentration Value)
- Bromine + Chlorine : 1500 ppm (Maximum Concentration Value)

The above-mentioned standards are based on the numerical value described in IEC61249-2-21.
Antimony and its compounds are not added intentionally.

1.3 Pin Description

1.3.1 Pin Configuration

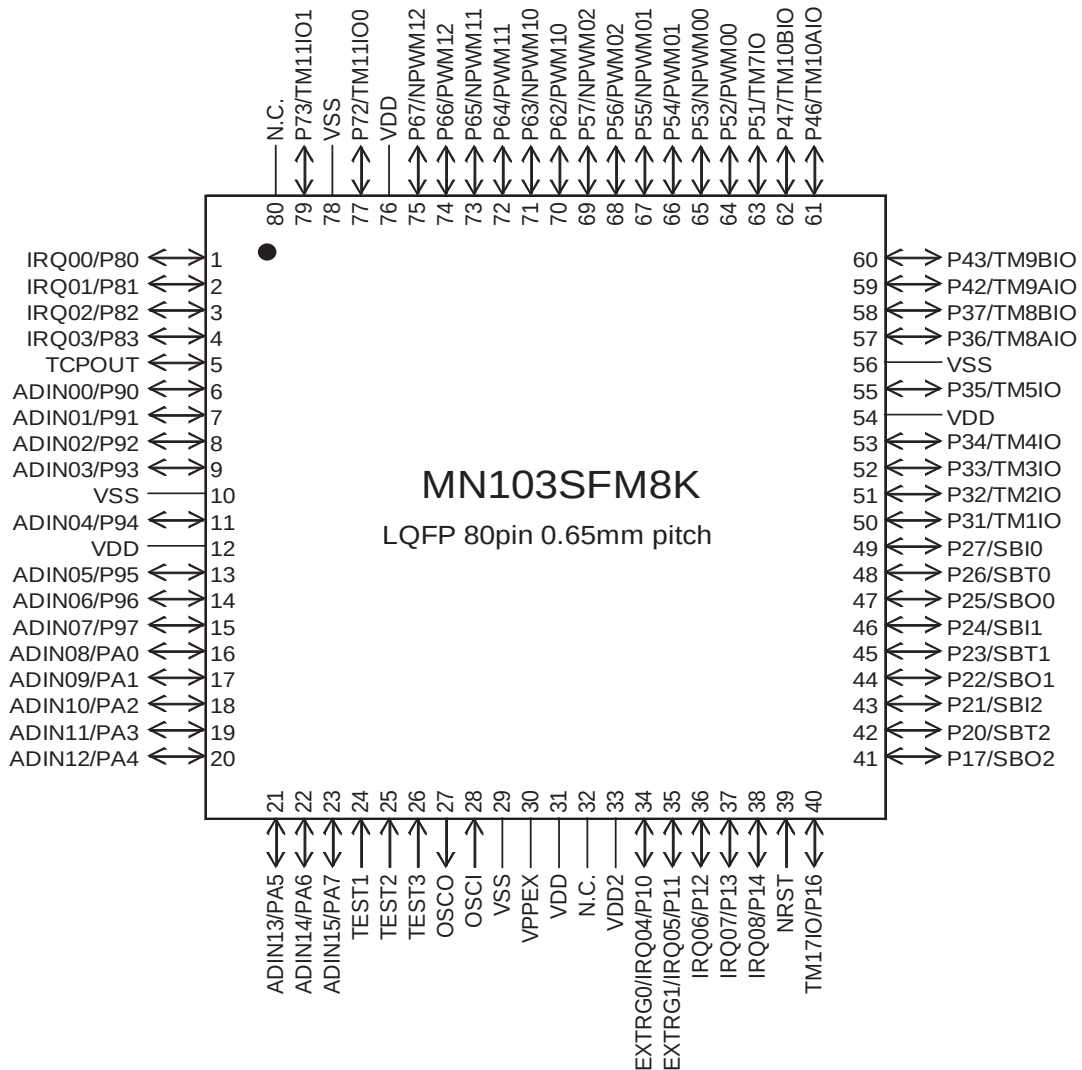


Figure:1.3.1 Pin Configuration

1.3.2 Pin Specification

Table:1.3.1 Pin Specification

Pin	Special functions	I/O	Direction control	Pin control	Function description
NRST	-	in	-	-	Reset input
P10	IRQ04/EXTRG0	in/out	P10D	P10R	External interrupt input 4/ Trigger pin 0 for on-board debugging
P11	IRQ05/EXTRG1	in/out	P11D	P11R	External interrupt input 5/ Trigger pin 1 for on-board debugging
P12	IRQ06	in/out	P12D	P12R	External interrupt input 6
P13	IRQ07	in/out	P13D	P13R	External interrupt input 7
P14	IRQ08	in/out	P14D	P14R	External interrupt input 8
P16	TM17IO	in/out	P16D	P16R	Timer 17 input / output
P17	SBO2	in/out	P17D	P17R	Serial 2 transmission data output
P20	SBT2	in/out	P20D	P20R	Serial 2 clock I/O
P21	SBI2	in/out	P21D	P21R	Serial 2 reception data input
P22	SBO1	in/out	P22D	P22R	Serial 1 transmission data output
P23	SBT1	in/out	P23D	P23R	Serial 1 clock I/O
P24	SBI1	in/out	P24D	P24R	Serial 1 reception data input
P25	SBO0	in/out	P25D	P25R	Serial 0 transmission data output
P26	SBT0	in/out	P26D	P26R	Serial 0 clock I/O
P27	SBI0	in/out	P27D	P27R	Serial 0 reception data input
P31	TM1IO	in/out	P31D	P31R	Timer 1 I/O
P32	TM2IO	in/out	P32D	P32R	Timer 2 I/O
P33	TM3IO	in/out	P33D	P33R	Timer 3 I/O
P34	TM4IO	in/out	P34D	P34R	Timer 4 I/O
P35	TM5IO	in/out	P35D	P35R	Timer 5 I/O
P36	TM8AIO	in/out	P36D	P36R	Timer 8A I/O
P37	TM8BIO	in/out	P37D	P37R	Timer 8B I/O
P42	TM9AIO	in/out	P42D	P42R	Timer 9A I/O
P43	TM9BIO	in/out	P43D	P43R	Timer 9B I/O
P46	TM10AIO	in/out	P46D	P46R	Timer 10A I/O
P47	TM10BIO	in/out	P47D	P47R	Timer 10B I/O
P51	TM7IO	in/out	P51D	P51R	Timer 7 I/O
P52	PWM00	in/out	P52D	P52R	3-phase PWM0 signal output 0
P53	NPWM00	in/out	P53D	P53R	3-phase PWM0 signal reverse output 0
P54	PWM01	in/out	P54D	P54R	3-phase PWM0 signal output 1
P55	NPWM01	in/out	P55D	P55R	3-phase PWM0 signal reverse output 1
P56	PWM02	in/out	P56D	P56R	3-phase PWM0 signal output 2
P57	NPWM02	in/out	P57D	P57R	3-phase PWM0 signal reverse output 2
P62	PWM10	in/out	P62D	P62R	3-phase PWM1 signal output 0
P63	NPWM10	in/out	P63D	P63R	3-phase PWM1 signal reverse output 0
P64	PWM11	in/out	P64D	P64R	3-phase PWM1 signal output 1
P65	NPWM11	in/out	P65D	P65R	3-phase PWM1 signal reverse output 1
P66	PWM12	in/out	P66D	P66R	3-phase PWM1 signal output 2
P67	NPWM12	in/out	P67D	P67R	3-phase PWM1 signal reverse output 2
P72	TM11IO0	in/out	P72D	P72R	Timer 11 I/O 0
P73	TM11IO1	in/out	P73D	P73R	Timer 11 I/O 1
P80	IRQ00	in/out	P80D	P80R	External interrupt input 0
P81	IRQ01	in/out	P81D	P81R	External interrupt input 1
P82	IRQ02	in/out	P82D	P82R	External interrupt input 2
P83	IRQ03	in/out	P83D	P83R	External interrupt input 3
P90	ADIN00	in/out	P90D	P90R	AD analog signal input 0
P91	ADIN01	in/out	P91D	P91R	AD analog signal input 1
P92	ADIN02	in/out	P92D	P92R	AD analog signal input 2
P93	ADIN03	in/out	P93D	P93R	AD analog signal input 3
P94	ADIN04	in/out	P94D	P94R	AD analog signal input 4
P95	ADIN05	in/out	P95D	P95R	AD analog signal input 5
P96	ADIN06	in/out	P96D	P96R	AD analog signal input 6
P97	ADIN07	in/out	P97D	P97R	AD analog signal input 7

Pin	Special functions	I/O	Direction control	Pin control	Function description
PA0	ADIN08	in/out	PA0D	PA0R	AD analog signal input 8
PA1	ADIN09	in/out	PA1D	PA1R	AD analog signal input 9
PA2	ADIN10	in/out	PA2D	PA2R	AD analog signal input 10
PA3	ADIN11	in/out	PA3D	PA3R	AD analog signal input 11
PA4	ADIN12	in/out	PA4D	PA4R	AD analog signal input 12
PA5	ADIN13	in/out	PA5D	PA5R	AD analog signal input 13
PA6	ADIN14	in/out	PA6D	PA6R	AD analog signal input 14
PA7	ADIN15	in/out	PA7D	PA7R	AD analog signal input 15

1.3.3 Pin Functions

Table:1.3.2 Pin Functions

Name	TQFP 48 Pin No.	I/O	Other Function	Function	Description
VDD VDD VDD VDD	12 31 54 76	-	-	Power supply pin	Power pins for 5 V, digital IO Apply 5 V to all of pins and connect capacitor of over 10 μ F between all of the VDD and VSS pins. It is recommended that total capacitance between all of the VDD and VSS is more than 10-times capacitance between all of the VDD2 and VSS.
VDD2	33	-	-	Power supply pin	Power pins for 1.8 V, digital IO Connect capacitor of over 1 μ F between all of the VDD2 and VSS pins.
VSS VSS VSS VSS	10 29 56 78	-	-	Power supply pin	GND for digital
VPPEX	30	-		Power supply pin	Power for flash EEPROM Connect with VDD.
OSC1 OSC0	28 27	input output	-	Clock input pin Clock output pin	Extend ceramic or crystal oscillators or input a clock to OSC1.
NRST	39	input	-	Reset pins (negative logic)	This pin resets the chip when power is turned on and contains an internal pull-up resistor. Setting this pin "L" level initializes the internal state of the device. Thereafter, setting the input to "H" level releases the reset. The hardware waits for the system clock to stabilize, and processes the reset interrupt. Connect capacitor of over 0.1 μ F between NRST and VSS pins.
P10 P11 P12 P13 P14 P16 P17	34 35 36 37 38 40 41	I/O	IRQ04/ EXTRG0 IRQ05/ EXTRG1 IRQ06 IRQ07 IRQ08 TM7IO SBO2	I/O port 1	7-bit CMOS I/O ports. Each bit can be set individually as either input or output by the P1DIR register. Pull-up resistor for each bit can be selected individually by the P1PLU register. At reset, the input mode (P10 to P14, P16, P17) is selected, and pull-up resistor is disabled.
P20 P21 P22 P23 P24 P25 P26 P27	42 43 44 45 46 47 48 49	I/O	SBT2 SBI2 SBO1 SBT1 SBI1 SBO0 SBT0 SBI0	I/O port 2	8-bit CMOS I/O ports. Each bit can be set individually as either input or output by the P2DIR register. Pull-up resistor for each bit can be selected individually by the P2PLU register. At reset, the input mode (P20 to P27) is selected, and pull-up resistor is disabled.
P31 P32 P33 P34 P35 P36 P37	50 51 52 53 55 57 58	I/O	TM1IO TM2IO TM3IO TM4IO TM5IO TM8AIO TM8BIO	I/O port 3	7-bit CMOS I/O ports. Each bit can be set individually as either input or output by the P3DIR register. Pull-up resistor for each bit can be selected individually by the P3PLU register. At reset, the input mode (P31 to P37) is selected, and pull-up resistor is disabled.

Name	TQFP 48 Pin No.	I/O	Other Function	Function	Description
P42 P43 P46 P47	59 60 61 62	I/O	TM9AIO TM9BIO TM10AIO TM10BIO	I/O port 4	4-bit CMOS I/O port. Each bit can be set individually as either input or output by the P4DIR register. Pull-up resistor for each bit can be selected individually by the P4PLU register. At reset, the input mode (P42, P43, P46, P47) is selected and pull-up resistor is disabled.
P51 P52 P53 P54 P55 P56 P57	63 64 65 66 67 68 69	I/O	TM7IO PWM00 NPWM00 PWM01 NPWM01 PWM02 NPWM02	I/O port 5	7-bit CMOS I/O ports. Each bit can be set individually as either input or output by the P5DIR register. Pull-up resistor for each bit can be selected individually by the P5PLU register. At reset, the input mode (P51 to P57) is selected, and pull-up resistor is disabled.
P62 P63 P64 P65 P66 P67	70 71 72 73 74 75	I/O	PWM10 NPWM10 PWM11 NPWM11 PWM12 NPWM12	I/O port 6	6-bit CMOS I/O ports. Each bit can be set individually as either input or output by the P6DIR register. Pull-up resistor for each bit can be selected individually by the P6PLU register. At reset, the input mode (P62 to P67) is selected, and pull-up resistor is disabled.
P72 P73	77 79	I/O	TM11IO0 TM11IO1	I/O port 7	2-bit CMOS I/O ports. Each bit can be set individually as either input or output by the P7DIR register. P pull-up resistor for each bit can be selected individually by the P7PLU register. At reset, the input mode (P72, P73) is selected, and pull-up resistor is disabled.
P80 P81 P82 P83	1 2 3 4	I/O	IRQ00 IRQ01 IRQ02 IRQ03	I/O port 8	4-bit CMOS input ports. Each bit can be set individually as either input or output by the P8PLU register. Pull-up resistor for each bit can be selected individually by the P8PLU register. At reset, the input mode (P80 to P83) is selected, and pull-up resistor is disabled.
P90 P91 P92 P93 P94 P95 P96 P97	6 7 8 9 11 13 14 15	I/O	ADIN00 ADIN01 ADIN02 ADIN03 ADIN04 ADIN05 ADIN06 ADIN07	I/O port 9	8-bit CMOS input ports. Each bit can be set individually as either input or output by the P9DIR register. Pull-up resistor for each bit can be selected individually by the P9PLU register. At reset, the input mode (P90 to P97) is selected, and pull-up resistor is disabled.
PA0 PA1 PA2 PA3 PA4 PA5 PA6 PA7	16 17 18 19 20 21 22 23	I/O	ADIN08 ADIN09 ADIN10 ADIN11 ADIN12 ADIN13 ADIN14 ADIN15	I/O port A	8-bit CMOS input ports. Each bit can be set individually as either input or output by the PADIR register. Pull-up resistor for each bit can be selected individually by the PAPLU register. At reset, the input mode (PA0 to PA7) is selected, and pull-up resistor is disabled.
SB00 SB01 SB02	47 44 41	Output	P25 P22 P17	Serial interface transmission data output pin	Transmission data output pins for serial interface 0, 1, and 2. Select output by the P1DIR and P2DIR registers and serial pin function by the P1MD and P2MD registers. These can be used as normal I/O pins when serial interfaces are not used.

Name	TQFP 48 Pin No.	I/O	Other Function	Function	Description
SBI0 SBI1 SBI2	49 46 43	Input	P27 P24 P21	Serial interface reception data input pin	Reception data input pins for serial interface 0, 1, and 2. Pull-up resistor can be selected by the P2PLU register. Select input by the P2DIR register. These can be used as normal I/O pins when serial interfaces are not used.
SBT0 SBT1 SBT2	48 45 42	I/O	P26 P23 P20	Serial interface clock I/O pin	Clock I/O pins for serial interface 0, 1, and 2. Pull-up resistor can be selected by the P2PLU register. Select either input or output by the P2DIR register and serial pin function by the P2MD register. These can be used as normal I/O pins when serial interfaces are not used.
TM1IO TM2IO TM3IO TM4IO TM5IO TM7IO TM17IO	50 51 52 53 55 63 40	I/O	P31 P32 P33 P34 P35 P51 P16	Timer I/O pin	Event counter input and timer pulse output pins for 8-bit timer 1 to 5, 7 and 17. At event count input, input mode can be selected by the P1, 3 and 5DIR registers. At input mode, pull-up resistor can be selected by the P1, 3 and 5PLU registers. At timer pulse output, selected timer output pins by the P1,3 and 5MD registers and set output mode by the P1,3 and 5DIR registers. These can be used as normal I/O pins when these are not used as timer I/O pins.
TM8AIO TM8BIO TM9AIO TM9BIO TM10AIO TM10BIO TM11IO0 TM11IO1	57 58 59 60 61 62 77 79	I/O	P36 P37 P42 P43 P46 P47 P72 P73	Timer I/O pin	Event counter input, timer output, and PWM output pins for 16-bit timer 8 to 11. At event count input, input mode can be selected by the P3, 4, and 7DIR registers. At input mode, pull-up resistor can be selected by the P3, 4, and 7PLU register. At timer output and PWM output, select timer output pins by the P3, 4, and 7MD registers, and set output mode by the P3, 4, and 7DIR register. These can be used as normal I/O pins when these are not used as timer I/O pins.
TM11IO0 TM11IO1	77 79	Output	P72 P73	PWM output pin	Motor control PWM signal output pins for 16-bit timer 11. These output PWM signals for 16-bit timer 11 to 2 pins simultaneously. At PWM output, select timer output pin by the P7MD register and set to output mode by the P7DIR register. These can be used as normal I/O pins when these are not used as timer I/O pins.
ADIN00 ADIN01 ADIN02 ADIN03 ADIN04 ADIN05 ADIN06 ADIN07 ADIN08 ADIN09 ADIN10 ADIN11 ADIN12 ADIN13 ADIN14 ADIN15	6 7 8 9 11 13 14 15 16 17 18 19 20 21 22 23	Input	P90 P91 P92 P93 P94 P95 P96 P97 PA0 PA1 PA2 PA3 PA4 PA5 PA6 PA7	Analogue input pin	Analogue input pins for 16-channel, 10-bit 3 A/D converters. These can be used as normal I/O pins when these are not used as analog input.

Name	TQFP 48 Pin No.	I/O	Other Function	Function	Description
IRQ00 IRQ01 IRQ02 IRQ03 IRQ04 IRQ05 IRQ06 IRQ07 IRQ08	1 2 3 4 34 35 36 37 38	Input	P80 P81 P82 P83 P10/ EXTRG0 P11/ EXTRG1 P12 P13 P14	External interrupt pin	External interrupt input pins. The valid edge can be selected. Set whether both edges are detected or not by the edge detection register (IRQEDGESEL). When it is set not to detect both edges, select rising edge, falling edge, H level, or L level by the external interrupt condition specification register (EXTMD0 and EXTMD1). When it is set to detect both edges, select rising edge by the external interrupt condition setting register.
PWM00 PWM01 PWM02 PWM10 PWM11 PWM12	64 66 68 70 72 74	Output	P52 P54 P56 P62 P64 P66	Motor control PWM signal output pin	Motor control 3-phase PWM signal output pins. Select PWM signal output pins by the P5MD and P6MD registers and set PWM output by the PWM off registers. These can be used as normal I/O pins when these are not used as PWM signal output pins.
NPWM00 NPWM01 NPWM02 NPWM11 NPWM12 NPWM13	65 67 69 71 73 75	Output	P53 P55 P57 P63 P65 P67	Motor control PWM signal reverse output pin	Motor control 3-phase PWM signal revers output pins. Select PWM signal output pins by the P5MD and P6MD registers and set PWM output by the PWM off registers. These can be used as normal I/O pins when these are not used as PWM signal output pins.
TCPOUT	5	Input	-	Test signal input	Test signal input pin. Fix at VSS.
TEST1 TEST2 TEST3	24 25 26	Input	-	Test signal input	Test signal input pins built-in pull-up resistor. Pull-up with resistor of over 1 kΩ.



VPPEX is power supply for flash EEPROM rewriting. Its potential should be the same as VDD.

1.4 Block Diagram

1.4.1 Block Diagram

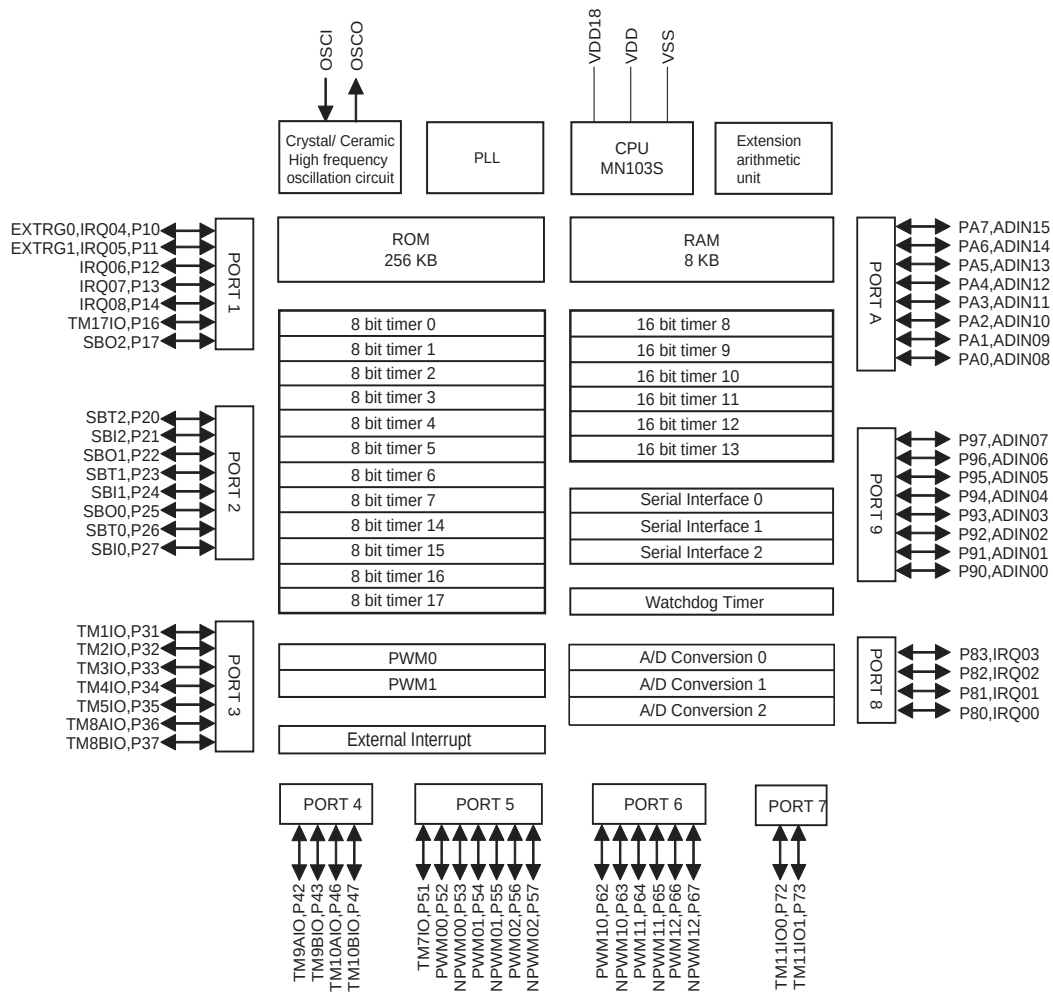


Figure:1.4.1 Block Diagram

1.5 Electrical Characteristics

This LSI manual describes the standard specification.

Electrical characteristics given in this section are preliminary and subject to change without notice. When using LSI, contact our sales office for product specifications.

Model	CMOS LSI
Application	General-purpose
Function	CMOS 32-bit 1 chip microcontroller

1.5.1 Absolute Maximum Ratings

$V_{SS}=0.0\text{ V}$

	Parameter	Symbol	Rating	Unit
A1	External supply voltage	V_{DD}	-0.3 to +7.0	V
A2	Internal supply voltage	V_{DD2}	-0.3 to +2.5	V
A3	Input pin voltage	V_{I1}	-0.3 to V_{DD} +0.3 (upper limit: 7.0)	V
A4	I/O pin voltage	V_{IO}	-0.3 to V_{DD} +0.3 (upper limit: 7.0)	V
A5	Peak output current	I_{OPEAK}	± 15	mA
A6	Typ. range output current	I_{OAVG}	± 8	mA
A7	Operating ambient temperature	T_{OPR}	-40 to +85	°C
A8	Storage temperature	T_{STG}	-40 to +125	°C
A9	Power dissipation	P_D	500	mW

Note: The absolute maximum ratings are the limit values beyond which the LSI may be damaged. It is not guarantee the operation in these conditions. The rating of the average output current is applied for the period of any 100 ms.

Note: It cannot supply the internal power supply voltage to a circuit except this LSI.

1.5.2 Operating Conditions

$V_{SS}=0.0\text{ V}$
 $T_a=-40\text{ }^{\circ}\text{C to }+85\text{ }^{\circ}\text{C}$

Parameter	Symbol	Conditions	Limits			Unit
			Min.	Typ.	Max.	
B1	External supply voltage1	V_{DD}	V_{RST}	5.0	5.5	V

Note) For power supply detection level V_{RST} , refer to "Auto reset circuit characteristics".

$V_{DD} = V_{RST} \text{ to } 5.5\text{ V}$
 $V_{SS} = 0.0\text{ V}$
 $T_a=-40\text{ }^{\circ}\text{C to }+85\text{ }^{\circ}\text{C}$

Oscillation

Parameter	Symbol	Conditions	Limits			Unit
			Min.	Typ.	Max.	
B2	Input frequency	F_{OSC}	5.0	-	15	MHz
B3	Internal feedback resistor	R_{FB}	-	1.2	-	$M\Omega$

Note) Capacity value differs depending on oscillators to be used. Consult the oscillator manufacture for the appropriate circuit constant.

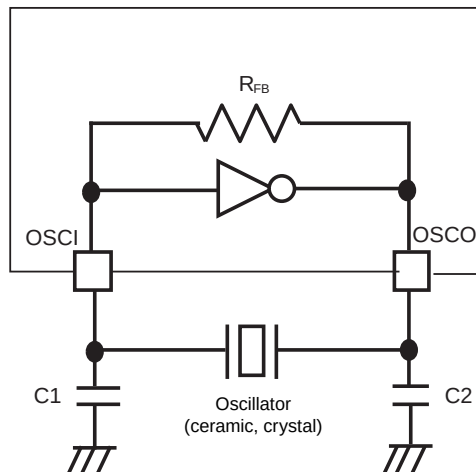


Figure:1.5.1 Oscillation

$V_{DD} = 5.0\text{ V}$
 $V_{SS} = 0.0\text{ V}$
 $T_a = -40\text{ }^{\circ}\text{C to } +85\text{ }^{\circ}\text{C}$

Parameter		Symbol	Conditions	Limits			Unit
				Min.	Typ.	Max.	
External clock input 1 OSCI (OSCO left open)							
B4	Clock frequency	Fcp	-	5.0	-	15.0	MHz
B5	High-level pulse width	twh1	Figure:1.5.2	25.0	-	-	ns
B6	Low-level pulse width	twl1		25.0	-	-	ns
B7	Rise time	twr1	Figure:1.5.2	-	-	5.0	ns
B8	Fall time	twf1		-	-	5.0	ns

Note: Be sure that the clock duty ratio is 45 % to 55 %.

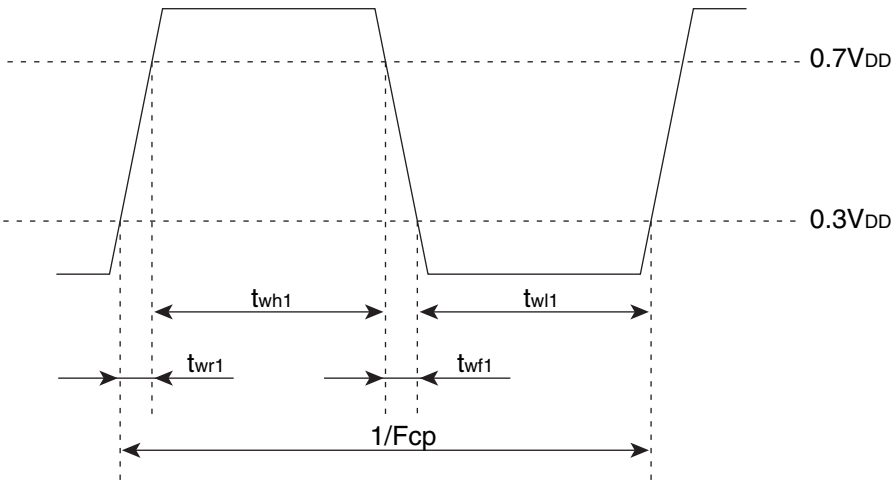


Figure:1.5.2 OSCI Timing Chart

1.5.3 DC Characteristics

DC Characteristics

$V_{SS}=0.0\text{ V}$
 $T_a=-40\text{ }^{\circ}\text{C to }+85\text{ }^{\circ}\text{C}$
Output pin left open

Parameter		Symbol	Conditions	Limits		Unit
				Typ.	Max.	
C1	Power supply current in NORMAL mode	I_{DD1}	$V_{DD} = 5.0\text{ V}$ $F_{OSC} = 10\text{ MHz}$ PLL is used. MCLK= 60 MHz, IOCLK =30 MHz Peripheral circuits are stopped.	20	-	mA
C2		I_{DD2}	$V_{DD} = 5.0\text{ V}$ $F_{OSC} = 10\text{ MHz}$ PLL is used. MCLK= 60 MHz, IOCLK =30 MHz Peripheral circuits are operating.	-	35	mA

$V_{DD} = 5.0\text{ V}$
 $V_{SS} = 0.0\text{ V}$
 $T_a=-40\text{ }^{\circ}\text{C to }+85\text{ }^{\circ}\text{C}$

Parameter		Symbol	Conditions	Limits			Unit
				Min.	Typ.	Max.	
Input pins1 NRST, TEST1, TEST2							
C3	Input voltage High level	V _{IH1}	-	V _{DD} x 0.7	-	V _{DD}	V
C4	Input voltage Low level	V _{IL1}	-	V _{SS}	-	V _{DD} x 0.3	V
C5	Internal Pull-up resistor	R _{IO1}	V _{DD} =5.0 V, V _{IN} = 0 V	15	30	60	kΩ

$V_{DD} = 5.0\text{ V}$
 $V_{SS} = 0.0\text{ V}$
 $T_a=-40\text{ }^{\circ}\text{C to }+85\text{ }^{\circ}\text{C}$

Parameter		Symbol	Conditions	Limits			Unit
				Min.	Typ.	Max.	
Input pins 2 VPPEX, TEST3							
C6	Input voltage High level	V _{IH2}	-	V _{DD} × 0.7	-	V _{DD}	V
C7	Input voltage Low level	V _{IL2}	-	V _{SS}	-	V _{DD} × 0.3	V

$V_{DD} = 5.0 \text{ V}$
 $V_{SS} = 0.0 \text{ V}$
 $T_a = -40 \text{ }^{\circ}\text{C to } +85 \text{ }^{\circ}\text{C}$

Parameter		Symbol	Conditions	Limits			Unit
				Min.	Typ.	Max.	
I/O pin P10 to P14, P16, P17, P20 to P27, P31 to P37, P42, P43, P46, P47, P51 to P57, P62 to P67, P72, P73, P80 to P83, P85, P90 to P97, PA0 to PA7							
C8	Input voltage High level	V _{IH4}	-	V _{DD} × 0.7	-	V _{DD}	V
C9	Input voltage Low level	V _{IL4}	-	V _{SS}	-	V _{DD} × 0.3	V
C10	Input leak current	I _{LK4}	-	-	-	± 5	μA
C11	Internal pull-up resistor	R _{IO4}	V _{DD} = 5.0 V, V _{IN} = 0 V	15	30	60	kΩ
C12	Output voltage High level	V _{OH4}	V _{DD} = 5.0 V, I _{OH} = -2.5 mA	4.5	-	-	V
C13	Output voltage Low level	V _{OL4}	V _{DD} = 5.0 V, I _{OL0} = 2.5 mA	-	-	0.5	V

1.5.4 Analog Characteristics

A/D0, A/D1, A/D2

$V_{DD} = 5.0 \text{ V}$
 $V_{SS} = 0.0 \text{ V}$
 $T_a = -40^\circ\text{C to } +85^\circ\text{C}$

Parameter		Symbol	Conditions	Limits			Unit
				Min.	Typ.	Max.	
D1	Resolution	-	-	-	-	10	Bits
D2	Non-linearity error	INLE	Sampling time $\geq 150 \text{ ns}$ A/D conversion clock $\leq 30 \text{ MHz}$	-	-	± 2	LSB
D3	Differential linearity error	DNLE		-	-	± 3	LSB
D4	Zero transition voltage	-		-20	-	20	mV
D5	Full-scale transition voltage	-		4980	-	5020	mV
D6	A/D conversion time	-	-	1.0	-	-	μs
D7	Analog input voltage	V_{IA}	-	V_{SS}	-	V_{DD}	V
D8	Analog input leakage current	I_{IA}	Unselected channel $V_{ADIN} = 0 \text{ V to } V_{DD}$	-	-	± 10	μA
D9	Power supply current during operation (VDD pin)	I_{AD}	A/D conversion clock = 30 MHz	-	1	-	mA

Auto-reset

$V_{SS} = 0.0 \text{ V}$
 $T_a = -40^\circ\text{C to } +85^\circ\text{C}$

Parameter		Symbol	Conditions	Limits			Unit
				Min.	Typ.	Max.	
D10	Power supply voltage detection level	V_{RST}	-	3.6	-	4.3	V
D11	Change rate of power supply voltage	ΔV_{DD}	-	0.2	-	-	ms/V

Note: Connect 0.1 μF capacitor between NRST and VSS pins. .

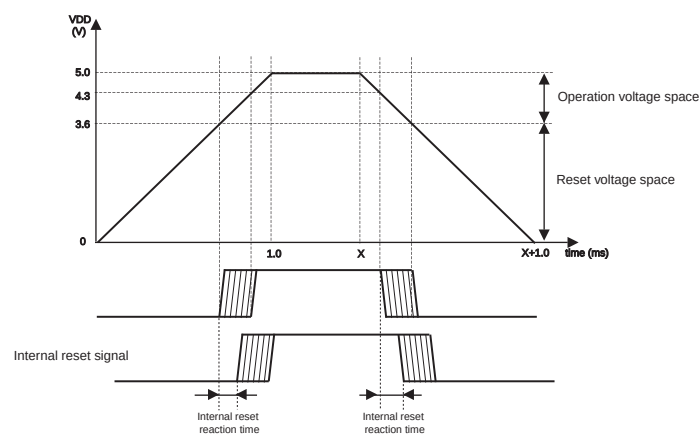


Figure:1.5.3 Auto Reset Circuit Characteristics

1.5.5 AC Characteristics

Reset signal input timing

$V_{DD} = 5.0\text{ V}$
 $V_{SS} = 0.0\text{ V}$
 $T_a = -40\text{ }^{\circ}\text{C to } +85\text{ }^{\circ}\text{C}$

Parameter		Symbol	Conditions	Limits			Unit
				Min.	Typ.	Max.	
E1	Reset signal pulse width (NRST)	t_{NRSTW}	-	1	-	-	μs

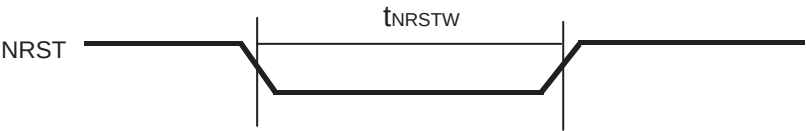


Figure:1.5.4 Reset Signal Pulse Width

1.5.6 Flash EEPROM E/W Characteristics

$V_{SS} = 0.0 \text{ V}$

Parameter		Symbol	Conditions	Limits			Unit
				MIN	TYP	MAX	
F1	Power supply voltage at E/W	V_{DDEW}		V_{RST}	-	5.5	V
F2	Ambient temperature at E/W	V_{OPREW}		-40	-	85	°C
F3	Permissible rewriting times	E_{MAX1}	Large sector (32 KB)	1,000	-	-	Times
F4	Permissible rewriting times	E_{MAX2}	Small sector (8 KB)	100,000	-	-	Times
F5	Data retention time	T_{HOLD}		10	-	-	Years

1.6 Package Dimension

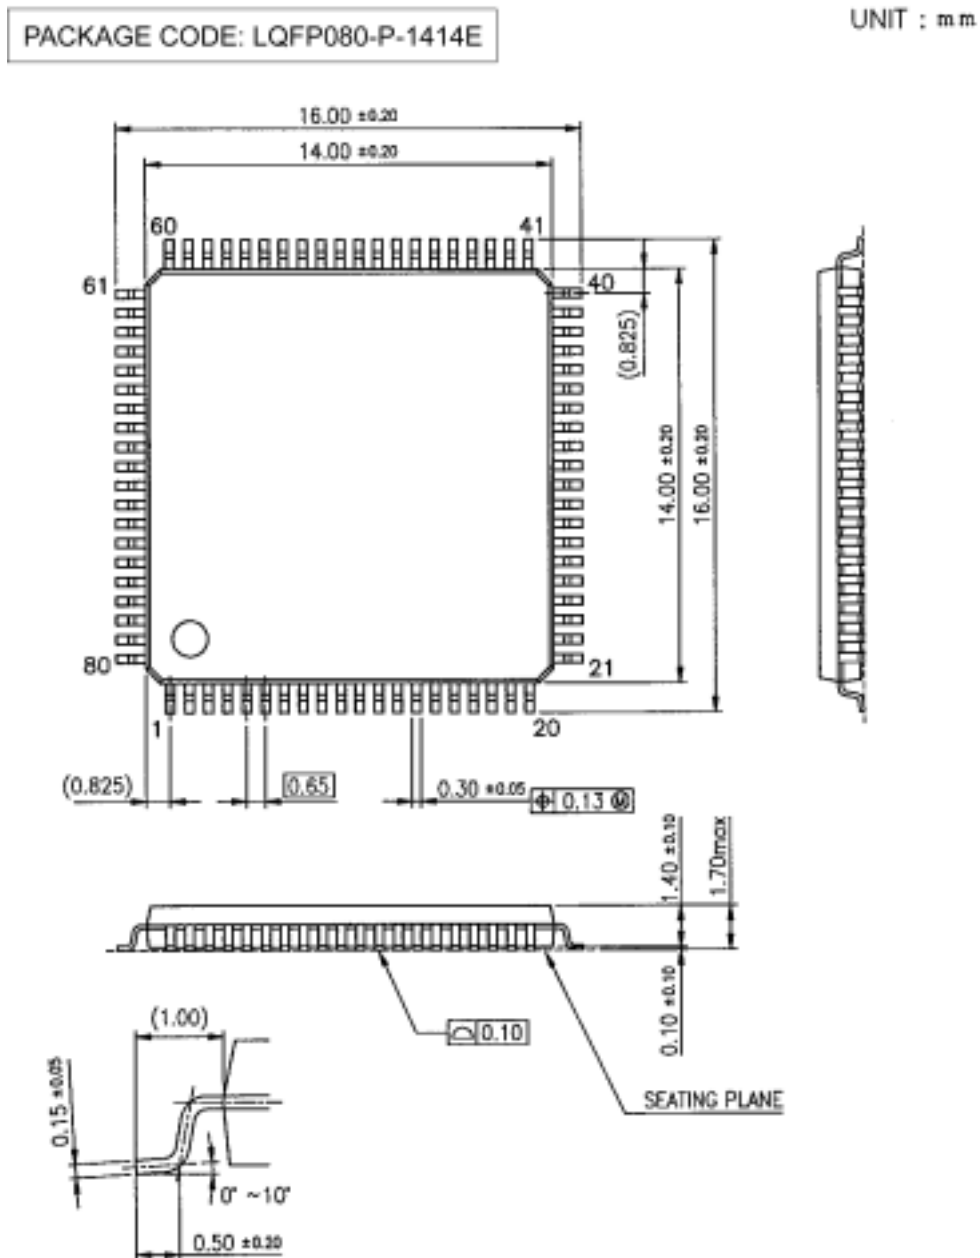


Figure:1.6.1 Package Dimension



The external dimensions of the package are subject to change. Before using this product, please obtain product specifications from the sales offices.

**Request for your special attention and precautions in using the technical information and
semiconductors described in this book**

- (1) If any of the products or technical information described in this book is to be exported or provided to non-residents, the laws and regulations of the exporting country, especially, those with regard to security export control, must be observed.
- (2) The technical information described in this book is intended only to show the main characteristics and application circuit examples of the products. No license is granted in and to any intellectual property right or other right owned by Panasonic Corporation or any other company. Therefore, no responsibility is assumed by our company as to the infringement upon any such right owned by any other company which may arise as a result of the use of technical information described in this book.
- (3) The products described in this book are intended to be used for general applications (such as office equipment, communications equipment, measuring instruments and household appliances), or for specific applications as expressly stated in this book.
Consult our sales staff in advance for information on the following applications:
 - Special applications (such as for airplanes, aerospace, automotive equipment, traffic signaling equipment, combustion equipment, life support systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.It is to be understood that our company shall not be held responsible for any damage incurred as a result of or in connection with your using the products described in this book for any special application, unless our company agrees to your using the products in this book for any special application.
- (4) The products and product specifications described in this book are subject to change without notice for modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (5) When designing your equipment, comply with the range of absolute maximum rating and the guaranteed operating conditions (operating power supply voltage and operating environment etc.). Especially, please be careful not to exceed the range of absolute maximum rating on the transient state, such as power-on, power-off and mode-switching. Otherwise, we will not be liable for any defect which may arise later in your equipment.
Even when the products are used within the guaranteed values, take into the consideration of incidence of break down and failure mode, possible to occur to semiconductor products. Measures on the systems such as redundant design, arresting the spread of fire or preventing glitch are recommended in order to prevent physical injury, fire, social damages, for example, by using the products.
- (6) Comply with the instructions for use in order to prevent breakdown and characteristics change due to external factors (ESD, EOS, thermal stress and mechanical stress) at the time of handling, mounting or at customer's process. When using products for which damp-proof packing is required, satisfy the conditions, such as shelf life and the elapsed time since first opening the packages.
- (7) This book may be not reprinted or reproduced whether wholly or partially, without the prior written permission of our company.