NEOCENE 2T1014 | SPECIFICATION




SUMMARY


∅10 2T1014 series step motor assembled by 2 units of ∅10 2T1013 series, in the same diameter but provide more torque than 2T1013 series

USES

Hand-held POS machines, photo printers, LCD screen color calibration sticks, desktop gaming computers, and medical blood pump devices

➢ DIMENSIONS：

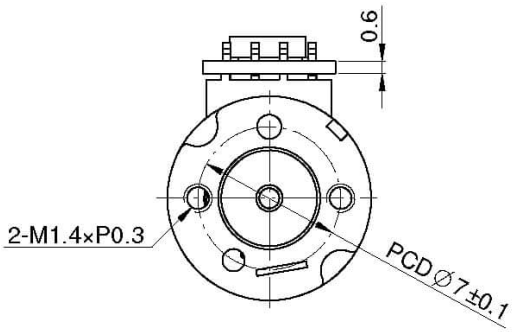

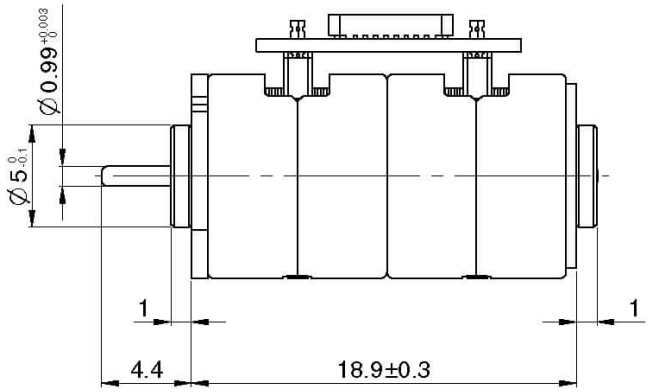

NEOCENE 2T1014 | SPECIFICATION

Item	2T1014
Standard voltage	12V
Standard Current	400 mA/Phase
Number of phase	4 Phase
Step angles	18° / Step
Excitation	1-2 Bipolar
Pull-out torque	10 g-cm or more / 5000 pps
Pull-in torque	15 g-cm or more / 1000 pps
Holding torque	32 g-cm or more
Resistance per phase	15 Ω
Max pull-out pulse rate	6000 pps or more
Max pull-in pulse rate	2000 pps or more

➢ CHARACTERISTICS：

12V

