


环保物料

TEL:0769-82001899

技术特性/Specifications:
 额定电流 Rated current: 3A AC\DC
 额定电压 Rated voltage: 250V AC\DC
 接触电阻 Contact resistace:20mΩ max
 绝缘电阻 Insulation resistance:1000MΩ min
 耐压 Withstand voltage: 1000V AC/ minute
 环境温度 Ambient temperature: -25℃ to 85℃
 材料/Matetials:尼龙 (Nylon) UL94-V0(2)

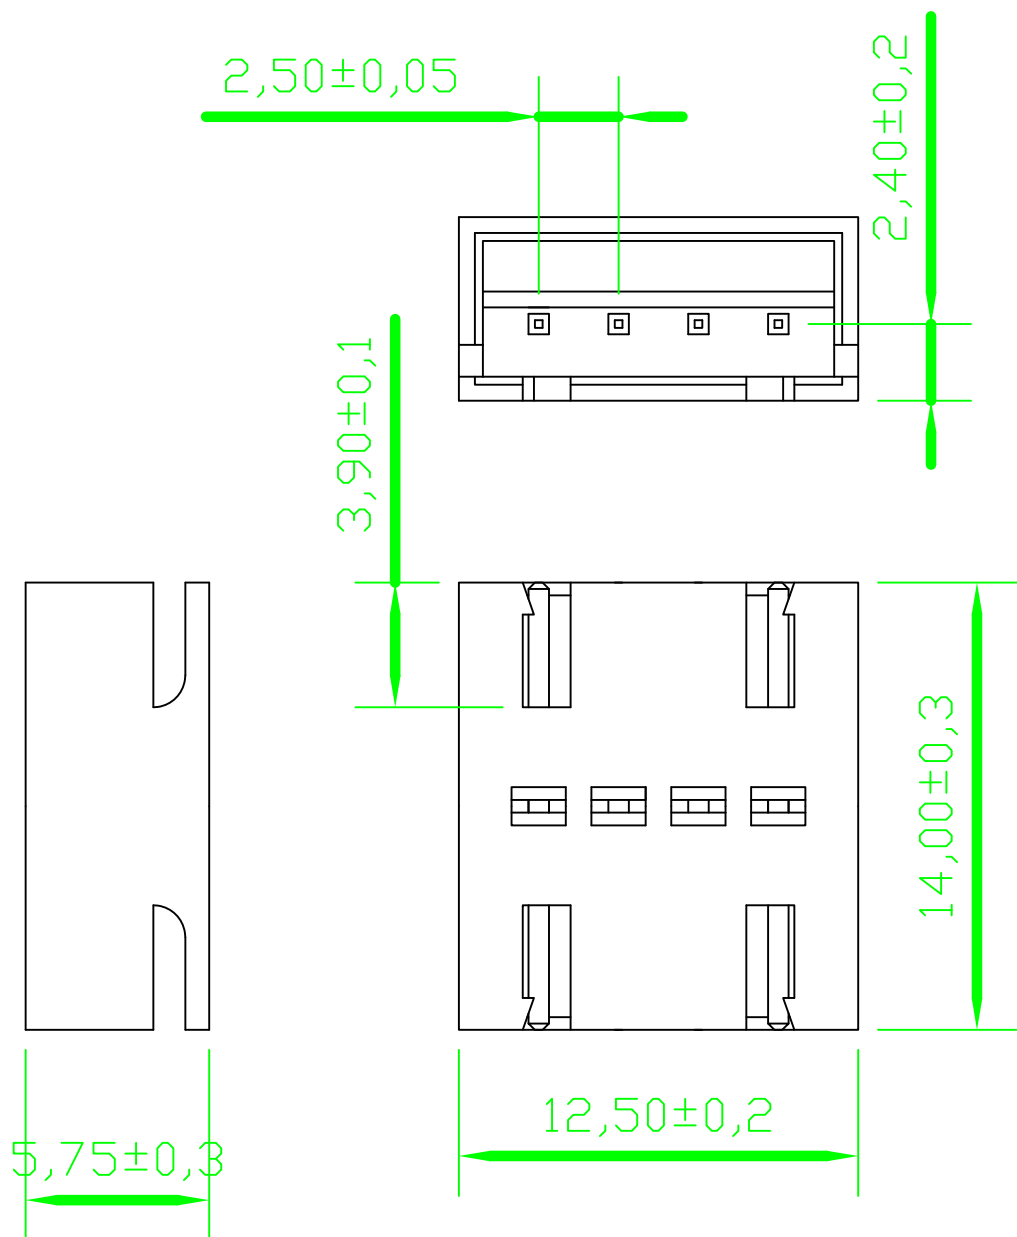

				TOLERANCE UNLESS OTHERWISE		DRAWN	CK tan	XFCN兴飞连接器有限公司 CONNECTORS XFCN CONNECTORS CO., LTD.		SHEET	1/1
				X.	±0.30	X°	±5°			CHKD	DATE
				.X	±0.20	.X°	±2°	APPD	PRODUCT NAME	2.50mm Crimp Style Connectors	
				.XX	±0.08	.XX°	±1°	VIEW	PART. NO.	SCALE	1:1
				.XXX	±0.03	.XXX°	±0.5°			DWG. NO.	009
A0	MODIFICATION	DRAW	DATE								