


SHEET 1 OF 1

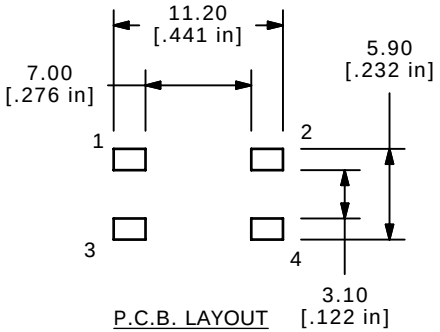


P.C.B. LAYOUT

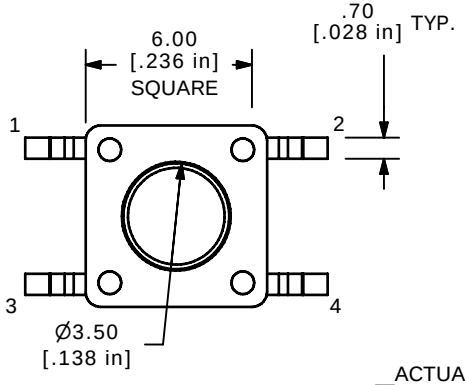




ISOMETRIC



CIRCUIT DIAGRAM

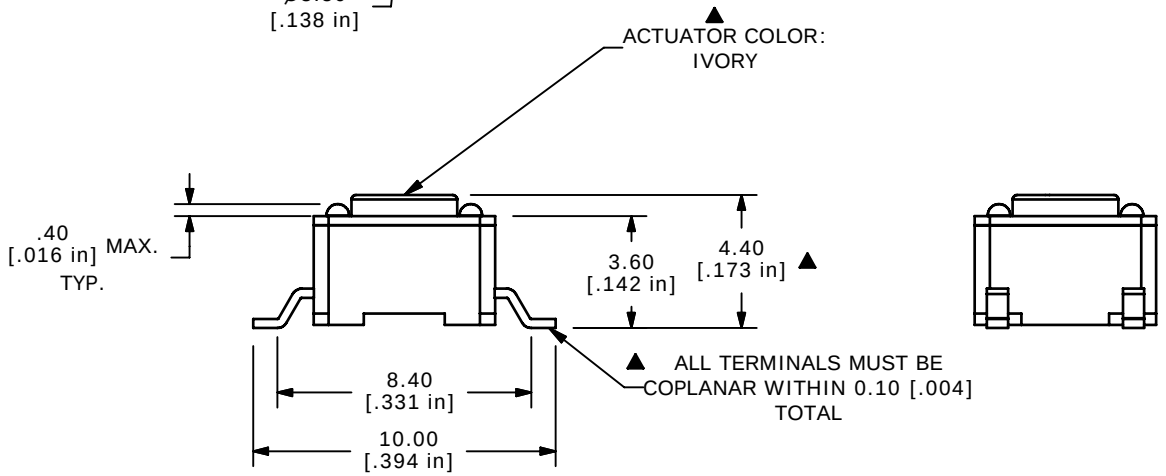

NOTES:
1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X= ±0.4
   X.XX= ±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 50VDC, 50mA
▲5. OPERATING FORCE: 260 ±50 gms
6. TRAVEL: 0.25mm =0.2/0.1mm
7. CONTACT RESISTANCE: 100 MILLI OHMS MAX. (INITIAL)
8. MECHANICAL/ELECTRICAL LIFE 100,000 CYCLES MIN.
▲ 9. SILVER CONTACTS
▲10. PACKAGE: TAPE AND REEL, 1200 PIECES PER REEL
11. 2002/95/EC (ROHS) COMPLIANT
12. ▲ DENOTES CRITICAL PARAMETER

REV	PCR NO	DESCRIPTION	DATE	BY
E	20772	REVISED AND REDRAWN	9/25/12	rc

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE TL3301NF260QG

SCALE	DATE	DR	DWG	REV
4:1	9/25/2012	rc	P010517	E