



ES3A THRU ES3M

SURFACE MOUNT RECTIFIER

50V-1000V 3.0A


FEATURES

- Low cost
- Low leakage
- Low forward voltage drop
- High current capability
- Easily cleaned with Alcohol, Isopropanol and similar solvents
- The plastic material carries U/L recognition 94V-0

MECHANICAL DATA

Case: JEDEC DO-214AA, molded plastic
 Terminals: Solderable per MIL- STD-202, Method 208
 Polarity: Color band denotes cathode
 Weight: 0.007 ounces, 0.21 grams
 Mounting position: Any

DO-214AA(SMB)

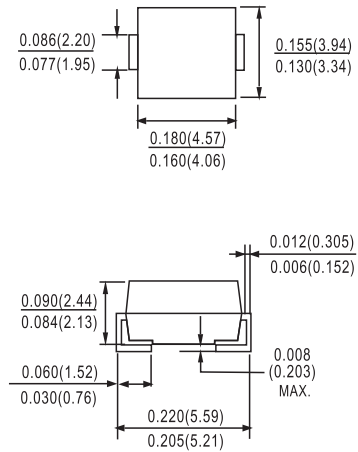

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.
 Single phase, half wave ,60Hz, resistive or inductive load.
 For capacitive load, derate current by 20%

CHARACTERISTICS	SYMBOL	ES3A	ES3B	ES3D	ES3G	ES3J	ES3K	ES3M	UNIT	
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V	
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	V	
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V	
Maximum Average Forward Rectified Current @T _A =55 °C	I _(AV)	3.0							A	
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load(JEDEC Method)	I _{FSM}	125							A	
Peak Forward Voltage at 3.0A DC	V _F	0.95		1.25		1.70			V	
Maximum DC Reverse Current at Rated DC Blocking Voltage @T _J =25°C @T _J =100°C	I _R	5.0 100							μA	
Maximum Reverse Recovery Time(Note 1)	T _{RR}	35							nS	
Typical Junction Capacitance (Note2)	C _J	70				45				pF
Typical Thermal Resistance (Note3)	R _{JA}	20							°C/W	
Operating Temperature Range	T _J	-55 to +150							°C	
Storage Temperature Range	T _{STG}	-55 to +150							°C	

NOTES: 1.Measured with I_F=0.5A, I_R=1A, I_{RR}=0.25A

2.Measured at 1.0 MHz and applied reverse voltage of 4.0V DC

3.Thermal resistance junction to ambient.



ES3A THRU ES3M

SURFACE MOUNT RECTIFIER

50V-1000V 3.0A

RATINGS AND CHARACTERISTIC CURVES ES3A THRU ES3M

FIG.1 - FORWARD CURRENT DERATING CURVE

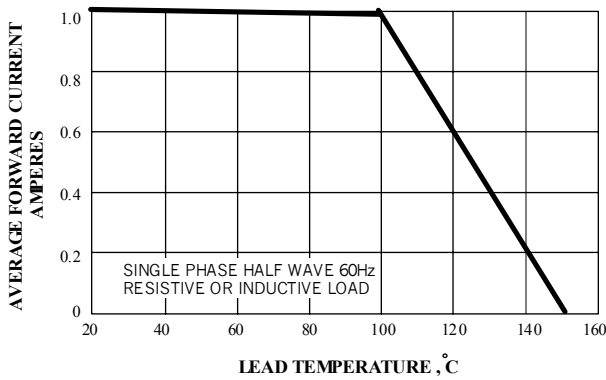


FIG.2 - MAXIMUM NON-REPETITIVE SURGE CURRENT

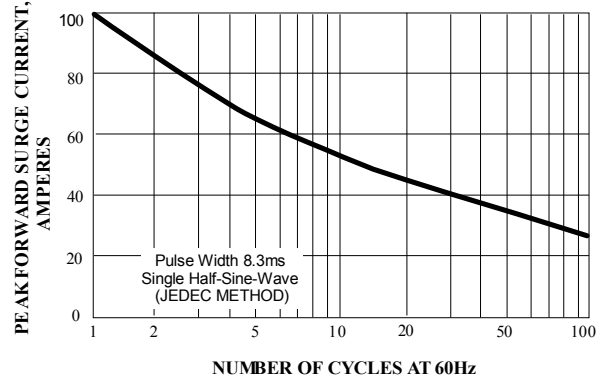


FIG.3 - TYPICAL FORWARD CHARACTERISTICS

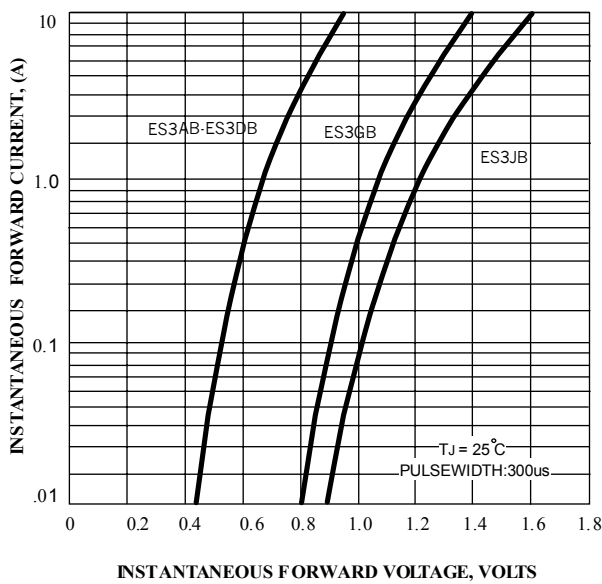


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

