E-pHEMT AE308

Product Features

- 50MHz ~ 1GHz
- GaAs E-pHEMT
- 22dB Gain
- 2.0 dB Noise Figure
- +18.0 dBm P1dB
- SOT-89 SMT Package
- Single +5V Supply
- Pb Free / RoHS Standard

Application

- CATV Amplifier



Package Type: SOT-89

Description

AE308 is used from 50MHz to 1GHz frequencies and GaAs E-pHEMT in a low cost SOT-89 package.
The package is SOT-89, which is pin-to-pin compatible with industry standard.

Specifications

* V_{dc} = 5V; T_{case} = 25℃; Z_S = Z_L = 75Ω

Parameter		Units	Min	Typ	Max	Condition
Frequency Range		MHz	50MHz		1GHz	
Supply Voltage		V		5		Vdc=5V
Current		mA	40	55	70	
S21-Gain		dB		22		50MHz~1GHz
S11-Input Return Loss		dB		-15		
S22-Output Return Loss		dB		-15		
OIP3		dBm	27	29		
P1dB		dBm	17	19		50MHz~500MHz
		dBm	15	17		500MHz~1GHz
OIP2		dBc	37	45	54	50MHz~1GHz
Noise Figure		dB		1.5		50MHz~800MHZ
		dB		2		800MHz~1GHz
CSO	50 - 870MHz	dBc		-58		135 channels,+16dBmV/ch,Single
CTB		dBc		-64		135 channels,+16dBmV/ch,Single
XMD		dBc		-67		135 channels,+16dBmV/ch,Single

Typical Performance

Frequency	MHz	50MHz	1GHz
S21-Gain	dB	22	22
S11-Input Return Loss	dB	-15	-15
S22-Output Return Loss	dB	-15	-15
OIP3	dBm	29	28
P1dB	dBm	19	17
OIP2	dBc	45	54
Noise Figure	dB	1.3	2
CSO	dBc	-58	
CTB	dBc	-64	
XMD	dBc	-67	
Supply Voltage	V	5	
Current	mA	40~70	

(1) 135channels, 16dBmV/ch, Single

NOTE

1. Test conditions unless otherwise noted. T=25℃, Vdc=5.0V, 75Ω system
2. OIP3 measured with 2 tones at an output power of 5dBm/tone separated by 1MHz

Absolute Maximum Ratings


PARAMETER	Minimum Rating	Maximum Rating
Operating Case Temperature (℃)	-40	85
Storage Temperature (℃)	-50	125
Drain-Source Voltage (V)		+7

Single – Ended CATV 75Ω Evaluation Circuit : (50MHz ~1GHz)


Typical RF Performance at 25℃

Parameter	Units	Typical		
Frequency	MHz	50	450	1000
S21-Gain	dB	22	22	22
S11-Input Return Loss	dB	-15	-15	-15
S22-Output Return Loss	dB	-15	-15	-15
OIP3	dBm	29	30	28
P1dB	dBm	19	19	17
OIP2	dBc	45	42	54
Noise Figure	dB	1.3	1.5	2
CSO	dBc	-58		
CTB	dBc	-64		
XMD	dBc	-67		
Supply Voltage	V	5		
Current	mA	40~70		


(1) 135channels,+16dBmV/ch,Single

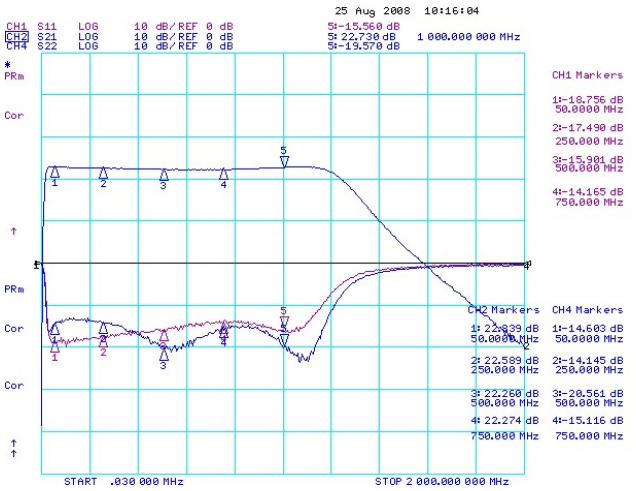

APPLICATION (50MHz~1GHz)

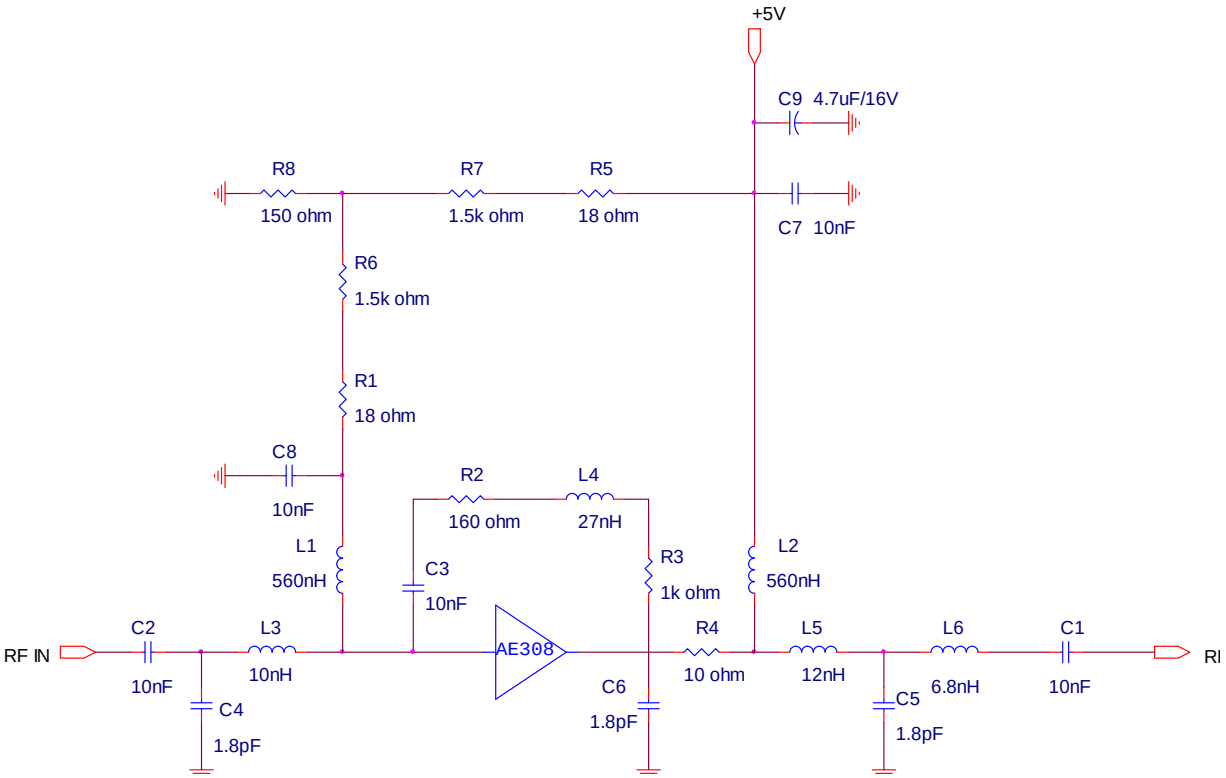

Dimensions

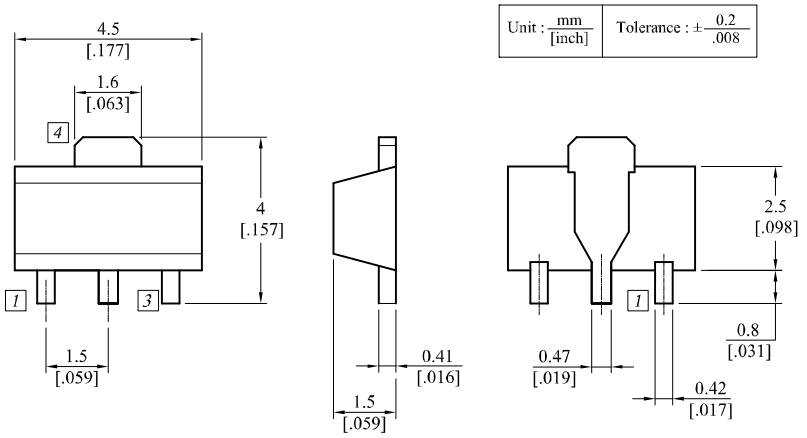


Pin No	Function
1	Input
2	Ground
3	Output
4	Ground


! ESD sensitive

Observe precautions for handling, testing and packaging.

PCB Pad Layout

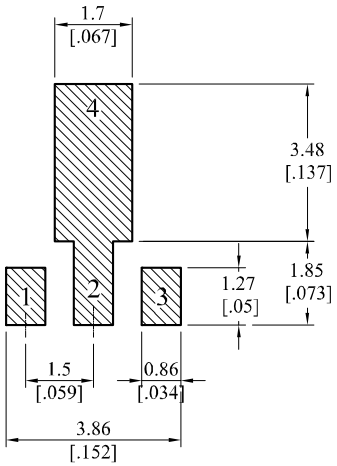

Recommended Mounting Configuration

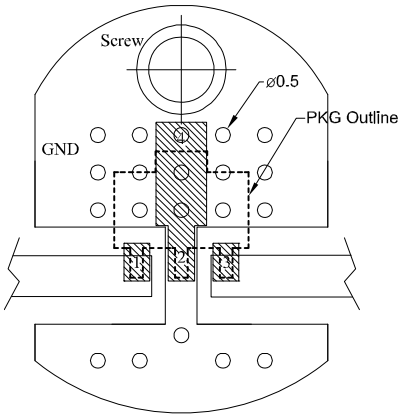

Mounting Configuration Notes

1.Ground / thermal via holes are critical for the proper performance of this device.
2. Add as much copper as possible to inner and outer layers near the part to ensure optimal thermal performance.
3. Mounting screws can be added near the part to fasten the board to a heatsink. Ensure that the ground / thermal via hole region contacts the heatsink.
4. Do not put solder mask on the backside of the PCB in the region where the board contacts the heatsink.
5. RF trace width depends upon the PCB material and construction.
6. Use 1 oz. Copper minimum.
7. All dimensions are in millimeters.

RFHIC Corporation (RFHIC) reserves the right to make changes to any products herein or to discontinue any product at any time without notice. RFHIC do not assume any liability for the suitability of its products for any particular purpose, and disclaims any and all liability, including without limitation consequential or incidental damages. The product specifications herein expressed have been carefully checked and are assumed to be reliable. However, RFHIC disclaims liability for inaccuracies and strongly recommends buyers to verify that the information they are using is current before placing purchase orders. RFHIC products are not intended for use in life support equipment or application where malfunction of the product can be expected to result in personal injury or death. Buyer uses or sells such products for any such unintended or unauthorized application, buyer shall indemnify, protect and hold RFHIC and its directors, officers, stockholders, employees, representatives and distributors harmless against any and all claims arising out of such use. RFHIC's liability under or arising out of damages, claims of whatsoever kind and nature which RFHIC products could cause shall be limited in amount to the net purchase price of the products sold to buyer by RFHIC.