


REVISIONS	
ISSUE	CHANGES
1	CN 8387 A L.R. 12 MAR. 70

GSD
KA-99-24

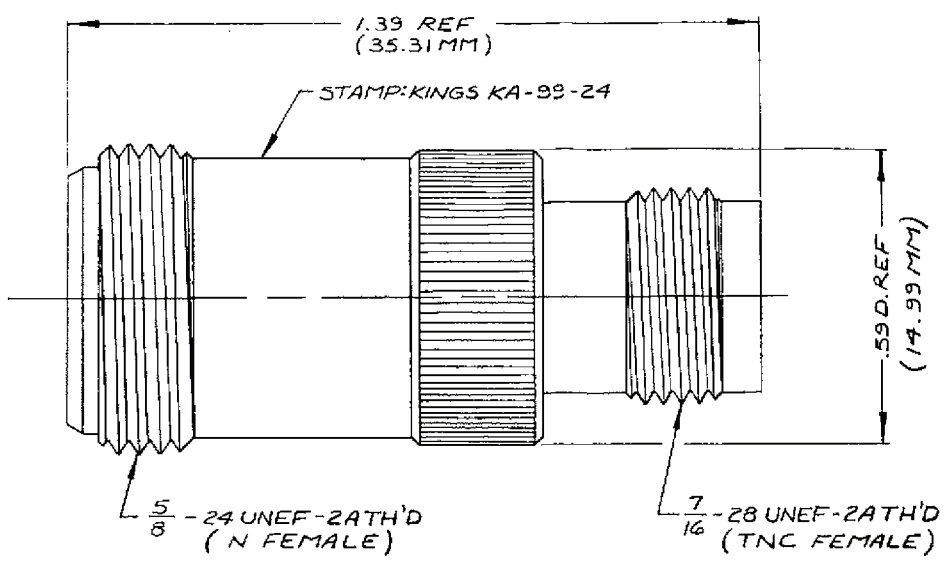

NOTES

1. MATERIAL :
 CENTER CONTACT - BERYLLIUM COPPER, QQ-C-530
 ALL OTHER METAL PARTS - BRASS, QQ-B-626
 INSULATORS - TEFLON, L-P-403
2. FINISHES :
 ALL OTHER METAL PARTS - SILVER PLATE, QQ-S-365
3. ELECTRICAL CHARACTERISTICS
 1. NOMINAL IMPEDANCE - 50 Ω
 2. FREQUENCY RANGE - DC TO 11 GHz
 3. WORKING VOLTAGE - 500 VOLTS RMS

SCALE: 4:1
APPROX. SURFACE AREA:
USED ON:
REF:
N TO TNC ADAPTER (F-F)
DRAWN JEP DATE 10 MAY 83
APPR MJB DATE 10 MAY 83
KINGS ELECTRONICS CO. INC. ROCKAWAY, NEW YORK 10767
KA-99-24

UNLESS OTHERWISE SPECIFIED:

1. TOLERANCES: FRACTIONS & 2 PLACE DECIMALS ± .010	2. REMOVE ALL BURRS. BREAK SHARP EDGES .005 MAX.
3 PLACE DECIMALS ± .004 ANGLES ± 0°30'	3. NO FILLETS PERMITTED.
T. I. R. CONCENTRICITY OF ANY 2 DIAMETERS MAY NOT EXCEED HALF THE SUM OF THEIR TOLERANCES.	4. SURFACE ROUGHNESS 63 MICROINCHES RMS MAX.
	5. ALL DIMENSIONS PRIOR TO PLATING.
	6. ALL PLATING IN ACCORDANCE WITH KER 10004.

GSD