

BR10005-BR1010

Silicon Bridge Rectifiers

VOLTAGE RANGE: 50 --- 1000 V
CURRENT: 10.0 A



BR8

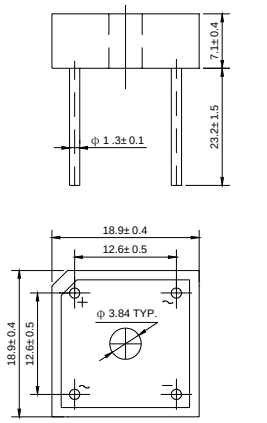

Dimensions in millimeters

Features

- ◇ Rating to 1000V PRV
- ◇ Surge overload rating to 200 Amperes peak
- ◇ Ideal for printed circuit board
- ◇ Reliable low cost construction utilizing molded plastic technique results in inexpensive product
- ◇ Lead solderable per MIL-STD-202 method 208
- ◇ Mounting: thru hole for # 6 screw Mounting

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25℃ ambient temperature unless otherwise specified.

Single phase,half wave,60 Hz,resistive or inductive load. For capacitive load,derate by 20%.

		BR 10005	BR 1001	BR 1002	BR 1004	BR 1006	BR 1008	BR 1010	UNITS
Maximum recurrent peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum average forw ard output current @T_A=50℃	$I_{F(AV)}$	10.0							A
Peak forw ard surge current 8.3ms single half-sine-w ave superimposed on rated load	I_{FSM}	200.0							A
Maximum instantaneous forw ard voltage at 5.0 A	V_F	1.1							V
Maximum reverse current @T_A=25℃ at rated DC blocking voltage @T_A=100℃	I_R	10.0 1.0							μA m A
Operating junction temperature range	T_J	- 55 ---- + 125							℃
Storage temperature range	T_{STG}	- 55 ---- + 150							℃

BR10005-BR1010

Silicon Bridge Rectifiers

Ratings AND Charactieristic Curves

FIG.1 -- PEAK FORWARD SURGE CURRENT

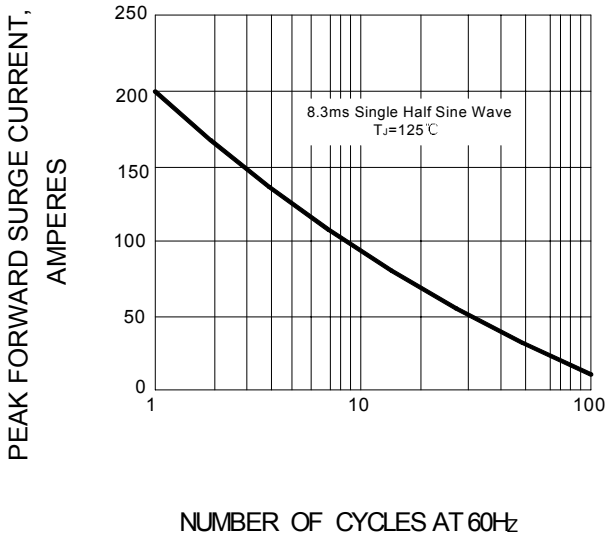


FIG.2 -- FORWARD DERATING CURVE

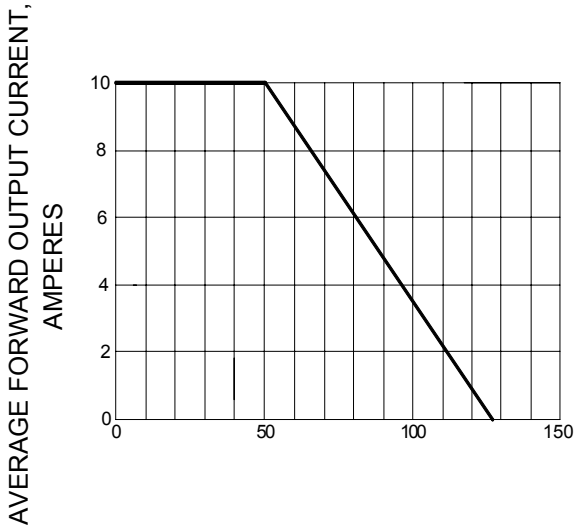


FIG.3 -- TYPICAL FORWARD CHARACTERISTIC

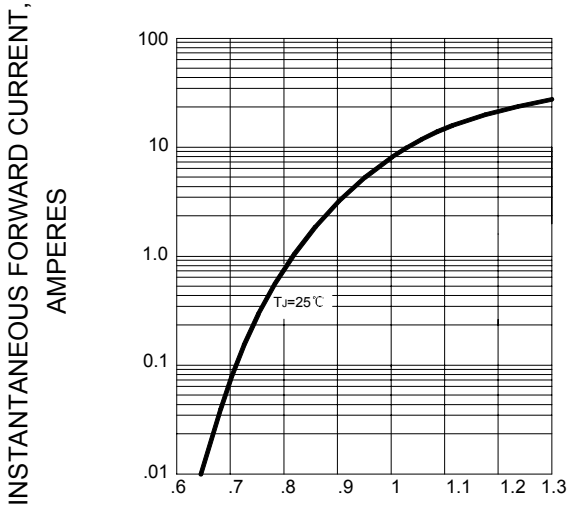


FIG.4 -- TYPICAL REVERSE CHARACTERISTIC

