

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [71718-2000](#)  
**Status:** **Active**  
**Overview:** [LFH™](#)  
**Description:** 1.27mm Pitch LFH™ Matrix 50 Receptacle, Shielded, 200 Circuits, Right Angle

**Documents:**

[3D Model](#) [Product Specification PS-71718-9999 \(PDF\)](#)  
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

**Agency Certification**

CSA LR19980  
 UL E29179

**General**

Product Family I/O Connectors  
 Series [71718](#)  
 Application Wire-to-Board  
 Component Type Receptacle  
 Overview [LFH™](#)  
 Product Name LFH™  
 Type N/A  
 UPC 800754353595

**Physical**


Circuits (Loaded) 200  
 Circuits (maximum) 200  
 Color - Resin Black  
 Flammability 94V-0  
 Lock to Mating Part Yes  
 Material - Metal Beryllium Copper  
 Material - Plating Mating Gold  
 Material - Plating Termination Tin  
 Material - Resin High Temperature Thermoplastic  
 Net Weight 19.488/g  
 Orientation Right Angle  
 PC Tail Length 2.01mm  
 PCB Retention Yes  
 PCB Thickness - Recommended 1.27mm  
 Packaging Type Tube  
 Panel Mount Yes  
 Pitch - Mating Interface 1.27mm  
 Pitch - Termination Interface 1.27mm  
 Plating min - Mating 0.762µm  
 Plating min - Termination 2.540µm  
 Polarized to Mating Part Yes  
 Surface Mount Compatible (SMC) Yes  
 Temperature Range - Operating -20°C to +80°C  
 Termination Interface: Style Surface Mount  
 Wire Size AWG N/A

**Electrical**

Current - Maximum per Contact 1A  
 Shielded Yes  
 Voltage - Maximum 40V

**Solder Process Data**

Duration at Max. Process Temperature (seconds) 40

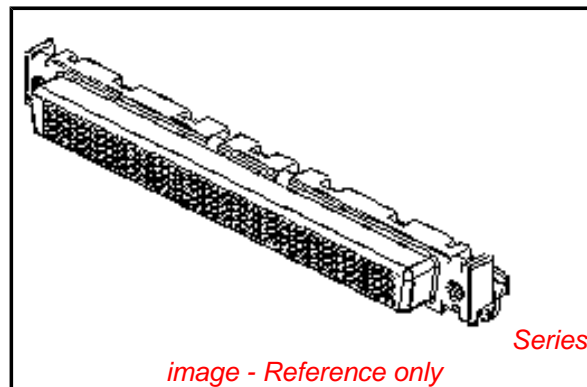

*image - Reference only*

**EU RoHS**

**RoHS Compliant by Exemption**

**REACH SVHC**

Not Reviewed

**Low-Halogen Status**

**Low-Halogen**

**China RoHS**



**Need more information on product environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

**Search Parts in this Series**

[71718Series](#)

**Mates With**

[71719 Cable Kit](#)

**Use With**

[71628 Guide Pin](#) . [70982 Hex Screw Kit](#) .  
[71629 Guide Sleeve](#) . [71771 Guide Sleeve](#)

Lead-free Process Capability	SMC & Wave Capable (TH only)
Max. Cycles at Max. Process Temperature	3
Process Temperature max. C	260

### **Material Info**

### **Reference - Drawing Numbers**

Product Specification	PS-71718-9999
Sales Drawing	SDA-71718-2***

This document was generated on 11/27/2012

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[71718-2000](#)