
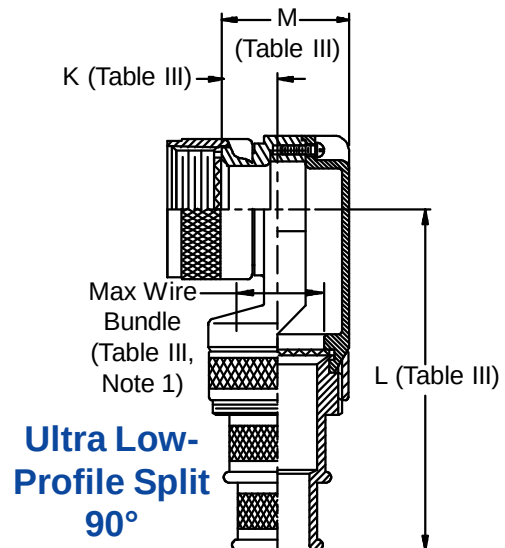
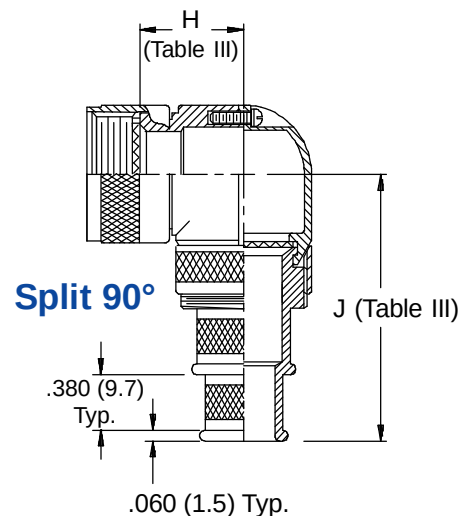




440-072 EMI/RFI Dual Banding Adapter Self-Locking Rotatable Coupling - Split Shell

CONNECTOR DESIGNATORS A-F-H-L-S SELF-LOCKING ROTATABLE COUPLING

Product Series — 440
 Connector Designator — F D 072 NF 16 12 K P
 Angle and Profile —
 C = Ultra-Low Split 90°
 D = Split 90°
 F = Split 45°
 Basic Part No. —
 Polysulfide (Omit for none)
 B = 2 Bands
 K = 2 Precoiled Bands (Omit for none)
 Cable Entry (Table IV)
 Shell Size (Table I)
 Finish (Table II)

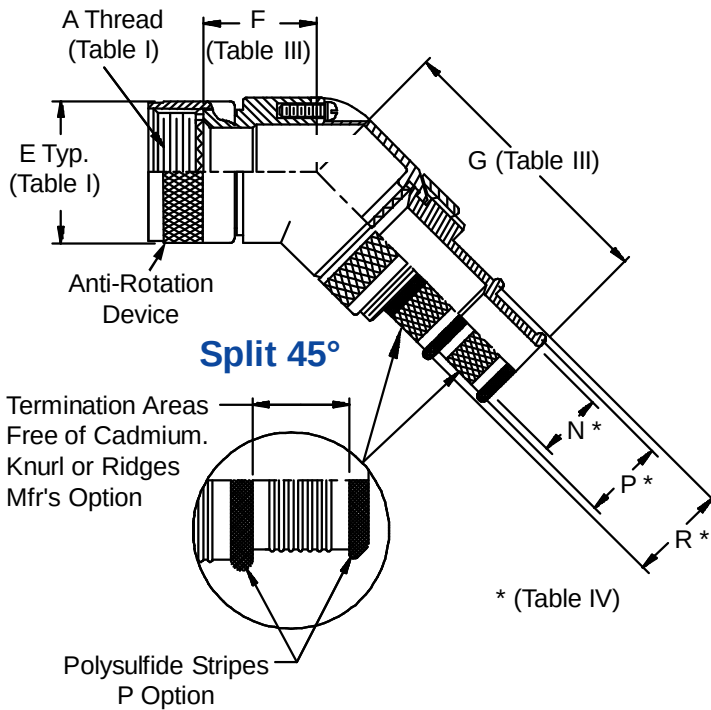

See inside back cover fold-out or pages 13 and 14 for Tables I and II.

TABLE III: ELBOW DIMENSIONS

Shell Size	F Max	G Max	H Max	J Max	K Ref	L Max	M Max	Function C Max Wire Bundle
08/09	.596 (15.1)	1.940 (49.3)	.836 (21.2)	1.880 (47.8)	.496 (12.6)	2.220 (56.4)	.837 (21.3)	.250 (6.4)
10/11	.656 (16.7)	2.000 (50.8)	.906 (23.0)	1.940 (49.3)	.426 (10.8)	2.380 (60.5)	.887 (22.5)	.375 (9.5)
12/13	.716 (18.2)	2.070 (52.6)	.966 (24.5)	2.010 (51.1)	.426 (10.8)	2.380 (60.5)	.887 (22.5)	.375 (9.5)
14/15	.776 (19.7)	2.100 (53.3)	1.026 (26.1)	2.040 (51.8)	.436 (11.1)	2.450 (62.2)	.987 (25.1)	.500 (12.7)
16/17	.836 (21.2)	2.200 (55.9)	1.086 (27.6)	2.140 (54.4)	.576 (14.6)	2.500 (63.5)	1.137 (28.9)	.625 (15.9)
18/19	.906 (23.0)	2.260 (57.4)	1.156 (29.4)	2.200 (55.9)	.796 (20.2)	2.530 (64.3)	1.337 (34.0)	.625 (15.9)
20/21	.976 (24.8)	2.320 (58.9)	1.216 (30.9)	2.260 (57.4)	.796 (20.2)	2.530 (64.3)	1.337 (34.0)	.625 (15.9)
22/23	1.036 (26.3)	2.380 (60.5)	1.276 (32.4)	2.320 (58.9)	.696 (17.7)	2.680 (68.1)	1.337 (34.0)	.750 (19.1)
24/25	1.096 (27.8)	2.440 (62.0)	1.336 (33.9)	2.380 (60.5)	.696 (17.7)	2.680 (68.1)	1.337 (34.0)	.750 (19.1)

TABLE IV: CABLE ENTRY

Dash No.	N Dia	P Dia	R Dia
02	.125 (3.2)	.250 (6.4)	.312 (7.9)
03	.188 (4.8)	.312 (7.9)	.375 (9.5)
04	.250 (6.4)	.375 (9.5)	.438 (11.1)
05	.312 (7.9)	.438 (11.1)	.500 (12.7)
06	.375 (9.5)	.500 (12.7)	.562 (14.3)
07	.438 (11.1)	.562 (14.3)	.625 (15.9)
08	.500 (12.7)	.625 (15.9)	.688 (17.5)
09	.562 (14.3)	.688 (17.5)	.750 (19.1)
10	.625 (15.9)	.750 (19.1)	.812 (20.6)
11	.688 (17.5)	.812 (20.6)	.875 (22.2)
12	.750 (19.1)	.875 (22.2)	.938 (23.8)
13	.812 (20.6)	.938 (23.8)	1.000 (25.4)
14	.875 (22.2)	1.000 (25.4)	1.062 (27.0)
15	.938 (23.8)	1.062 (27.0)	1.125 (28.6)
16	1.000 (25.4)	1.125 (28.6)	1.188 (30.2)
17	1.062 (27.0)	1.188 (30.2)	1.250 (31.8)
18	1.125 (28.6)	1.250 (31.8)	1.312 (33.3)
20	1.250 (31.8)	1.375 (34.9)	1.438 (36.5)
22	1.375 (34.9)	1.500 (38.1)	1.562 (39.7)
24	1.500 (38.1)	1.625 (41.3)	1.688 (42.9)

1. When maximum cable entry (page 21) is exceeded, Style 2 will be supplied (not available on Function C). Dimensions F, G, H and J will not apply. Please consult factory.
2. Metric dimensions (mm) are indicated in parentheses.
3. Backshells supplied with 600-052-* band, see Glenair Series 600 Tool Catalog for installation.
4. Angular function "C", low-profile split elbow, not available with "S" connector designator.