
SL0540 THRU SL05200

5.0A Surface Mount Schottky Barrier Rectifiers

TO-277

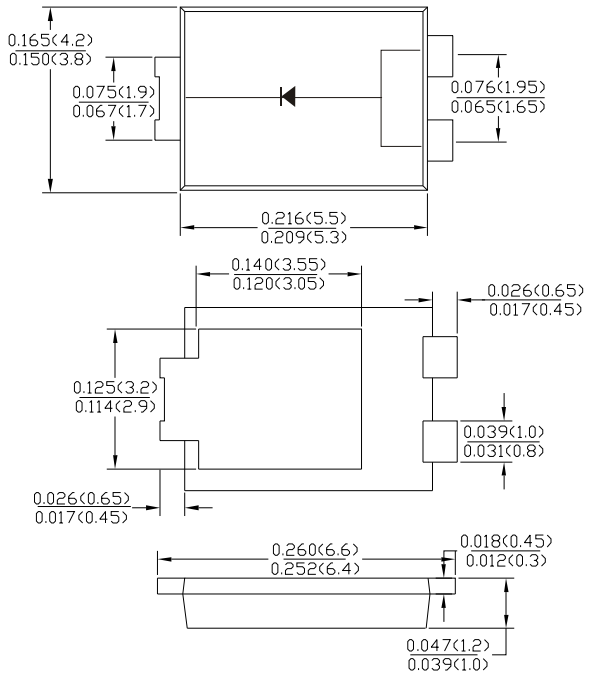

Dimiensions inches and (milimenters)

Features

- Schottky Barrier Chip
- High Thermal Reliability
- Patented Super Barrier Rectifier Technology
- High Forward Surge Capability
- Ultra Fow Power Loss,High Efficiency
- Excellent High Temperature Stability
- Plastic material-UL flammability 94V-0

Mechanical Data

- Case: TO-277, molded plastic
- Terminals:Plated Leads Solderable per MIL-STD-202,Method 208
- Polarity:Cathode Band
- Mounting Position:Any
- Marking:Type Number
- Lead Free:For RoHS/Lead Free Version

Maximum Ratings and Electrical Characteristics @T_A =25℃ unless otherwise specified

Single Phase,half wave,60Hz,resistive or inductive load.For capacitive load,derate current by 20%.

Parameter	Symbol	SL 0540	SL 0545	SL 0550	SL 0560	SL 0580	SL 05100	SL 05150	SL 05200	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC blocking voltage	V_{RRM} V_{RWM} V_{DC}	40	45	50	60	80	100	150	200	V
RMS Rectified Voltage	$V_{R(RMS)}$	28	32	35	42	56	70	105	140	V
Average Rectified Output Current (Note1)	I_O	5								A
Non-Repetitive Peak Forward Surge8.3ms Single Half Sine-Wave Superimposed on rated load(JEDEC Method) (Note2)	I_{FSM}	140								A
Forward Voltage Drop T_A =25 ℃ @IF=5.0A	V_{FM}	0.45		0.50		0.72		0.8	0.85	V
Peak Reverse Curent T_A=25 ℃ At Rated DC Blocking Voltage T_A =100℃	I_R	0.3 15								mA
Typical Thermal Resistance Junctionto Ambient	$R_{\theta JA}$ $R_{\theta JL}$	80 15								℃/W
Operating junction temperature range	T_J	-55 to +150								℃
storage temperature range	T_{STG}	-55 to +150								℃

Note:1.Valid Provided that are kept at ambient temperature at a distance of 9.5mm from the case.

2.Fr-4pcb.2oz.Copper,minimum recommend pad layout .18.8mm×14.4.Anode pad dimensions 5.6mm×14.4mm.

www.microdiode.com

RATINGS AND CHARACTERISTIC CURVES SL0540 THRU SL05200

Fig.1 - Forward Current Derating Curve

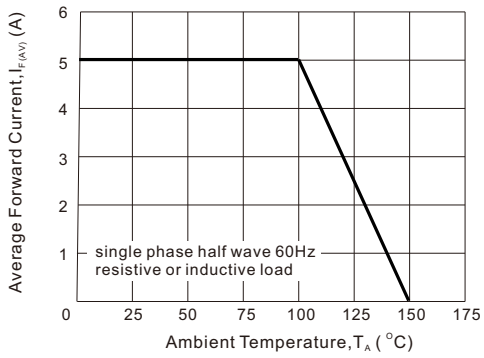


Fig2 : Instantaneous Forward Voltage

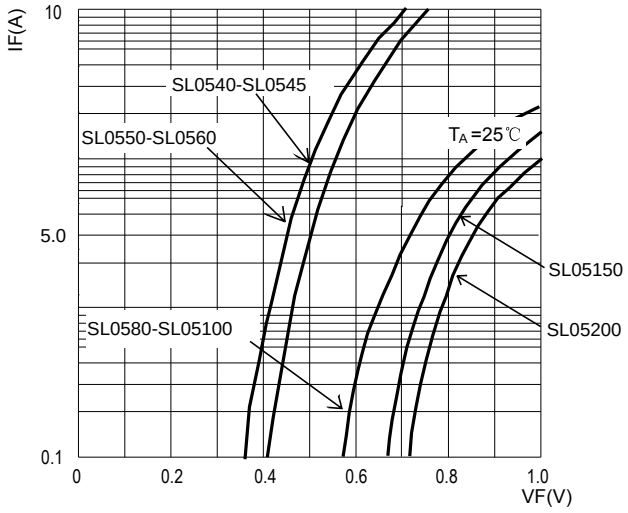


Fig3: Surge Forward Current Capadility


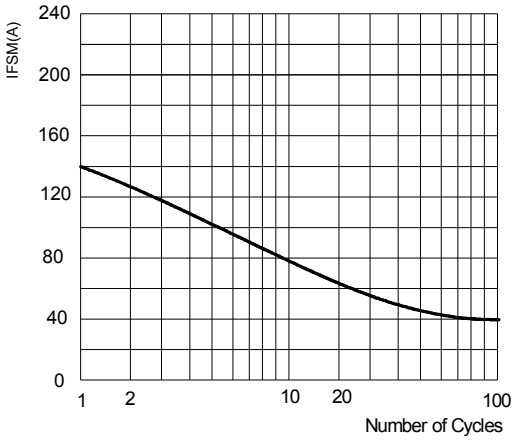


Fig4: Typical Reverse Characteristics

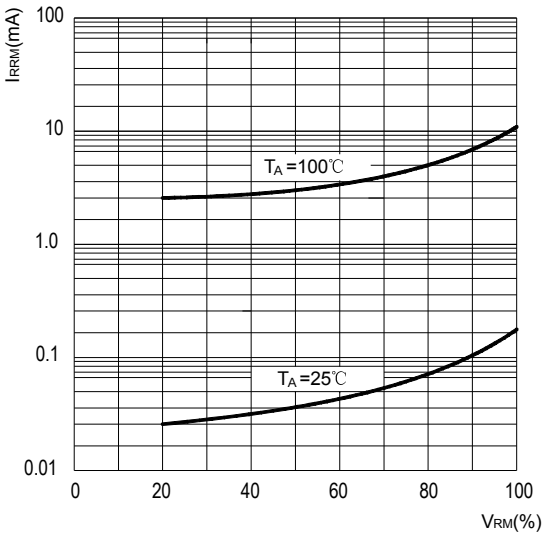

The cruve graph is for reference only, can't be the basis for judgment(曲线图仅供参考)!

www.microdiode.com