

Features

- X2 class capacitor RE series with insulated flexible wire leads.
- Two types of wire (single wire type & multiple wire type).
- UL, CSA (cUL), IEC/EN 60384-14 (class X2).



Safety Standard		File No.
UL	:UL60384-14	E236227
cUL	:CSA E60384-14	
ENEC	:IEC/EN 60384-14	SE/0142-28


The "ENEC" mark is a common European product certification mark based on testing to harmonised European safety standard. The mark with #14 stands for SEMKO.




Applications

- Industrial machinery, Electric appliances and Lighting.


Dimensions

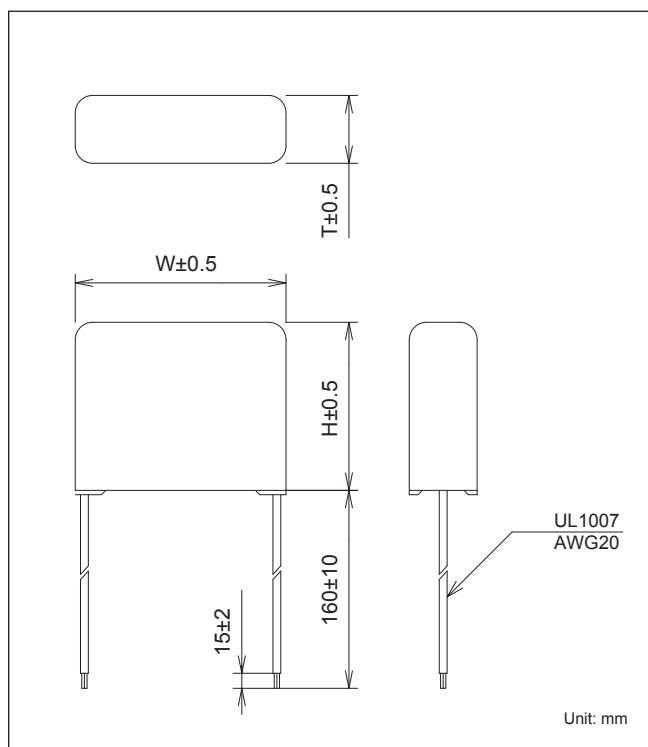

Circuit



Model numbering system



Electrical Specifications

Rated Voltage **275Vac (UL, cUL: 250Vac)**

Safety Standard	Class	Model Number	Capacitance μF±10%	Dimensions			Dissipation Factor	Test Voltage	Insulation Resistance						
				W	H	T									
UL US	X2	REB473	0.047	17.0	12.5	5.5	0.003max. (at 10kHz)	Line to Line 1,250Vac 50/60Hz 60sec	Line to Line C≤0.33μF 15,000MΩmin. (at 100Vdc)						
		REB683	0.068		13.5	6.5									
		REB104	0.1		15.0	8.0									
REB154		0.15	20.0	17.5	8.5					Line to Case 2,000Vac 50/60Hz 60sec	Line to Case C=0.47μF 5,000Ω•Fmin. (at 100Vdc)				
REB224		0.22													
REB334		0.33	27.0	18.0	8.0										
REB474		0.47		19.5	9.5										
S		REB684	0.68	32.0	21.5							10.5			
		REB105	1.0		23.5							12.5			

Operating Temperature: -40~+100°C