


SHEET 1 OF 1

▲ LED SPECS	UNITS	RED
FORWARD CURRENT	mA	20
FORWARD VOLTAGE @20mA	V	1.5-2.4
LUMINOUS INTENSITY @ 10mA	MCD	300



T	D
1.0-2.0	8.0-8.2
2.0-2.5	8.2-8.4
2.5-3.0	8.4-8.6



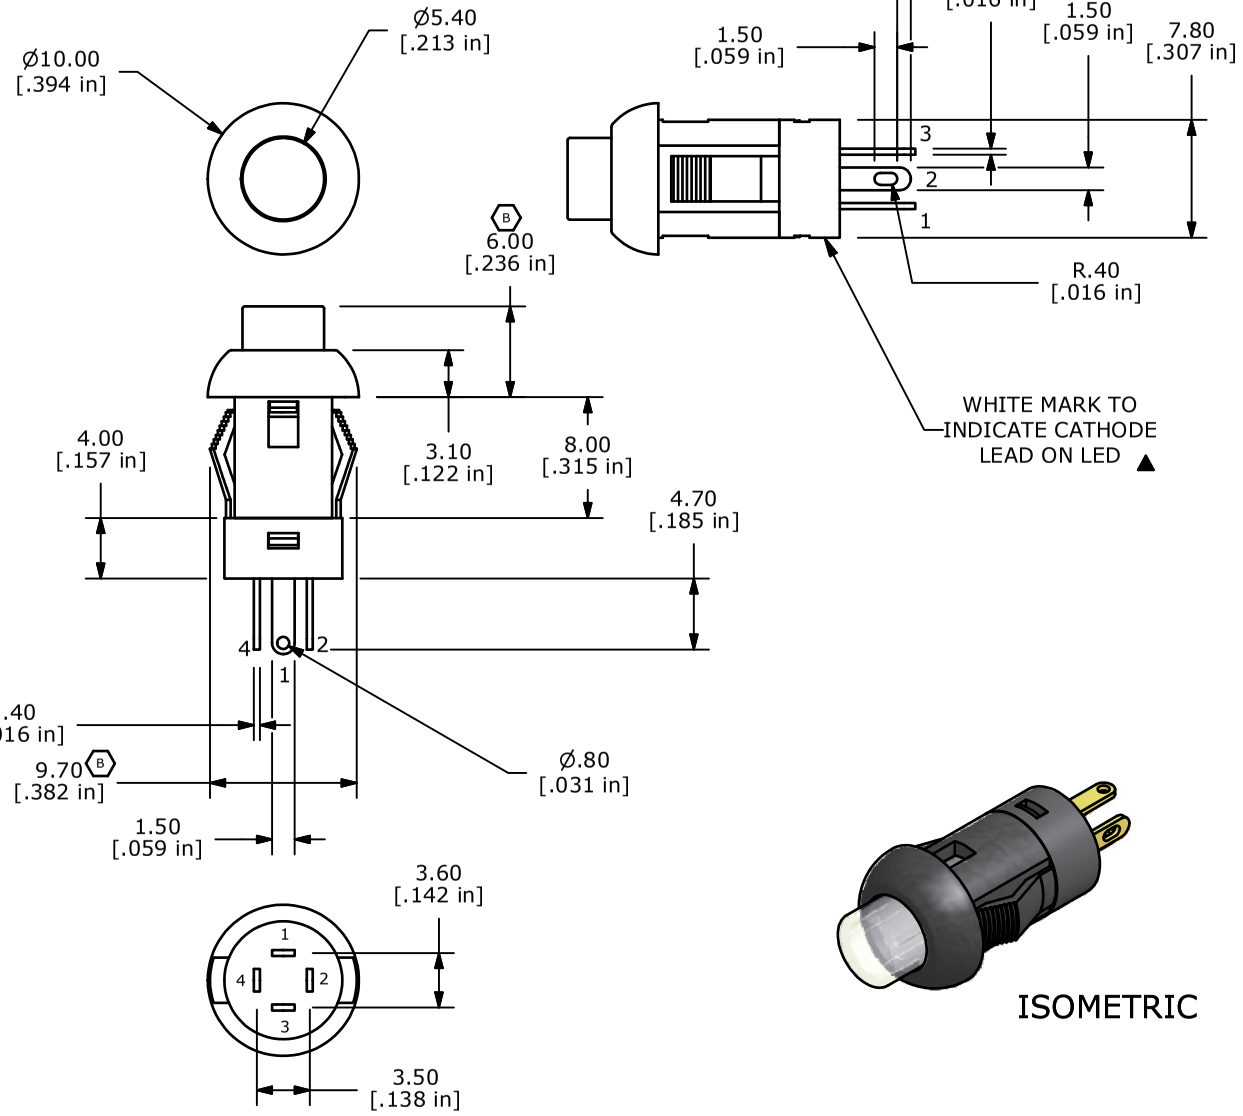

ISOMETRIC

NOTES:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. RATING: 30VDC @ 100mA
4. CONTACT RESISTANCE: 50mΩ MAX.
5. INSULATION RESISTANCE: 100MΩ MIN@500VDC.
6. OPERATING FORCE: 250± 100gf
7. TRAVEL: 1.8± 0.3mm
8. OPERATING TEMPURATURE: -40˚C TO 85˚C
9. OPERATING LIFE: 50,000 CYCLES
10. ▲ LED: RED
11. ▲ DENOTES CRITICAL PARAMETERS
12. 2002/95/EC (ROHS) COMPLIANT

REV	PCR NO	DESCRIPTION	DATE	BY
B	19582	CHANGED DIMS: was 9.6 & 6.1	1/13/11	BGL
A	18259	New Release	9/24/08	rc

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH™

TITLE LP1OA1AR

SCALE	DATE	DR	DWG	REV
2=1	7/10/2008	rc	B200200	B