May.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

| | COUNT | DESCRIPTION OF REVISIONS | BY | CHKD | DATE |
|---|---|---|---|---|---|
| △ | | | | | . . |
| △ | | | | | . . |
| △ | | | | | . . |

| | COUNT | DESCRIPTION OF REVISIONS | BY | CHKD | DATE |
|---|---|---|---|---|---|
| △ | | | | | . . |
| △ | | | | | . . |
| △ | | | | | . . |

G PORTION

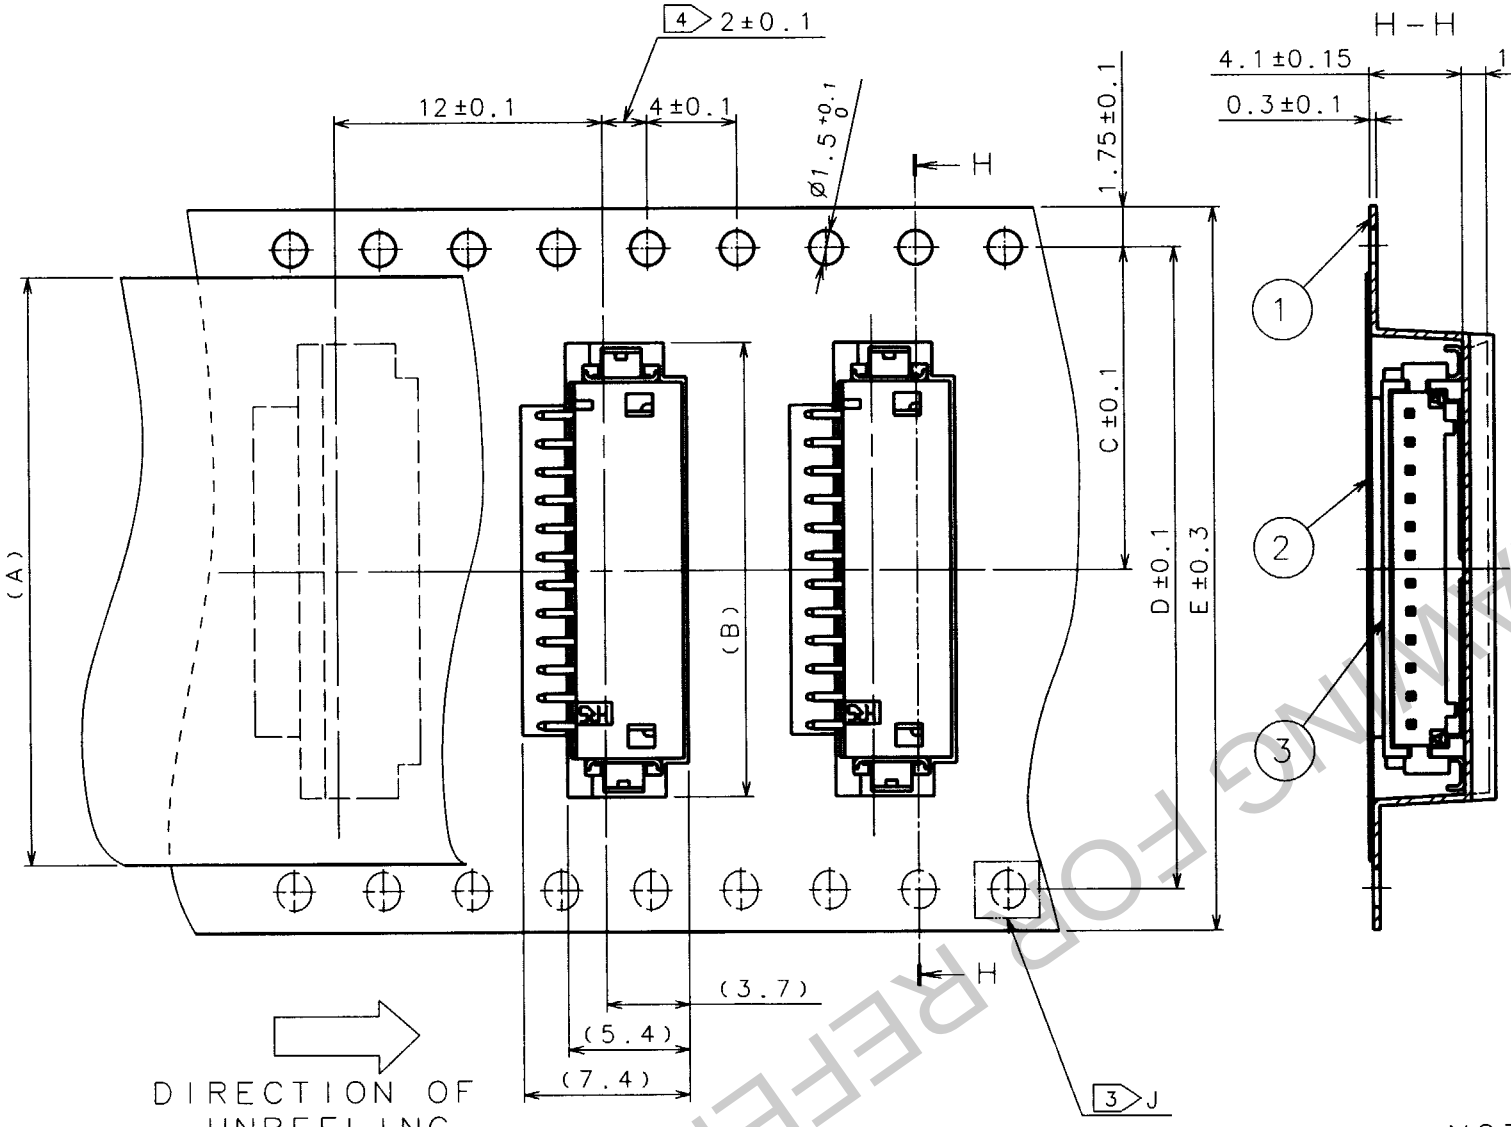





DIRECTION OF UNREELING

| CODE NO. | PART NO. | A | B | C | D | E | F |
|---|---|---|---|---|---|---|---|
| CL536-0301-8-51 | DF13A- 2P-1.25H(51) | 13.5 | 7.6 | 7.5 | | 16 | 16.4 |
| CL536-0302-0-51 | DF13A- 3P-1.25H(51) | 13.5 | 8.85 | 7.5 | | 16 | 16.4 |
| CL536-0303-3-51 | DF13A- 4P-1.25H(51) | 21.5 | 10.1 | 11.5 | | 24 | 24.4 |
| CL536-0304-6-51 | DF13A- 5P-1.25H(51) | 21.5 | 11.35 | 11.5 | | 24 | 24.4 |
| CL536-0305-9-51 | DF13A- 6P-1.25H(51) | 21.5 | 12.6 | 11.5 | | 24 | 24.4 |
| CL536-0306-1-51 | DF13A- 7P-1.25H(51) | 21.5 | 13.85 | 11.5 | | 24 | 24.4 |
| CL536-0307-4-51 | DF13A- 8P-1.25H(51) | 21.5 | 15.1 | 11.5 | | 24 | 24.4 |
| CL536-0308-7-51 | DF13A- 9P-1.25H(51) | 21.5 | 16.35 | 11.5 | | 24 | 24.4 |
| CL536-0309-0-51 | DF13A-10P-1.25H(51) | 21.5 | 17.6 | 11.5 | | 24 | 24.4 |
| CL536-0310-9-51 | DF13A-11P-1.25H(51) | 26 | 18.85 | 14.2 | 28.4 | 32 | 32.4 |
| CL536-0311-1-51 | DF13A-12P-1.25H(51) | 26 | 20.1 | 14.2 | 28.4 | 32 | 32.4 |
| CL536-0313-7-51 | DF13A-14P-1.25H(51) | 26 | 22.6 | 14.2 | 28.4 | 32 | 32.4 |
| CL536-0314-0-51 | DF13A-15P-1.25H(51) | 37 | 23.85 | 20.2 | 40.4 | 44 | 44.4 |

DETAIL OF PART NO. LABEL

- SUPPLIER
- QUANTITY
- PART NO.
- CODE NO.
- DATE OF MANUFACTURED

| | |
|---|---|
| 生産日 | 年 月 日 |
| 図番 | CL536-****-*-51 |
| 品名 | DF13A-*P-1.25H(51) |
| 納入数量 | 1000個 |
| 納入者 | ヒロセ電機(株) |

STYLE AND DIMENSION OF REEL

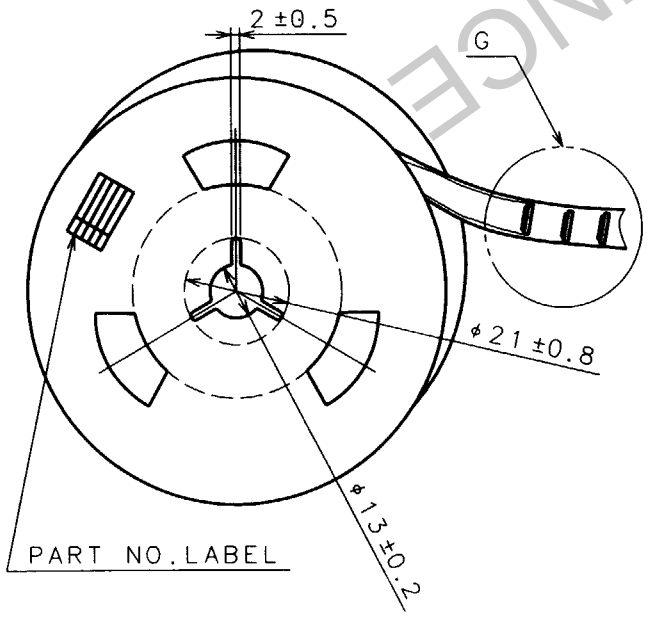


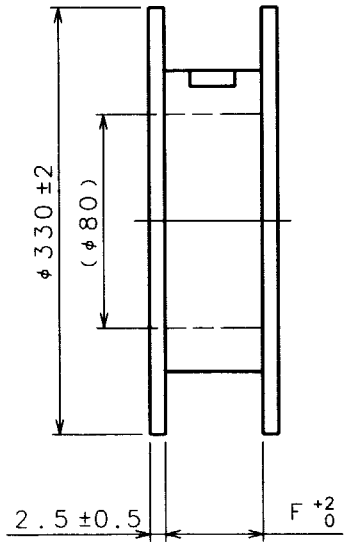


J(10:1)

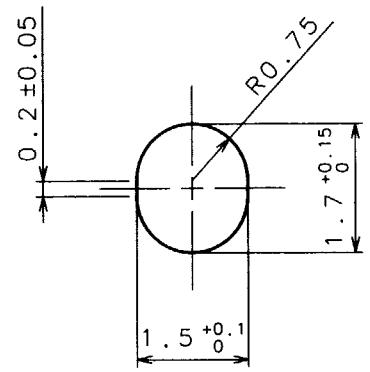


NOTES 1:1 REEL 1000 CONNECTORS.
2:AT THE BEGINING OF THE REEL, 30 COMPONENTS SHALL BE EMPTY. AT THE END OF THE REEL, 20 COMPONENTS SHALL BE EMPTY.
3: WHEN THE TAPE WIDTH IS 32 OR 44mm, SPROCKET HOLES SHALL BE SET ON BOTH SIDES OF REEL AS SHOWN ON THIS DRAWING.
4: WHEN THE TAPE WIDTH IS 44mm OR OVER, THE TOLERANCE SHALL BE 2±0.15.

| NO. | MATERIAL | FINISH, REMARKS | NO. | MATERIAL | FINISH, REMARKS |
|---|---|---|---|---|---|
| 2 | POLYESTER | CLEAR (COVER TAPE) | | | |
| 1 | PAN | CLEAR (EMBOSSED CARRIER TAPE) | 3 | DF13A-*P-1.25H(01) | |

| CODE NO.(OLD) | DRAWN | DESIGNED | CHECKED | APPROVED | RELEASED |
|---|---|---|---|---|---|
| | F.Asai 98.6.23 | F.Asai 98.6.23 | K.Ishiyama '98.6.25 | K.Katayose '98.6.25 | |

| | | | |
|---|---|---|---|
| SCALE FR:EE | DRAWING NO. EDC3-162444-02 | PART NO. DF13A-*P-1.25H(51) | |
| UNITS mm | HRS HIROSE ELECTRIC CO.,LTD. | CODE NO. CODE NO. SHALL BE ACCORDANCE WITH TABLE. | 1/1 |

| TO |
|---|
| |
| |
| |
| |
| |

HRS DRAWING FOR REFERENCE

FORM NO.229