This document was generated on 10/23/2018


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: 0151350206

Status: Active

Overview: CLIK-Mate Wire-to-Board Connectors

Description: CLIK-Mate-to-CLIK-Mate Off-the-Shelf (OTS) Cable Assembly, Single Row, 600.00mm Length, 2 Circuits, Beige

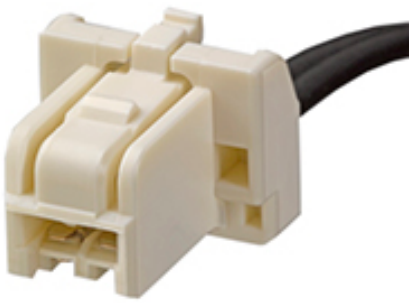

Series image - Reference only

Documents:

Drawing (PDF)

Product Literature (PDF)

RoHS Certificate of Compliance (PDF)

EU ELV
Not Relevant

EU RoHS
Compliant

China RoHS

REACH SVHC
Not Contained Per - ED/61/2018 (27 June 2018)

Halogen-Free Status
Not Low-Halogen

For more information, please visit Contact US

China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series
15135 Series

Mates With
503395 Bottom-Entry Receptacle . 503175 Right Angle, Through Hole Receptacle . 502585 Right Angle, Surface Mount Receptacle
 503159 Vertical, Through Hole Receptacle
 502584 , 505405 Vertical, Surface Mount Receptacle

General	
Product Family	Cable Assemblies
Series	15135
Assembly Configuration	Dual Ended Connectors
Connector to Connector	CLIK-Mate-to-CLIK-Mate
Overmolded	No
Overview	CLIK-Mate Wire-to-Board Connectors
Product Literature Order No	987651-6143
Product Name	CLIK-Mate OTS
UPC	191128154574
Physical	
Cable Length	600.00mm
Circuits (Loaded)	2
Color - Resin	Beige
Gender	Male-Male
Lock to Mating Part	Yes
Material - Metal	Copper Alloy
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	PBT
Net Weight	4.174/g
Packaging Type	Bag
Pitch - Mating Interface	1.50mm
Plating min - Mating	0.406µm
Plating min - Termination	0.406µm
Single Ended	No
Termination Interface: Style	Crimp or Compression
Wire Insulation Diameter	1.10mm
Wire Size AWG	24
Wire/Cable Type	UL 1061
Electrical	
Current - Maximum per Contact	1.5A
Voltage - Maximum	100V AC (RMS)/DC
Material Info	
Reference - Drawing Numbers	
Sales Drawing	2012341673-000

This document was generated on 10/23/2018

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION