


R75, Film, Metallized Polypropylene, Commercial Grade, 8200 pF, 5%, 1,000 V, 85C, Lead Spacing = 7.5mm

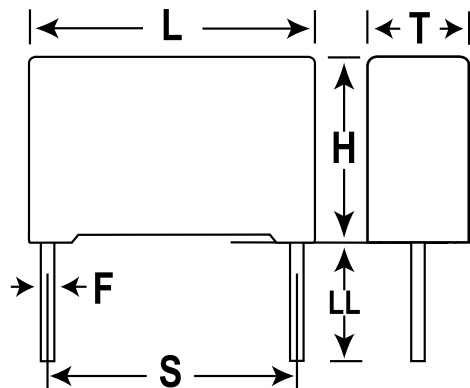

Dimensions

L	10.5mm +0.2mm
H	12mm +0.1mm
T	6mm +0.1mm
S	7.5mm +/-0.4mm
LL	4mm +1.5mm
F	0.5mm +/-0.05mm

Packaging Specifications

Packaging:	Bulk, Bag
Packaging Quantity:	1000

General Information

Supplier:	KEMET
Series:	R75
Dielectric:	Metallized Polypropylene
Style:	Radial
Features:	Automotive Grade, Pulse
RoHS:	Yes
Lead:	Cut
Approvals:	AEC-Q200
AEC-Q200:	Yes
Miscellaneous:	Above 85C DC And AC Voltage Derating Is 1.25%/C

Specifications

Capacitance:	8200 pF
Capacitance Tolerance:	5%
Voltage DC:	1000 VDC
Voltage AC:	400 VAC
Temperature Range:	-55/+105C
Rated Temperature:	85C
Dissipation Factor:	0.04% 1kHz, 0.06% 10kHz, 0.25% 100kHz
Insulation Resistance:	100 GOhms
Max dVdt:	4,000 V
Inductance:	8 nH