Extract from the online catalog

MSTBA 2,5/ 4-G-5,08 THT-R32

Order No.: 1937253

The illustration shows an 8-position version



http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1937253

Header, Nominal current: 12 A, Rated voltage (III/2): 320 V, Number of positions: 4, Pitch: 5.08 mm, Color: black, Metal surface: Sn, Assembly: Taped SMD/THT/THR components, User information and design recommendations on through hole reflow technology can be found at: http://www.combicon.com

Commercial data	
GTIN (EAN)	4 017918 733780
Note	Made-to-order
sales group	E172
Pack	330 pcs.
Customs tariff	85366990
Catalog page information	Page 148 (CC-2002)

Product notes

WEEE/RoHS-compliant since: 01/01/2003

http://www.download.phoenixcontact.com
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Certificates / Approvals


Certification	CUL, GOST, UL

Accessories


Item	Designation	Description
Plug/Adapter		
1734401	CR-MSTB	Coding section, inserted into the recess in the header or the inverted plug, red insulating material


Diagrams/Drawings

Drilling plan/solder pad geometry

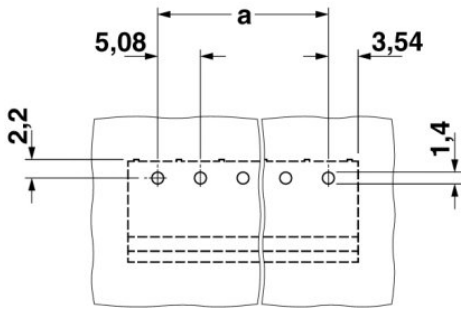

Dimensioned drawing

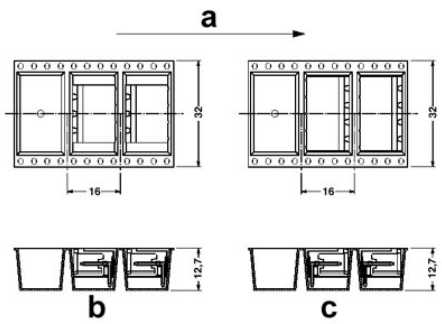

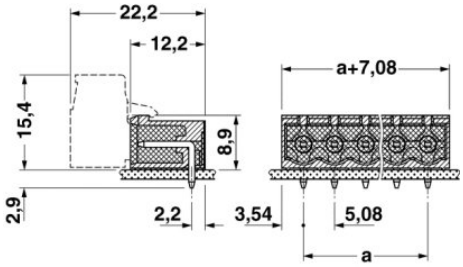

a = Direction of feed
b = Odd pos. nos. (3)
c = Even pos. nos. (2 and 4)

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg,Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
http://www.phoenixcontact.de



© 2010 Phoenix Contact
Technical modifications reserved;