
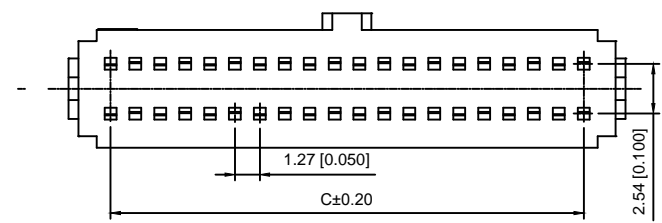
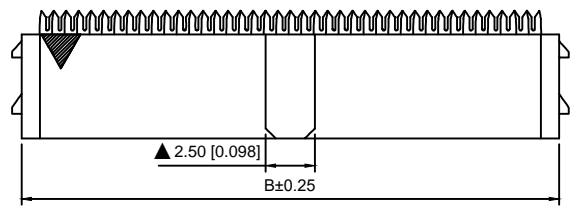

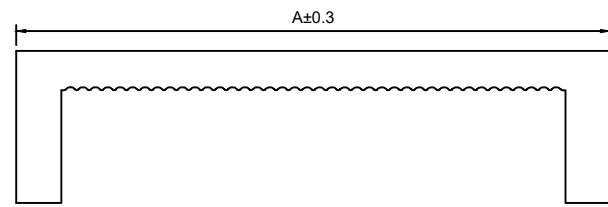

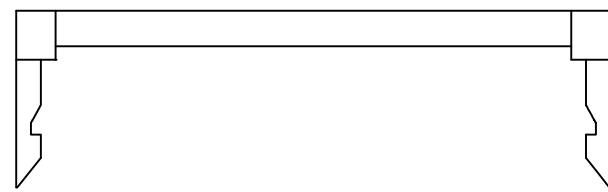



Voltage rating:50V AC/DC  
 额定电压:50V AC/DC  
 Current rating:0.5A  
 额定电流: 0.5A  
 Insulation resistance:1000MΩ Min  
 绝缘电阻: 1000MΩ Min  
 Withstanding voltage:≥300V AC/minute  
 耐压: ≥300VC/分钟  
 Temperature range:-55℃--+105℃  
 使用温度: -55℃--+105℃

X1270 H -2xXX A - PT AuSn  
 ① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② Category:H-HSG
- ③ Row No.-Pin No.:2xXX-2x05P~2x50P
- ④ A:1.27x2.54mm
- ⑤ Material:PT-Nylon PBT UL94V-0
- ⑥ Planting Category:AuSn-Plating AuSn

PINS	A	B	C
2x05P	11.25	8.35	5.08
2x07P	13.79	10.89	7.62
2x08P	15.06	12.12	8.89
2x10P	17.60	14.70	11.43
2x13P	21.41	18.51	15.24
2x15P	23.95	21.05	17.78
2x16P	25.22	22.32	19.05
2x17P	26.49	23.59	20.32
2x20P	30.30	27.40	24.13
2x25P	36.65	33.75	30.48
2x30P	43.00	40.10	36.83
2x34P	48.08	45.18	41.91
2x50P	68.40	65.50	62.23

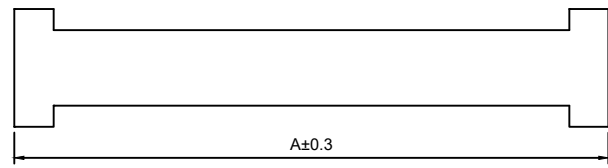

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
ΔX					ANGULAR ±5°
ΔX					L ≤ 4 ±0.2
ΔX					4 < L ≤ 16 ±0.3
					16 < L ≤ 63 ±0.4
					L > 63 ±0.5
REVISIONS					UNSPECIFIED TOLERANCES
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn					



XKB INDUSTRIAL PRECISION CO., LIMITED

DSND	SCALE: N/A	MODEL TYPE: 1.27x2.54mm IDC
DWN	VIEW:	PART NO.: X1270H-2xXXA-PTAuSn
CHKD	UNIT: mm/in	DWG NO.: X-X1270H-2xXXA-PTAuSn
APPD	SIZE: A4	WEIGHT
		SHEET
		REVISION
		1/1
		A0