

# Stainless Steel Cable Ties



## Features


- Industry Standard Type 304 – Lock Ball Style – RoHS Compliant
- Maximum Temperature: +1472°F (+800°C)

## Ideal Applications

- Harsh, Corrosive, and Salt-Water Environments, Chemical and Radiation Exposure, Food Processing and Vibrating Equipment



## WT-08

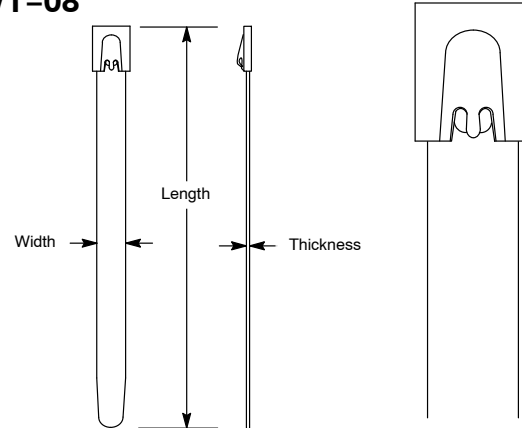

### 100 lb. Stainless Steel

| NTE Type No.   | Tensile Strength | Length      | Width      | Thickness   | Max. Bundle Dia. | Qty. per Bag | Diag No. |
|----------------|------------------|-------------|------------|-------------|------------------|--------------|----------|
| NEW 04-06100SS | 100 lb.          | 5.9 / 150   | .180 / 4.6 | .012 / .305 | 1.38 / 35.052    | 100          | WT-08    |
| NEW 04-09100SS | 100 lb.          | 9.45 / 240  | .180 / 4.6 | .012 / .305 | 2.17 / 55.118    | 100          | WT-08    |
| NEW 04-14100SS | 100 lb.          | 13.78 / 350 | .180 / 4.6 | .012 / .305 | 3.54 / 89.916    | 100          | WT-08    |

### 150 lb. Stainless Steel

| NTE Type No.   | Tensile Strength | Length      | Width      | Thickness   | Max. Bundle Dia. | Qty. per Bag | Diag No. |
|----------------|------------------|-------------|------------|-------------|------------------|--------------|----------|
| NEW 04-06150SS | 150 lb.          | 5.9 / 150   | .315 / 8.0 | .012 / .305 | 1.38 / 35.052    | 100          | WT-08    |
| NEW 04-09150SS | 150 lb.          | 9.45 / 240  | .315 / 8.0 | .012 / .305 | 2.17 / 55.118    | 100          | WT-08    |
| NEW 04-12150SS | 150 lb.          | 11.81 / 300 | .315 / 8.0 | .012 / .305 | 2.86 / 72.644    | 100          | WT-08    |
| NEW 04-14150SS | 150 lb.          | 13.78 / 350 | .315 / 8.0 | .012 / .305 | 3.54 / 89.916    | 100          | WT-08    |
| NEW 04-20150SS | 150 lb.          | 19.69 / 500 | .315 / 8.0 | .012 / .305 | 5.91 / 150.114   | 100          | WT-08    |
| NEW 04-24150SS | 150 lb.          | 23.62 / 600 | .315 / 8.0 | .012 / .305 | 6.69 / 169.926   | 100          | WT-08    |

### 250 lb. Stainless Steel

| NTE Type No.   | Tensile Strength | Length      | Width       | Thickness   | Max. Bundle Dia. | Qty. per Bag | Diag No. |
|----------------|------------------|-------------|-------------|-------------|------------------|--------------|----------|
| NEW 04-08250SS | 250 lb.          | 7.87 / 200  | .455 / 13.0 | .015 / .381 | 1.97 / 50.038    | 100          | WT-08    |
| NEW 04-14250SS | 250 lb.          | 13.78 / 350 | .455 / 13.0 | .015 / .381 | 3.54 / 89.916    | 100          | WT-08    |
| NEW 04-20250SS | 250 lb.          | 19.69 / 500 | .455 / 13.0 | .015 / .381 | 5.91 / 150.114   | 100          | WT-08    |

Note 1. Dimensions are listed as "inch / millimeter".

# Cable Tie Convenience Packs



## Features

- 3 Convenient Sizes in 1 Package
- Saves Time with 3 easy Access Doors
- No More Sorting. Individual Compartments Eliminates Time Spent Searching Through Various Sizes in a Canister
- Easy Storage Package Designed to fit into Tool Boxes or Hang on Peg Boards
- Exceptional Value Compared to Purchasing Items Separately



### Cable Tie Convenience Packs

| NTE Type No. | Color   | Quantity | Part Number | Tie Type         | Length (in. / mm) | Width (in. / mm) | Mil Spec |
|--------------|---------|----------|-------------|------------------|-------------------|------------------|----------|
| 04-CPBLK     | Black   | 200      | 04-04180    | 18 lb. Miniature | 4.12 / 104.77     | .095 / 2.413     | MS3367-4 |
|              | Black   | 100      | 04-07500    | 50 lb. Standard  | 7.56 / 192.07     | .180 / 4.572     | MS3367-1 |
|              | Black   | 100      | 04-11500    | 50 lb. Standard  | 11.25 / 285.75    | .180 / 4.572     | MS3367-7 |
| 04-CPNAT     | Natural | 200      | 04-04180    | 18 lb. Miniature | 4.12 / 104.77     | .095 / 2.413     | MS3367-4 |
|              | Natural | 100      | 04-07500    | 50 lb. Standard  | 7.56 / 192.07     | .180 / 4.572     | MS3367-1 |
|              | Natural | 100      | 04-11500    | 50 lb. Standard  | 11.25 / 285.75    | .180 / 4.572     | MS3367-7 |