

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0395140004](#)
Status: **Active**
Description: 3.81mm (.150") Pitch Eurostyle™ Horizontal Plug, with Retention Screws, 4 Circuits

Documents:
[3D Model](#) [Product Specification PS-39500-001 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)


General
Product Family Terminal Blocks
Series [39514](#)
Application Wire-to-Board
Component Type Plug
Product Literature Order No USA-355
Product Name ESE, Eurostyle™ Pluggable
Type Euro Block

Physical
Circuits (Loaded) 4
Entry Angle Vertical
Lock to Mating Part Yes
Number of Rows 1
Orientation Horizontal
Panel Mount No
Pitch - Mating Interface (in) 0.150 In
Pitch - Mating Interface (mm) 3.81 mm
Polarized to Mating Part Yes
Stackable No
Temperature Range - Operating -40°C to +105°C
Wire Size AWG 16, 18, 20, 22, 24
Wire Size mm² 0.20 - 1.31

Electrical
Current - Maximum 8A
Voltage - Maximum 300V

Material Info

Reference - Drawing Numbers
Product Specification PS-39500-001
Sales Drawing SD-39514-001

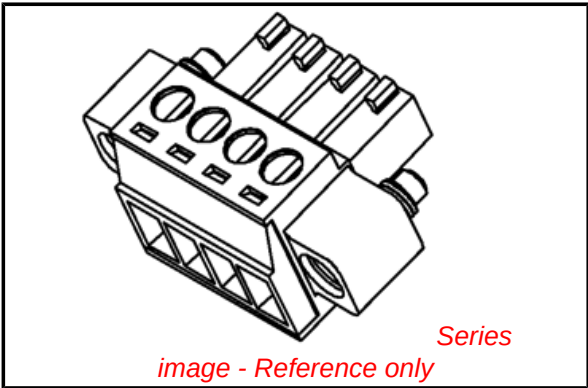

EU RoHS
ELV and RoHS
Compliant
REACH SVHC
Not Reviewed
Halogen-Free
Status
Not Reviewed







Need more information on product environmental compliance?
Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)
Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series
[39514Series](#)

Mates With
Most 3.81mm (.150") Pitch Industry Standard PCB Headers, [39515](#) Vertical PCB Header with Threaded Retention Inserts, [39516](#) Horizontal PCB Header with Threaded Retention Inserts

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

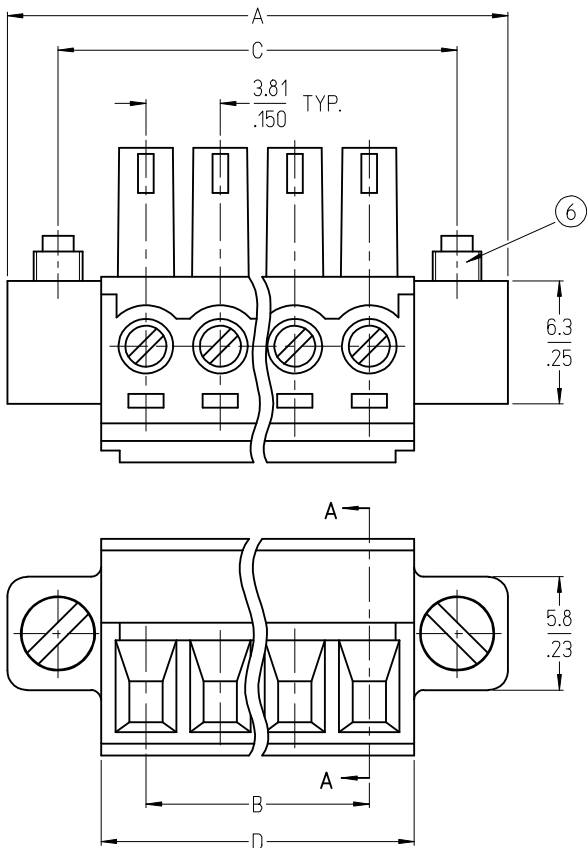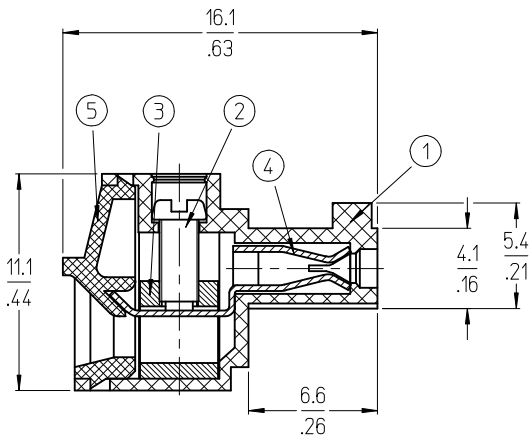


SECTION
A-A

- SPECIFICATIONS:
- MATERIAL:
 - BODY: NYLON 66 (PA 66)
 - SCREW: STEEL.
 - CAGE (*): BRASS
 - TERMINAL: BRASS
 - COVER: NYLON 66 (PA 66)
 - SCREW: STEEL.
 - PRODUCT SPECIFICATION: PS-39500-001.
 - WIRE RANGE: 30 - 16AWG.
 - TORQUE: 2 in-lbs.
 - WIRE STRIP LENGTH: 6.50/.256.
 - NUMBER OF CIRCUIT POSITIONS AVAILABLE = 2 THROUGH 20.
 - ASSEMBLY IS ROHS COMPLIANT BY EXEMPTION.
COMPONENTS MARKED WITH AN ASTERISK (*) ARE ROHS COMPLIANT BY EXEMPTION, ALL OTHERS ARE ROHS COMPLIANT.


ADD IMPRINTING EC NO: WNA2009-0618 DRAWN:CLYORK 2009/04/29 CHKD:RDEROSS 2009/04/30 APPR:RDEROSS 2009/05/01	DESCRIPTION	QUALITY SYMBOLS ▽=0 C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE 4:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION			
			mm	INCH	DRAWN BY	DATE	TITLE 3.81MM, EURO PLUG, RIGHT ANGLE, MTG ENDS					
			4 PLACES ± ---	± ---	EHILE	2006/03/20						
			3 PLACES ± ---	± .005	CHECKED BY	DATE	MOLEX INCORPORATED					
			2 PLACES ± 0.13	± .01	EHILE	2006/03/20						
			1 PLACE ± 0.3	± ---	APPROVED BY	DATE	MATERIAL NO. SEE CHART					
			ANGULAR ± 2 °		RDEROSS	2006/03/20						
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DOCUMENT NO. SD-39514-001		SHEET NO. 1 OF 2					
					THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

10 9 8 7 6 5 4 3 2 39514

Circuit size	Material Numbers												Dimensional Information							
	Black						Green													
	100% Tin			30 u" Gold			100% Tin			30 u" Gold										
	Printing Options			Printing Options			Printing Options			Printing Options			Dim. A		Dim B		Dim C		Dim D	
	None	10A	11A	None	10A	11A	None	10A	11A	None	10A	11A	mm	inch	mm	inch	mm	inch	mm	inch
2	395140002	395140102	395140202	395140502	395140602	395140702	395145002	395145102	395145202	395145502	395145602	395145702	18.0	.71	3.8	.15	12.8	.50	8.4	.33
3	395140003	395140103	395140203	395140503	395140603	395140703	395145003	395145103	395145203	395145503	395145603	395145703	21.8	.86	7.6	.30	16.6	.65	12.2	.48
4	395140004	395140104	395140204	395140504	395140604	395140704	395145004	395145104	395145204	395145504	395145604	395145704	25.6	1.01	11.4	.45	20.4	.80	16.0	.63
5	395140005	395140105	395140205	395140505	395140605	395140705	395145005	395145105	395145205	395145505	395145605	395145705	29.4	1.16	15.2	.60	24.2	.95	19.8	.78
6	395140006	395140106	395140206	395140506	395140606	395140706	395145006	395145106	395145206	395145506	395145606	395145706	33.3	1.31	19.1	.75	28.1	1.10	23.7	.93
7	395140007	395140107	395140207	395140507	395140607	395140707	395145007	395145107	395145207	395145507	395145607	395145707	37.1	1.46	22.9	.90	31.9	1.25	27.5	1.08
8	395140008	395140108	395140208	395140508	395140608	395140708	395145008	395145108	395145208	395145508	395145608	395145708	40.9	1.61	26.7	1.05	35.7	1.40	31.3	1.23
9	395140009	395140109	395140209	395140509	395140609	395140709	395145009	395145109	395145209	395145509	395145609	395145709	44.7	1.76	30.5	1.20	39.5	1.55	35.1	1.38
10	395140010	395140110	395140210	395140510	395140610	395140710	395145010	395145110	395145210	395145510	395145610	395145710	48.5	1.91	34.3	1.35	43.3	1.70	38.9	1.53
11	395140011	395140111	395140211	395140511	395140611	395140711	395145011	395145111	395145211	395145511	395145611	395145711	52.3	2.06	38.1	1.50	47.1	1.85	42.7	1.68
12	395140012	395140112	395140212	395140512	395140612	395140712	395145012	395145112	395145212	395145512	395145612	395145712	56.1	2.21	41.9	1.65	50.9	2.00	46.5	1.83
13	395140013	395140113	395140213	395140513	395140613	395140713	395145013	395145113	395145213	395145513	395145613	395145713	59.9	2.36	45.7	1.80	54.7	2.15	50.3	1.98
14	395140014	395140114	395140214	395140514	395140614	395140714	395145014	395145114	395145214	395145514	395145614	395145714	63.7	2.51	49.5	1.95	58.5	2.30	54.1	2.13
15	395140015	395140115	395140215	395140515	395140615	395140715	395145015	395145115	395145215	395145515	395145615	395145715	67.5	2.66	53.3	2.10	62.3	2.45	57.9	2.28
16	395140016	395140116	395140216	395140516	395140616	395140716	395145016	395145116	395145216	395145516	395145616	395145716	71.4	2.81	57.2	2.25	66.2	2.60	61.8	2.43
17	395140017	395140117	395140217	395140517	395140617	395140717	395145017	395145117	395145217	395145517	395145617	395145717	75.2	2.96	61.0	2.40	70.0	2.75	65.6	2.58
18	395140018	395140118	395140218	395140518	395140618	395140718	395145018	395145118	395145218	395145518	395145618	395145718	79.0	3.11	64.8	2.55	73.8	2.90	69.4	2.73
19	395140019	395140119	395140219	395140519	395140619	395140719	395145019	395145119	395145219	395145519	395145619	395145719	82.8	3.26	68.6	2.70	77.6	3.05	73.2	2.88
20	395140020	395140120	395140220	395140520	395140620	395140720	395145020	395145120	395145220	395145520	395145620	395145720	86.6	3.41	72.4	2.85	81.4	3.20	77.0	3.03

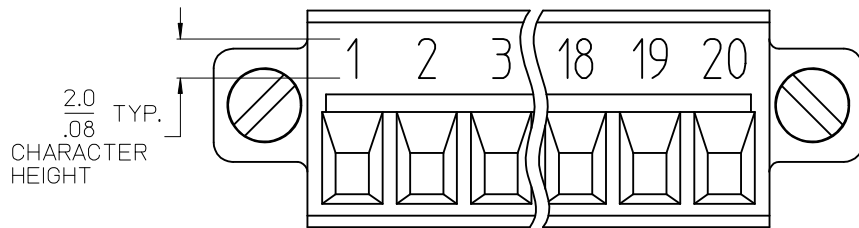

© 10A IMPRINTING

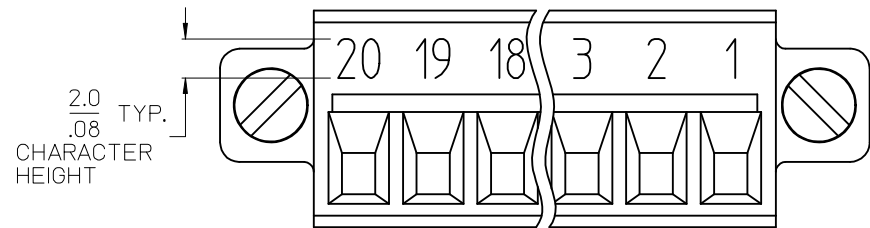

© 11A IMPRINTING

SEE SHEET ONE EC NO: WNA2009-0618 IDRWA/C.YORK 2009/04/29 CHKD:RDEROSS 2009/04/30 APPR:RDEROSS 2009/05/01 REV	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION			
		mm	INCH	DRAWN BY EHILE	DATE 2006/03/20	TITLE 3.81MM, EURO PLUG, RIGHT ANGLE, MTG ENDS					
		4 PLACES ± --- ± ---	3 PLACES ± --- ± .005	CHECKED BY EHILE	DATE 2006/03/20						
		2 PLACES ± 0.13 ± .01	1 PLACE ± 0.3 ± ---	APPROVED BY RDEROSS	DATE 2006/03/20	MOLEX INCORPORATED					
ANGULAR ± 2 °				MATERIAL NO.		DOCUMENT NO. SD-39514-001		SHEET NO. 2 OF 2			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				SIZE B		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					