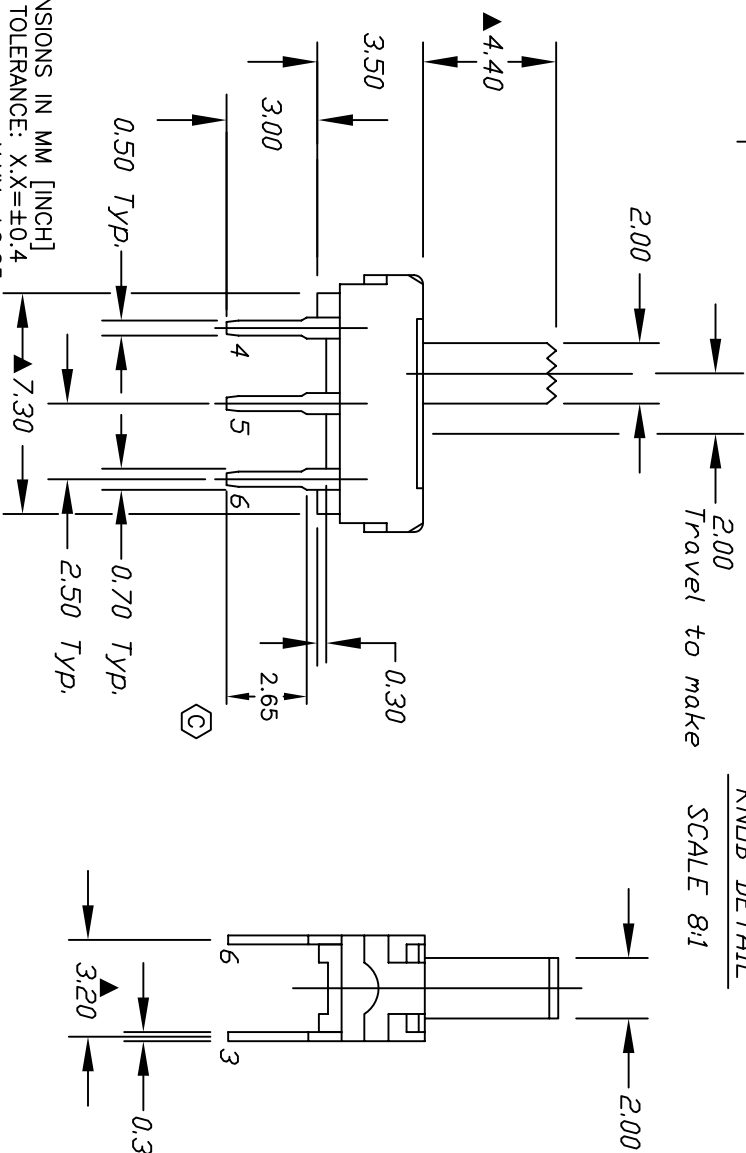


▲ CIRCUIT: SPDT
CONTACT CONFIGURATION

- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.X.X = \pm 0.25$
 3. TERM. NOS. FOR REFERENCE ONLY.
 4. OPERATING FORCE: 200 $\pm$ 150gf
 5. RATING: DC 30V@ 0.3A
 6. ▲ DENOTES MAJOR DIMENSIONS.
 7. 2002/95/EC (ROHS) COMPLIANT

				
TITLE EG1271A -SPDT NON-SHORTING				
SCALE 4:1	DATE 5/17/07	DR TN	DWG P040047	REV D